AIRCONDITIONER AMPLIFIER ASSY


551CE-01

REPLACEMENT

HINT:

Installation is in the reverse order of removal.

1. **REMOVE INSTRUMENT CLUSTER FINISH PANEL ASSY CENTER** (SEE PAGE 71–9)
2. **REMOVE FLOOR CARPET COVER CENTER RH** (SEE PAGE 71–9)
3. **REMOVE FLOOR CARPET COVER CENTER LH** (SEE PAGE 71–9)
4. **REMOVE FRONT SEAT ARMREST ASSY CENTER** (SEE PAGE 71–9)
5. **REMOVE CONSOLE BOX ASSY** (SEE PAGE 71–9)
6. **SEPARATE FLOOR SHIFT ASSY** (SEE PAGE 40–33)

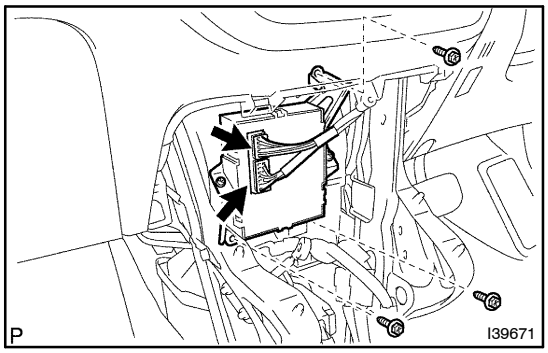

7. **REMOVE AIRCONDITIONER AMPLIFIER ASSY**

(a) Disconnect the 2 connectors.

(b) Remove the 3 screws and air conditioner amplifier assy.