RADIO RECEIVER ASSY


REPLACEMENT

67177–01

HINT:

- COMPONENTS: See page 67–2
- Installation is in the reverse order of removal.


1. REMOVE INSTRUMENT CLUSTER FINISH PANEL SUB–ASSY CENTER (SEE PAGE 71–9)

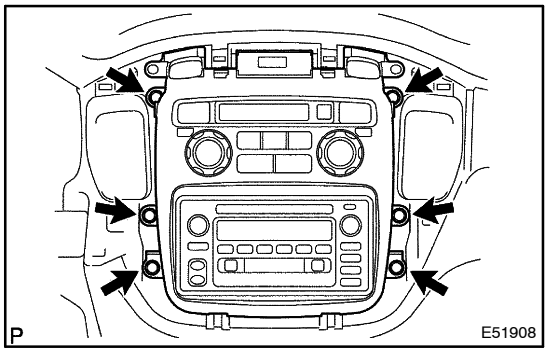

2. REMOVE INTEGRATION CONTROL & PANEL ASSY


(a) Remove the 6 bolts.

(b) Disconnect the connectors and remove the integration control & panel assy.

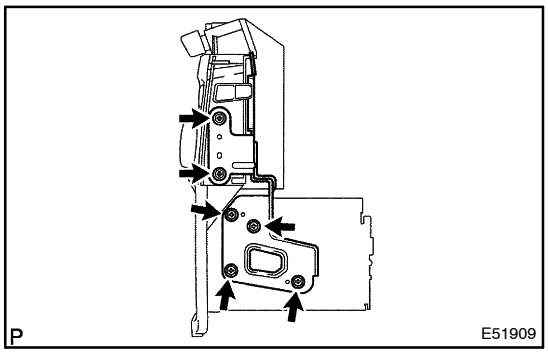


3. REMOVE RADIO BRACKET NO.1

(a) Remove the 4 bolts, 2 screws and radio bracket No.1.

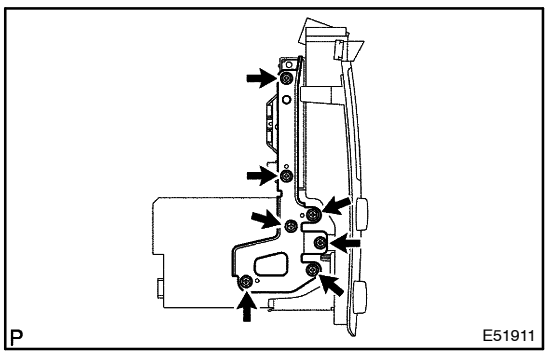


4. REMOVE MULTI–DISPLAY CONTROLER BRACKET A (W/ EMV & NAVIGATION SYSTEM)

(a) Remove the 7 screws and multi–display controller bracket A.

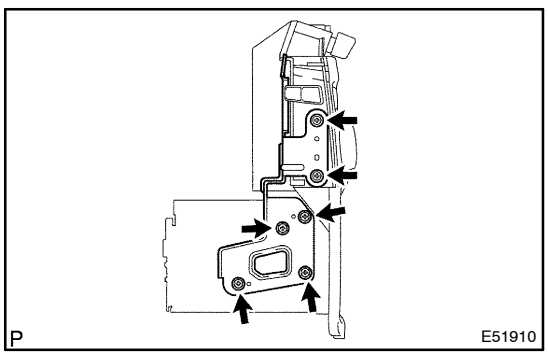

5. REMOVE RADIO BRACKET NO.2

(a) Remove the 4 bolts, 2 screws and radio bracket No.2.

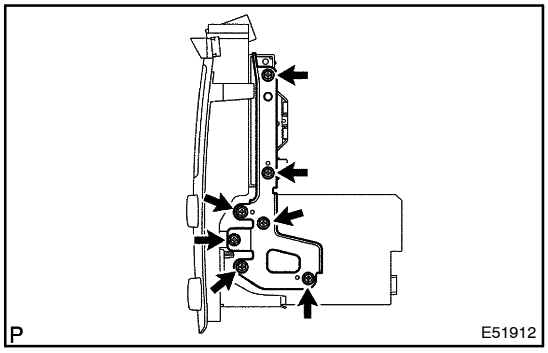

6. REMOVE MULTI–DISPLAY CONTROLER BRACKET B (W/ EMV & NAVIGATION SYSTEM)

(a) Remove the 7 screws and multi–display controller bracket B.

7. REMOVE RADIO RECEIVER ASSY