ANTENNA CORD SUB–ASSY NO.2

REPLACEMENT

6717E–01

HINT:

- COMPONENTS: See page 67–2
- Installation is in the reverse order of removal.


1. REMOVE INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/PASSENGER AIR BAG ASSY (SEE PAGE 71–9)

HINT:

Refer to the procedures up to ’REMOVE INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/ PASSENGER AIRBAG ASSY”.

2. REMOVE ANTENNA CORD SUB–ASSY NO.2

(a) Remove the 4 clamps and antenna cord sub–assy No.2.

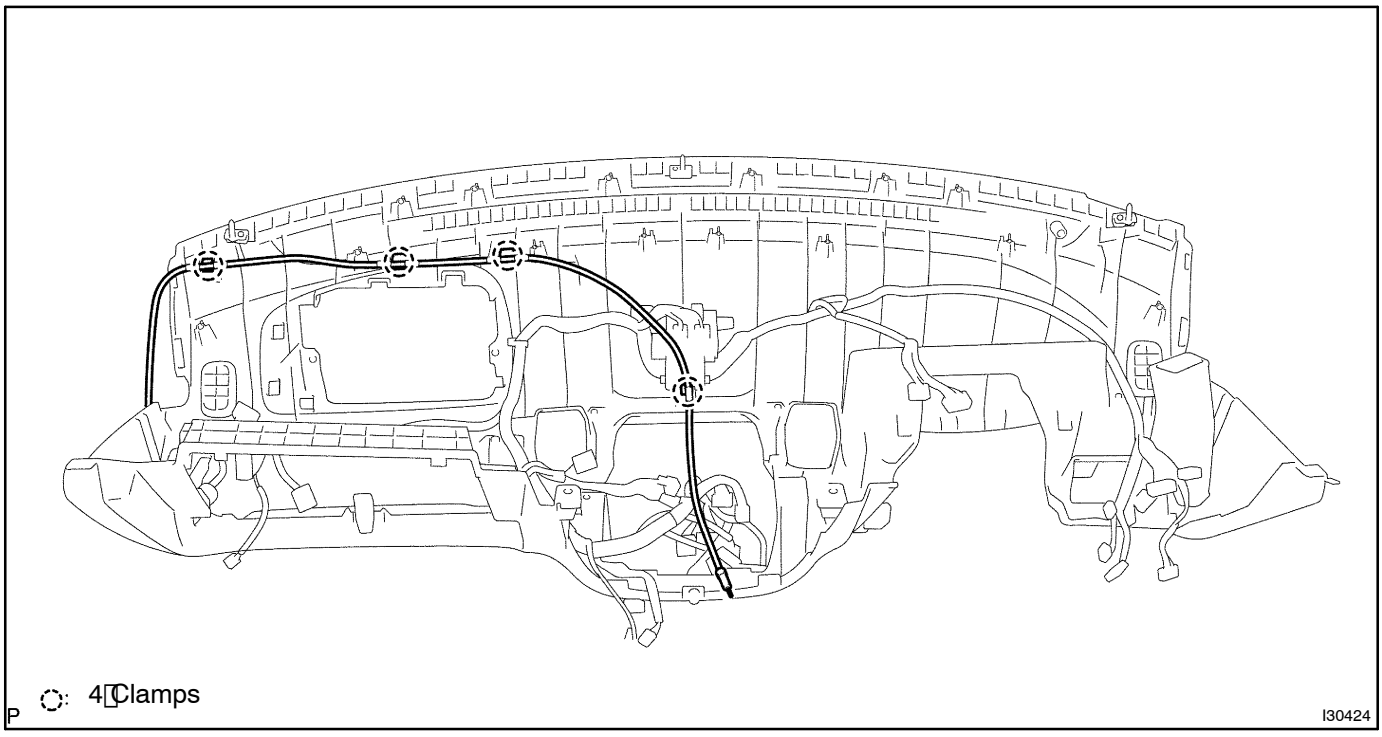

3. INSTALL INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/PASSENGER AIR BAG ASSY (SEE PAGE 71–9)

HINT:

Refer to the procedures from ”INSTALL INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/ PASSENGER AIRBAG ASSY”.