NAVIGATION ANTENNA ASSY


REPLACEMENT

6717F–01

1. REMOVE INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/PASSENGER AIR BAG ASSY (SEE PAGE 71–9)

HINT:

Refer to the procedures up to "REMOVE INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/ PASSENGER AIRBAG ASSY".

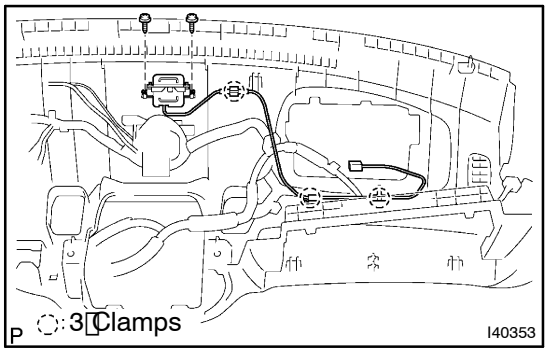

2. REMOVE NAVIGATION ANTENNA ASSY

(a) Release the 3 clamps and remove the 2 screws and the navigation antenna assy.

3. INSTALL INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/PASSENGER AIR BAG ASSY (SEE PAGE 71–9)

HINT:

Refer to the procedures from "INSTALL INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/ PASSENGER AIRBAG ASSY".