
INNER REAR VIEW MIRROR ASSY

70130–01

REPLACEMENT

HINT:

The installation procedures are the removal procedures in reverse order.

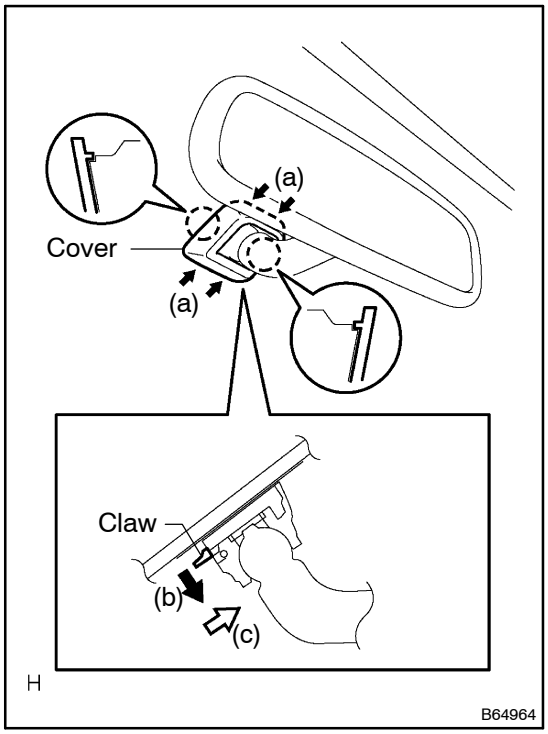

1. REMOVE INNER REAR VIEW MIRROR ASSY

(a) Push the cover in the direction indicated by the arrows (a) and remove it.

(b) While holding down the claw in the direction of the block arrow (b), slide the inner rear view mirror assy in the direction of the while arrow (c) and remove it.