COMBINATION METER ASSY


710ME–01

OVERHAUL

HINT:

The installation is in the reverse order of the removal. However, when there is a special point concerning the installation, it is indicated.

1. **REMOVE INSTRUMENT CLUSTER FINISH PANEL SUB–ASSY CENTER** (SEE PAGE 71–9)
2. **REMOVE INSTRUMENT PANEL FINISH PANEL LOWER** (SEE PAGE 71–9)
3. **REMOVE INSTRUMENT CLUSTER FINISH PANEL ASSY** (SEE PAGE 71–9)
4. **REMOVE INSTRUMENT CLUSTER FINISH PANEL GARNISH** (SEE PAGE 71–9)
5. **REMOVE COMBINATION METER ASSY** (SEE PAGE 71–9)

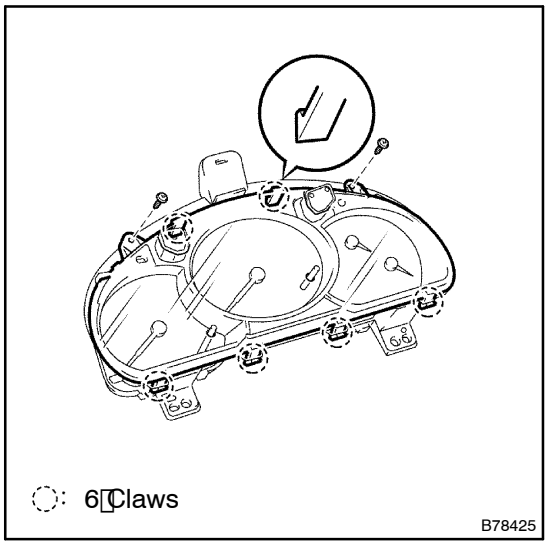

6. REMOVE COMBINATION METER GLASS

(a) Remove the 2 screws.

(b) Disengage the 6 claws and remove the combination meter glass.