REAR DOOR BELT MOULDING ASSY LH


7617Z–01

REPLACEMENT

HINT:

- The installation procedures are the removal procedures in reverse order.
- Use the same procedures for the RH side and LH side.

1. **REMOVE DOOR PULL HANDLE** (See page 75–13)
2. **REMOVE REAR DOOR TRIM BOARD SUB–ASSY LH** (See page 75–13)

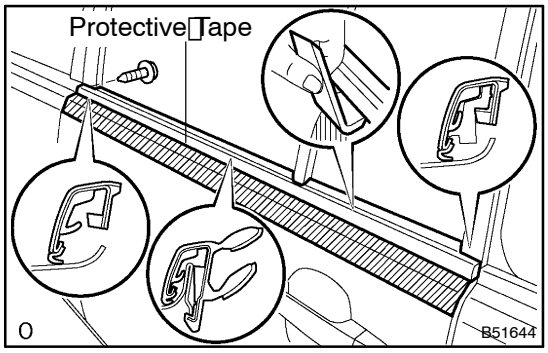

3. **REMOVE REAR DOOR BELT MOULDING ASSY LH**

(a) Remove the screw.

(b) Put protective tape under the moulding.

(c) Using a moulding remover or scraper, pry out the moulding.