
FRONT CROSSMEMBER NO. 1 REINFORCEMENT (ASSY)

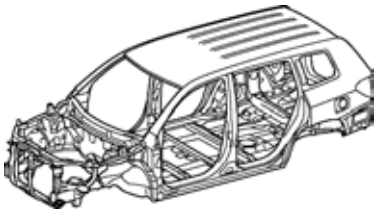

F28380A


With the radiator side support and front crossmember removed.

Symbol meaning

REMOVAL	▲ : Remove Weld Points
INSTALLATION	■ : Plug Weld

F28380B

REMOVAL·INSTALLATION

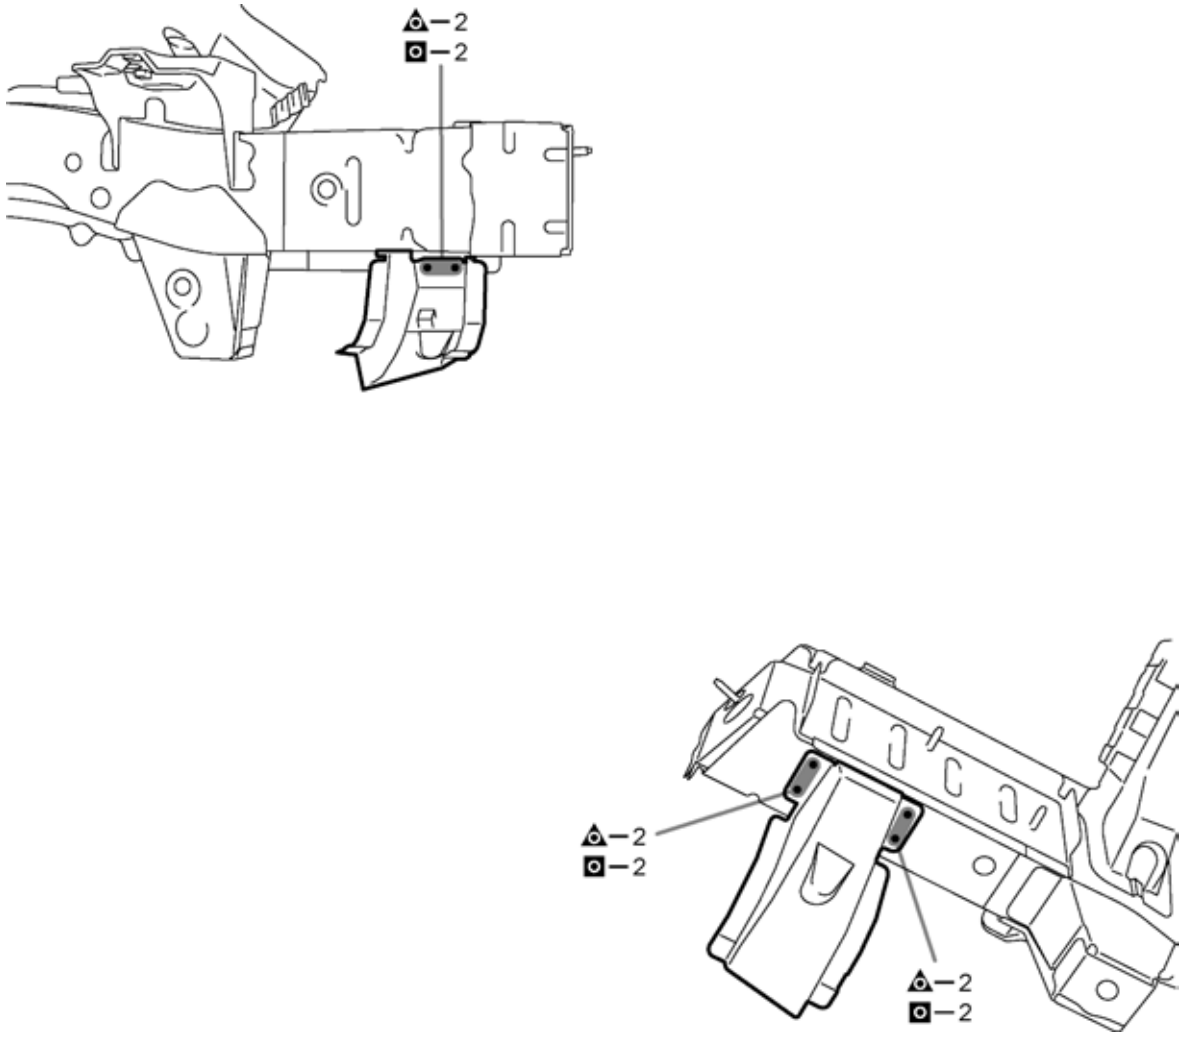

F28380

INSTALLATION POINT

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)

2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.