
# REAR FLOOR NO. 2 CROSSMEMBER (ASSY)

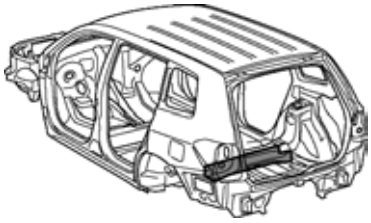


F28430A

Symbol meaning

| | |
|---|---|
| REMOVAL | ▲ ▲ : Remove Weld Points |
| INSTALLATION | ● I : Plug Weld |

F28430B

**REMOVAL·INSTALLATION**

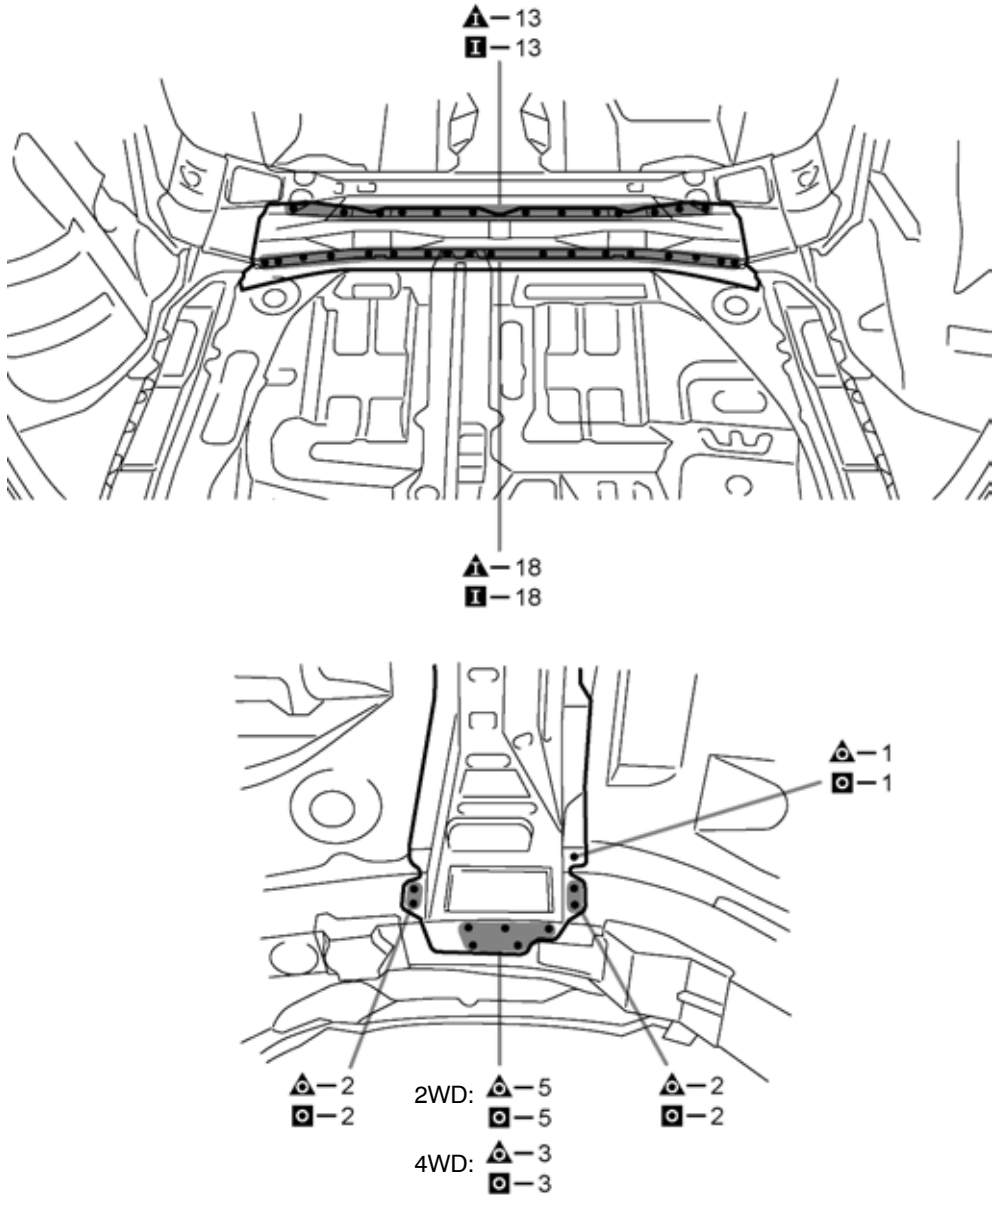


F28430

**INSTALLATION POINT**

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
2 After welding, apply undercoating to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.