

BODY PANEL ANTI-CHIPPING PAINT APPLICATION AREAS

1 To protect the body from damage due to gravel, apply the anti-chipping paint to the rocker panels, wheel arches, and lower parts of the doors.
HINT:
1) Work must be performed while wearing the appropriate protective gear and in a well-ventilated area.
2) Apply anti-chipping paint to the indicated areas first, before applying the top coat.
3) If anti-chipping paint is unnecessarily applied to an area, apply degreasing agent to a clean cloth and clean the paint off immediately.



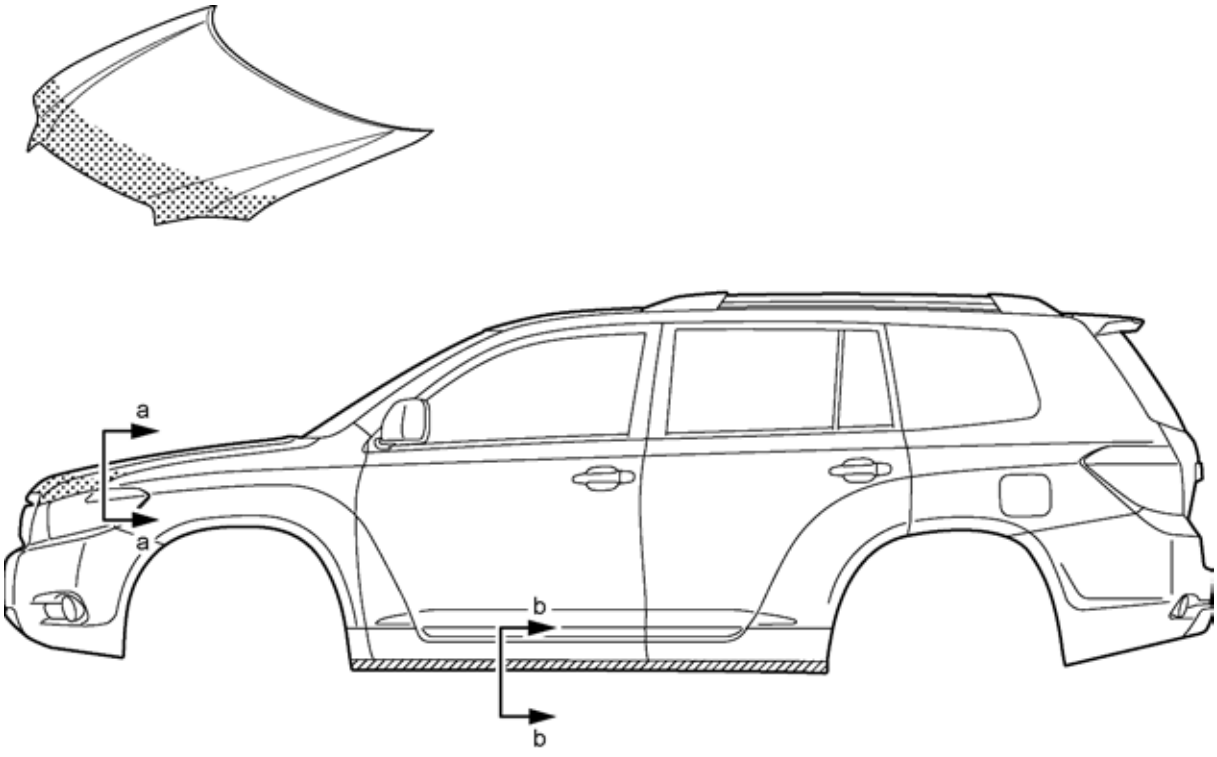

a - a



b - b

SOFT-CHIP PRIMER (COLD AREA)

ANTI-CHIPPING PAINT (INTERMEDIATE COAT)

F28362