
■ TRANSFER

The transfer is provided with an independent lubrication system. Hypoid gear oil is used for this transfer.

- In order to ensure cooling performance, large fins are used on the transfer case.

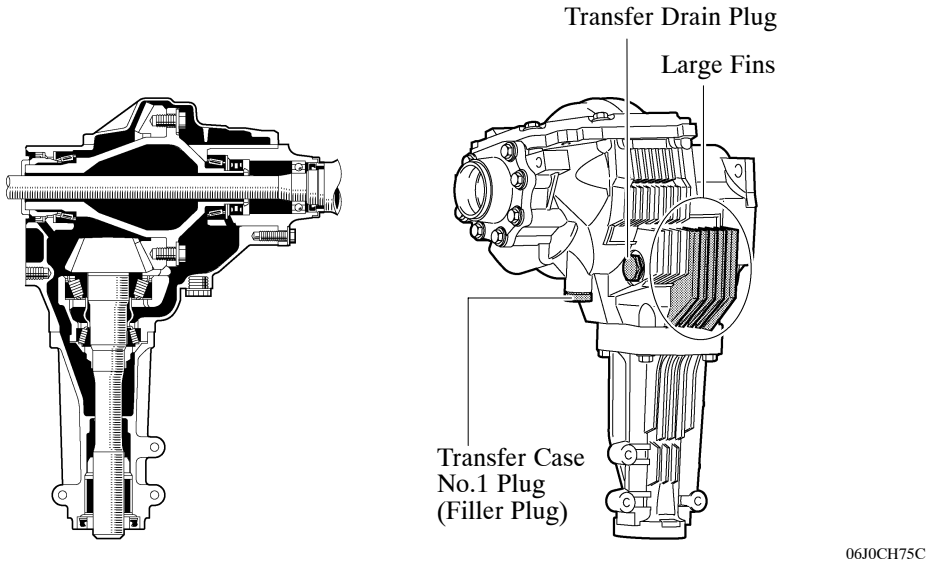

▶ Specifications ◀

Transfer Type	MF2A
Reduction Gear Ratio	0.341
Oil Viscosity	SAE 90*1/ SAE 80W-90 or 80W*2
Oil Type	Hypoid Gear Oil API GL-5
Oil Capacity liters (US qts, Imp. qts)	0.9 (0.95, 0.79)

*1: Temperatures above -18°C (0°F) *2: Temperatures below -18°C (0°F)