
FRONT SIDE MEMBER (ASSY)

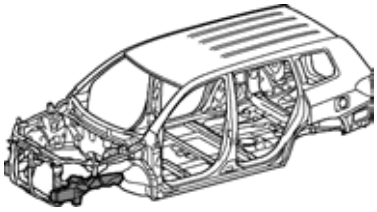

F28389A


With the front crossmember No. 1 reinforcement and front fender apron removed.

Symbol meaning

: Remove Weld Points

F28389B

REMOVAL

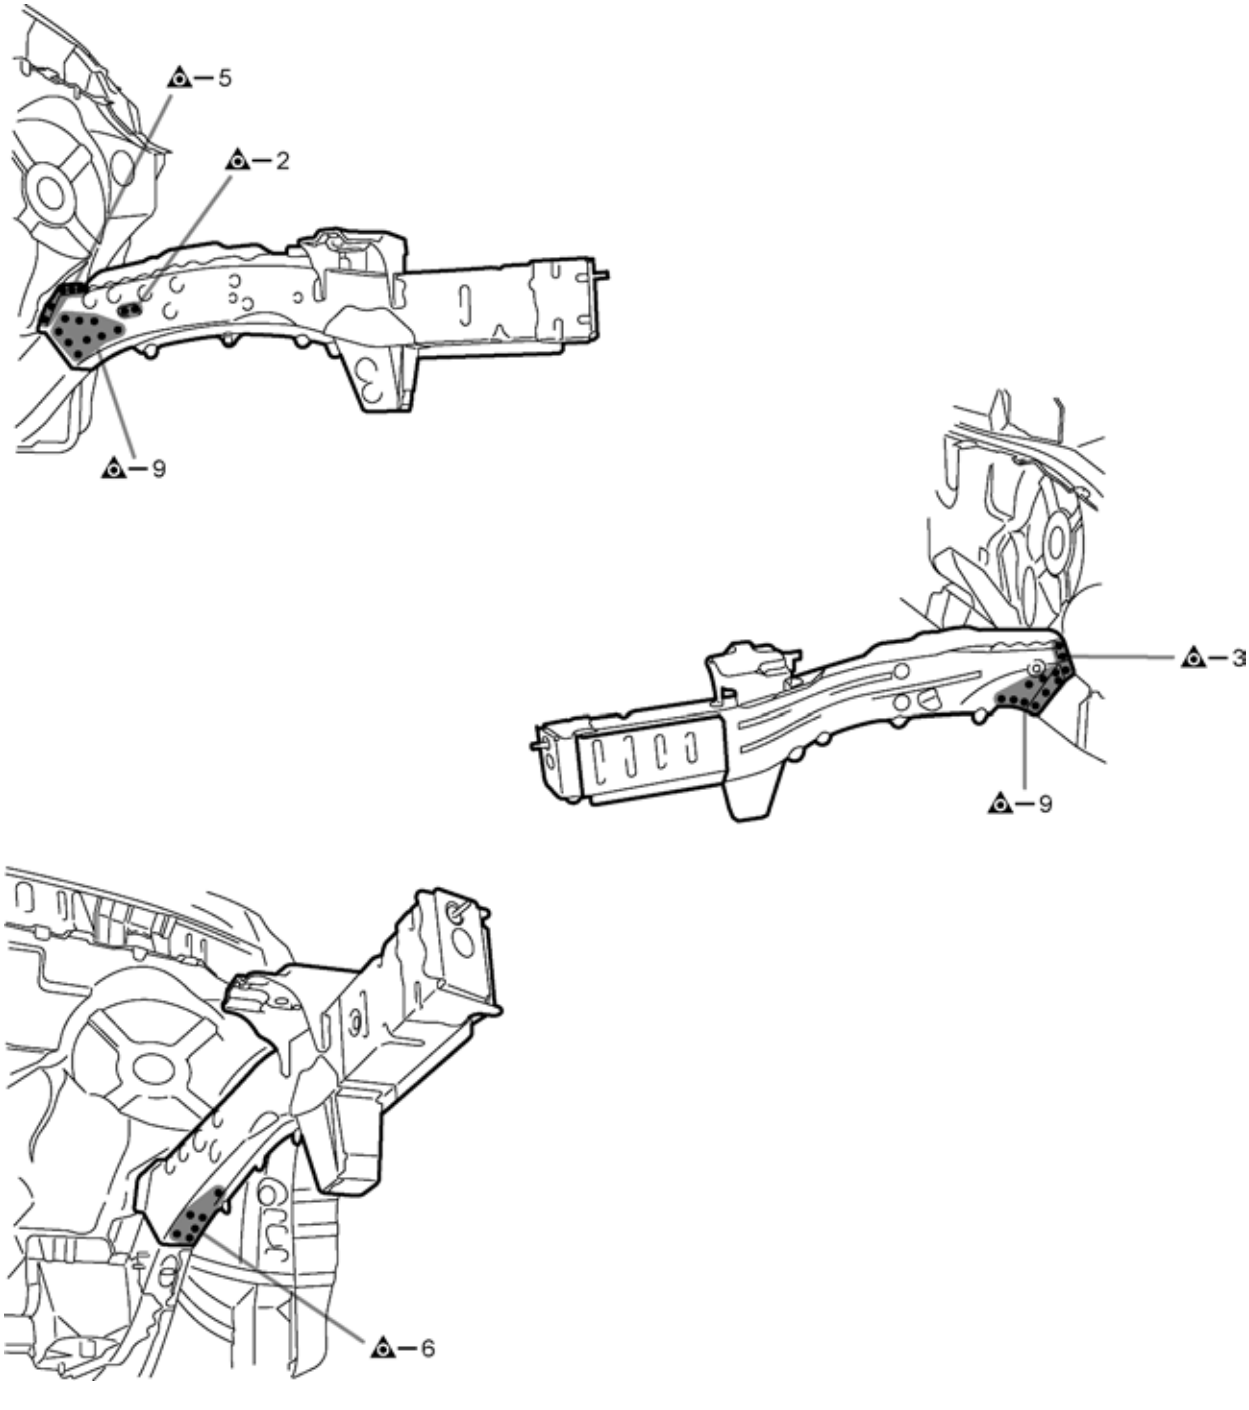


F28389

Symbol meaning

: Plug Weld

F28390B

INSTALLATION

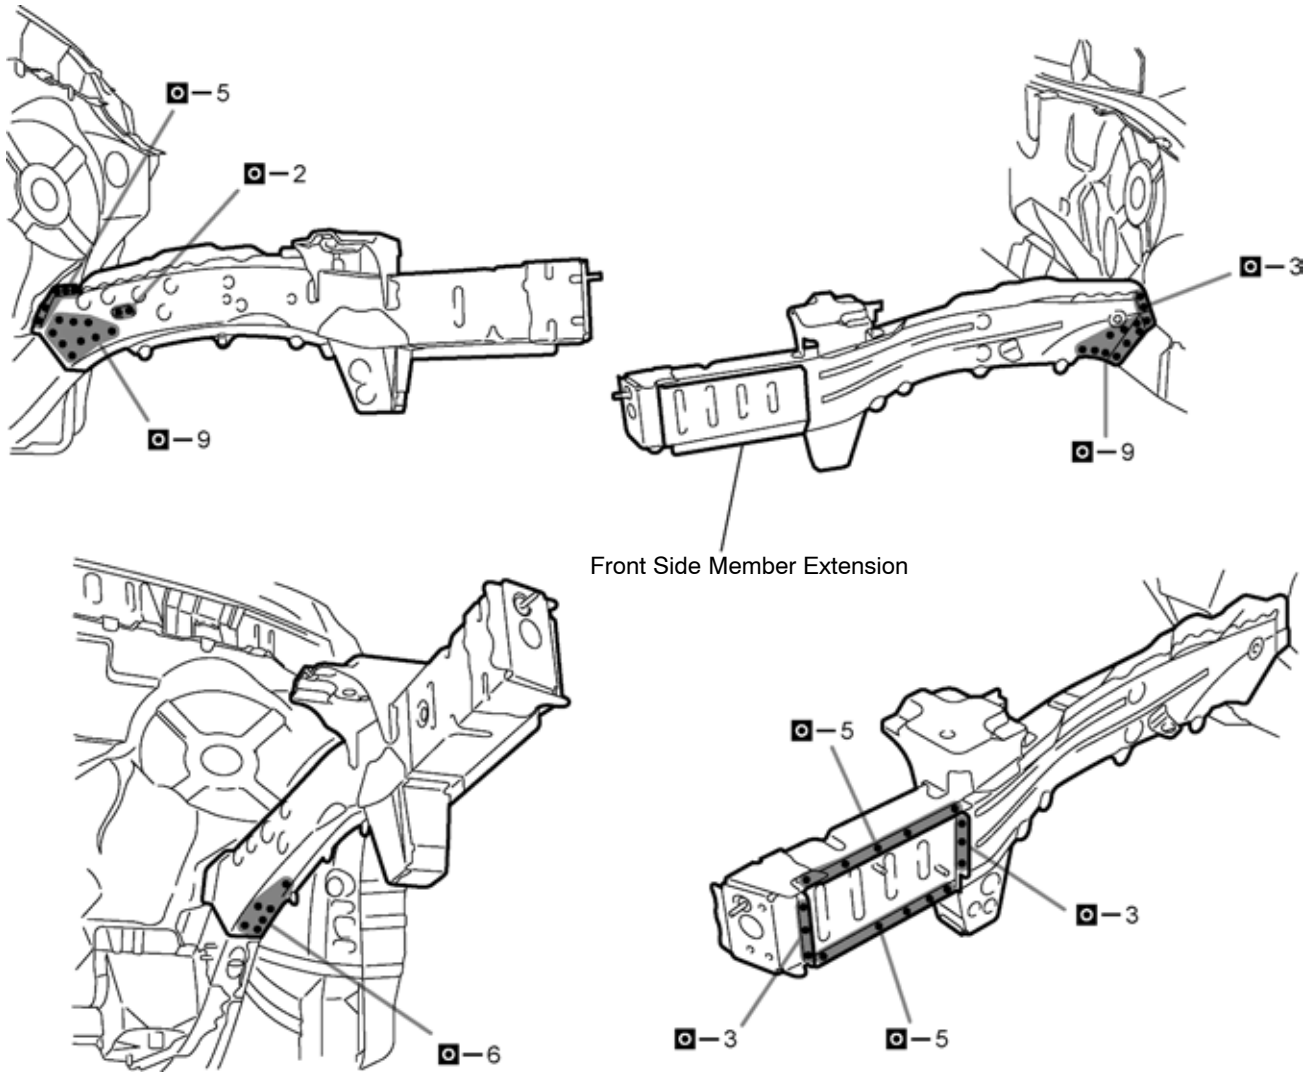

CAUTION

Make sure to attach correctly in accordance with the body dimension diagram as this part affects the front wheel alignment.

F28390

INSTALLATION POINT

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
2 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.