
# 3RD SEAT FLOOR SIDE PANEL (ASSY)

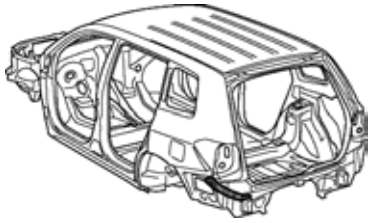

F28422A


With the body lower back panel removed.

Symbol meaning

| | |
|---|---|
| REMOVAL | A A : Remove Weld Points |
| INSTALLATION | P I : Plug Weld |

F28422B

**REMOVAL·INSTALLATION**

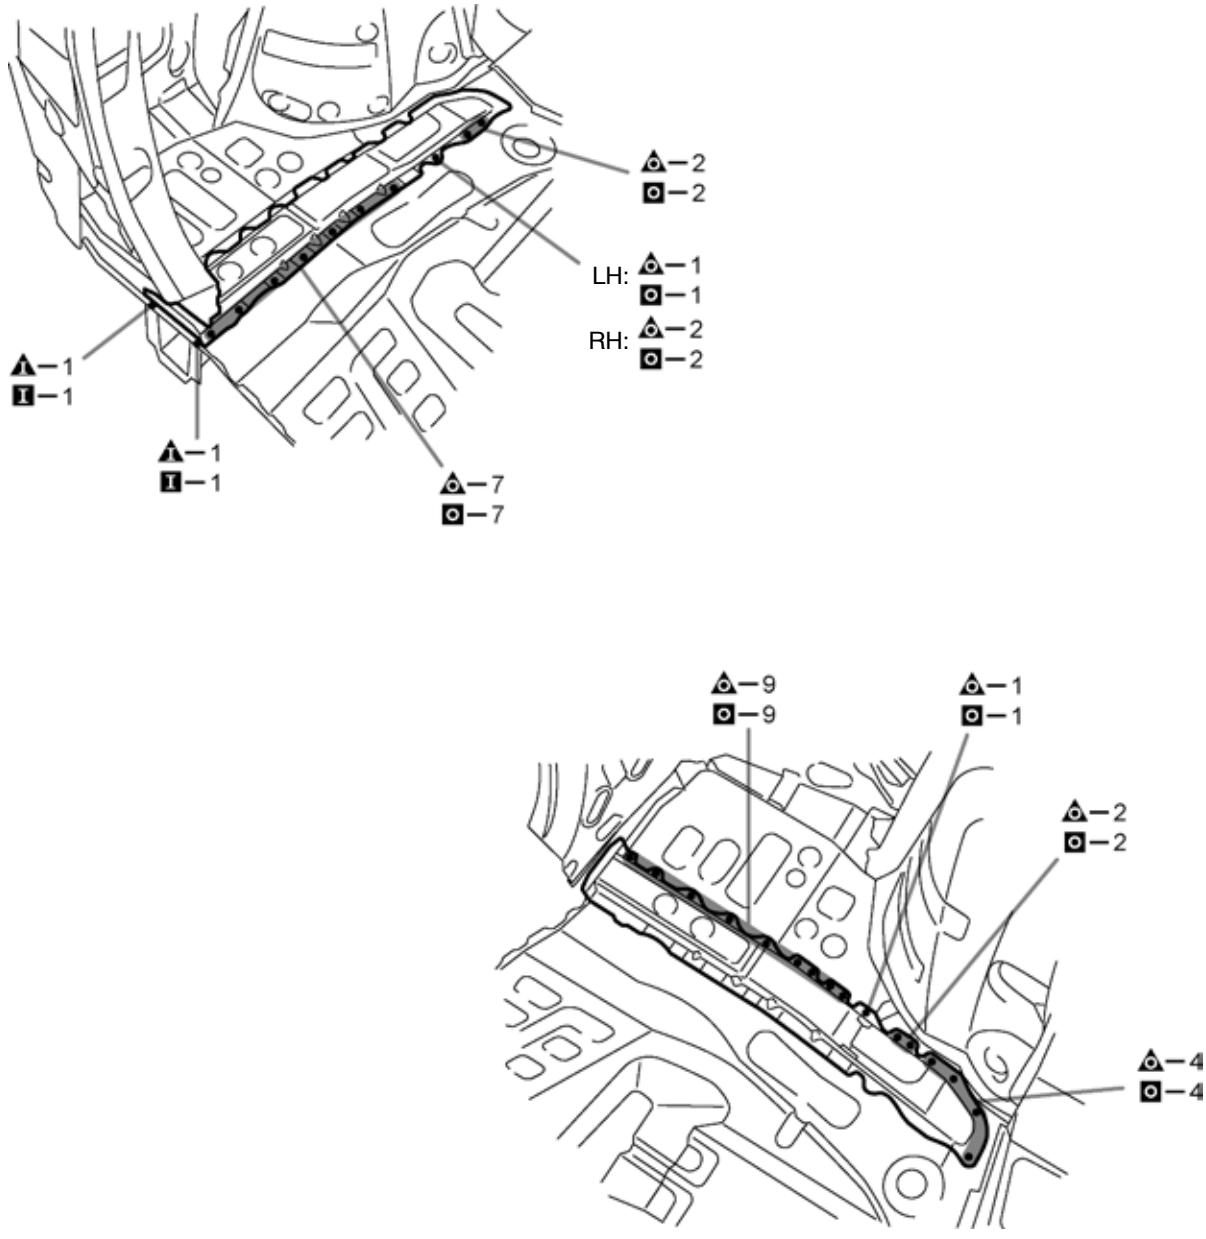


F28422

**INSTALLATION POINT**

1 After welding, apply body sealer to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.