
■TOYOTA GENUINE ATF WS

Toyota genuine ATF WS is used to reduce the flow resistance of the ATF and ensure fuel economy by reducing its viscosity in the practical operation range. At the high-temperature end, its viscosity is the same as that of the Toyota genuine ATF type T-IV, to ensure the durability of the automatic transaxle.
There is no interchangeability between Toyota genuine ATF WS and other types of ATF (Toyota genuine ATF Type T-IV, D-II).

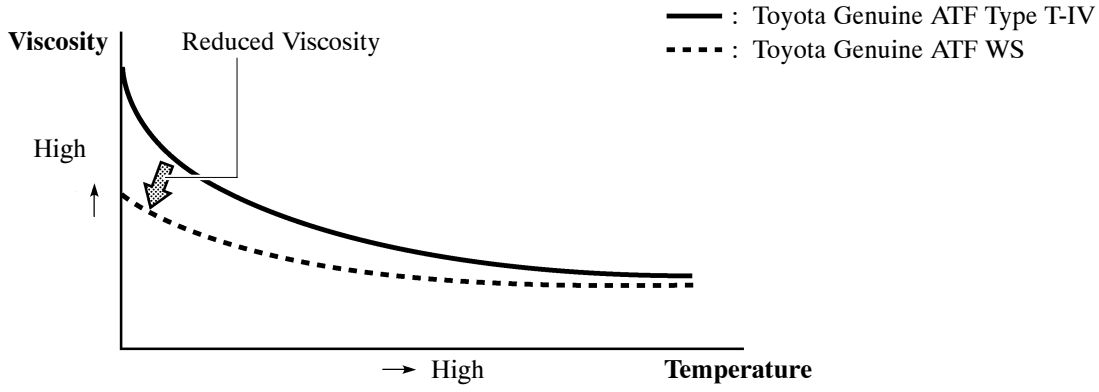

259LSK03