
3RD SEAT FLOOR SIDE PANEL (ASSY)

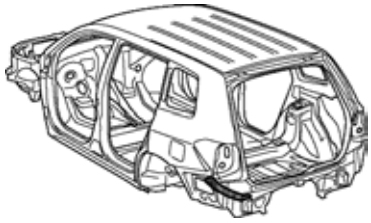

F28422A


With the body lower back panel removed.

Symbol meaning

REMOVAL	A A : Remove Weld Points
INSTALLATION	P I : Plug Weld

F28422B

REMOVAL·INSTALLATION

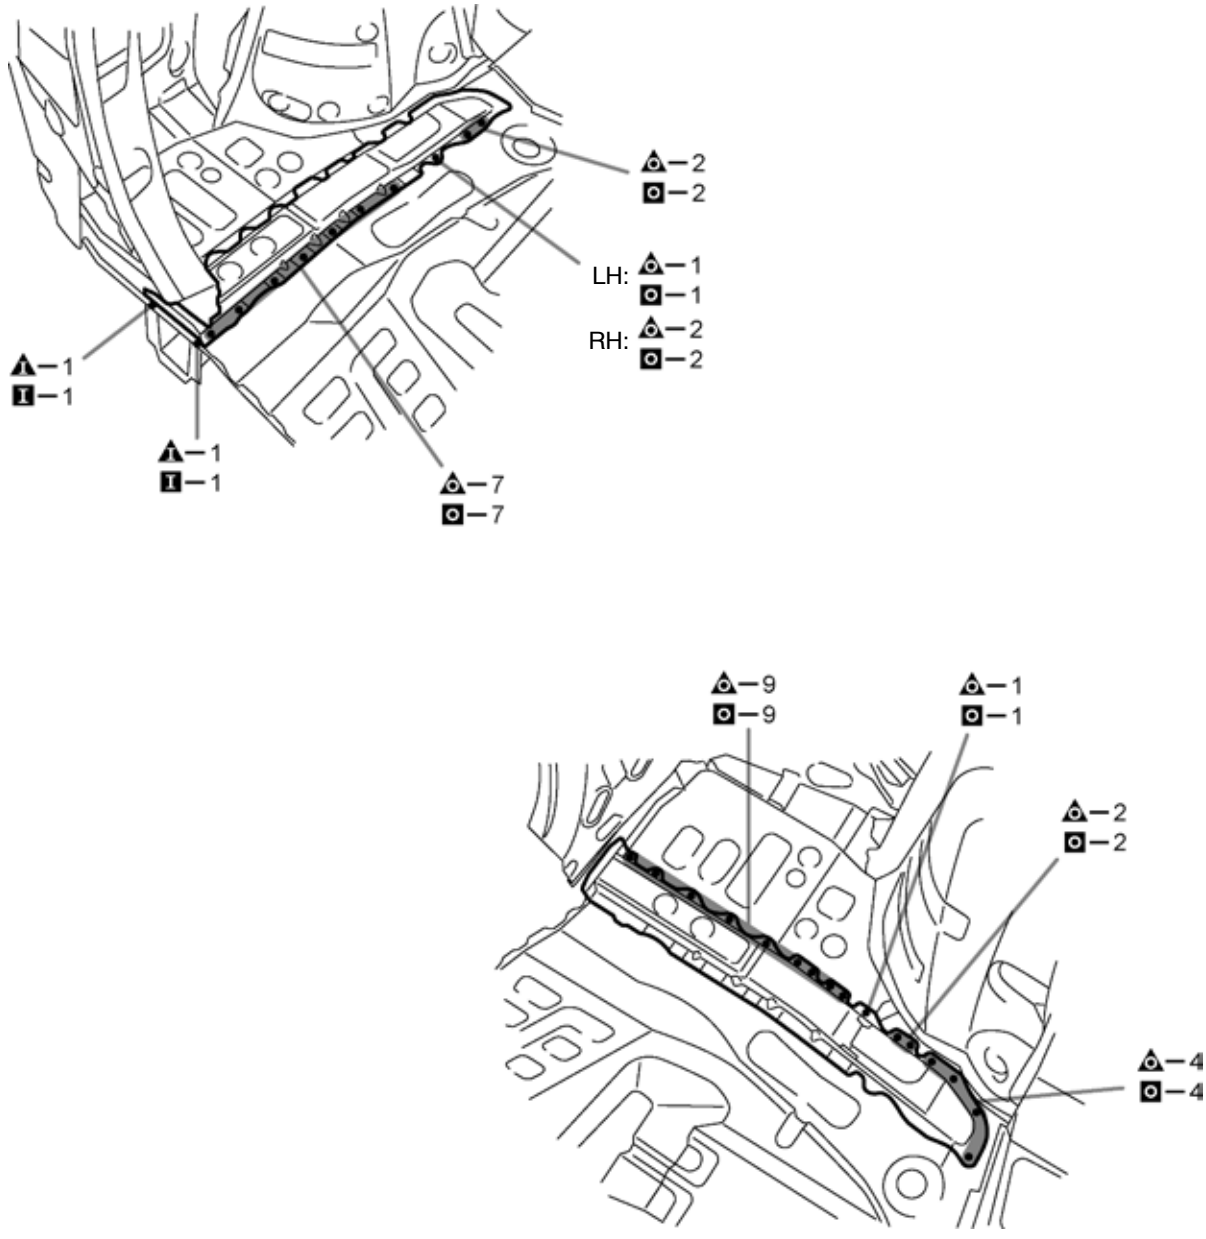

F28422

INSTALLATION POINT

1 After welding, apply body sealer to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.