
REAR FLOOR CENTER CROSSMEMBER (ASSY)

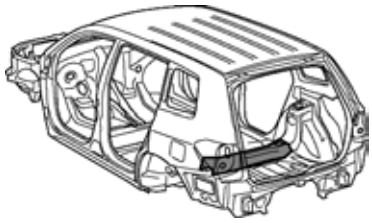


F28423A

Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: Plug Weld

F28423B

REMOVAL·INSTALLATION

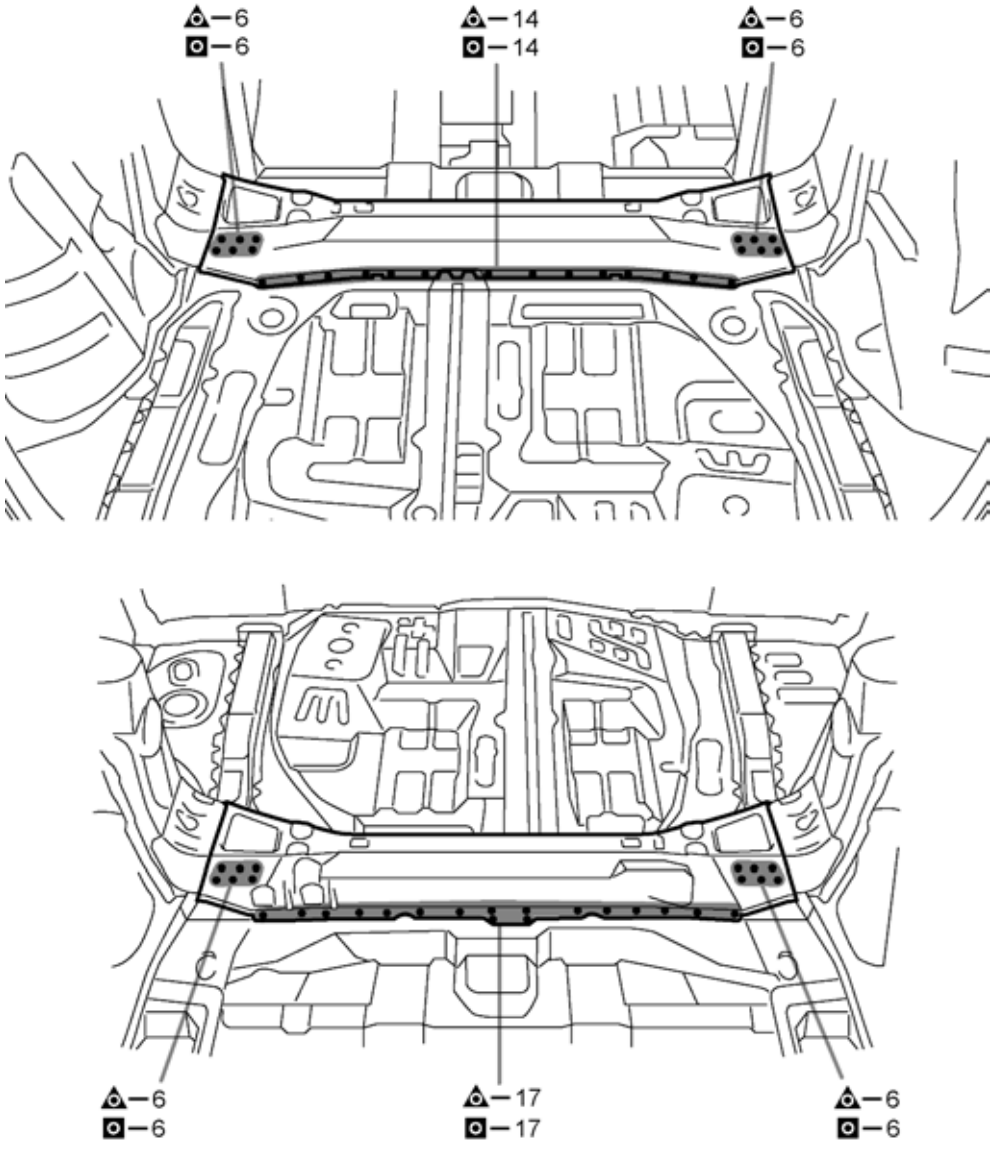

F28960

INSTALLATION POINT

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
2 After wilding, apply body sealer to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.