



RADIATOR SIDE SUPPORT (ASSY)

REPLACEMENT



F20972-A


REMOVAL

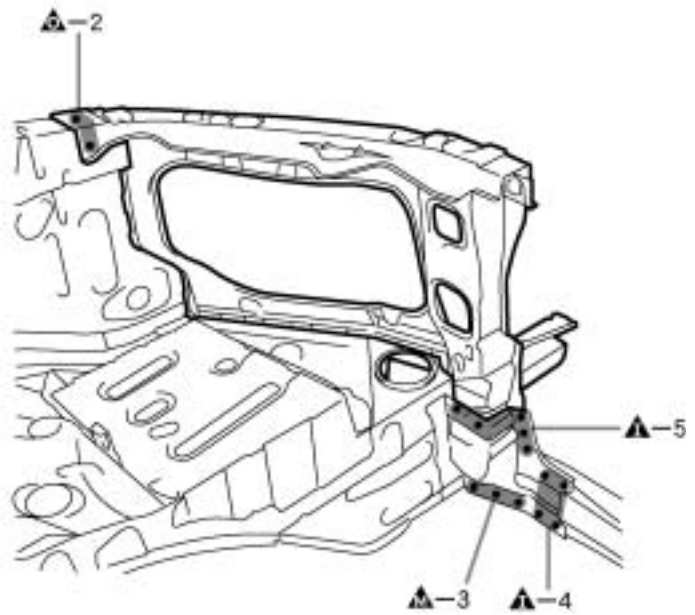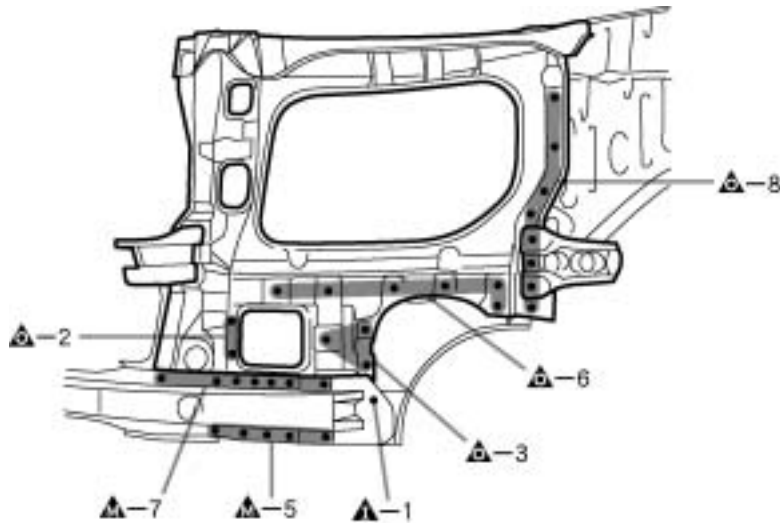

F20972

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

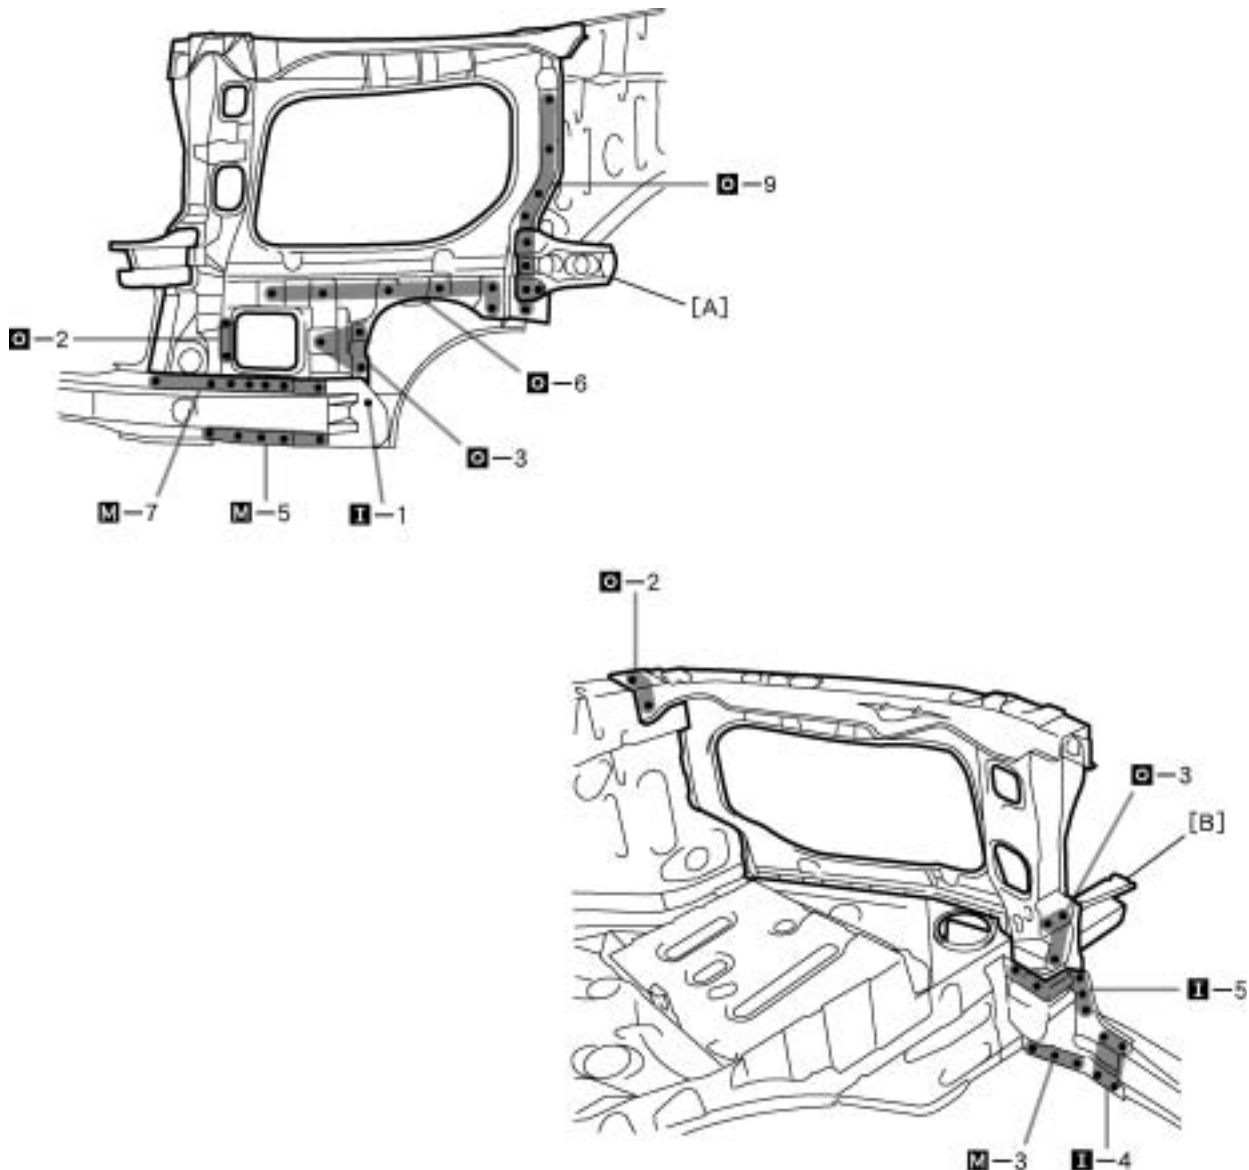

F20973


POINT

- 1 Inspect the fitting of the headlight and front fender, etc., before welding, since affects the appearance of the finish.

PART NAME

[A] Radiator Support To Front Fender Bracket

[B] Front End Panel No. 1 Extension

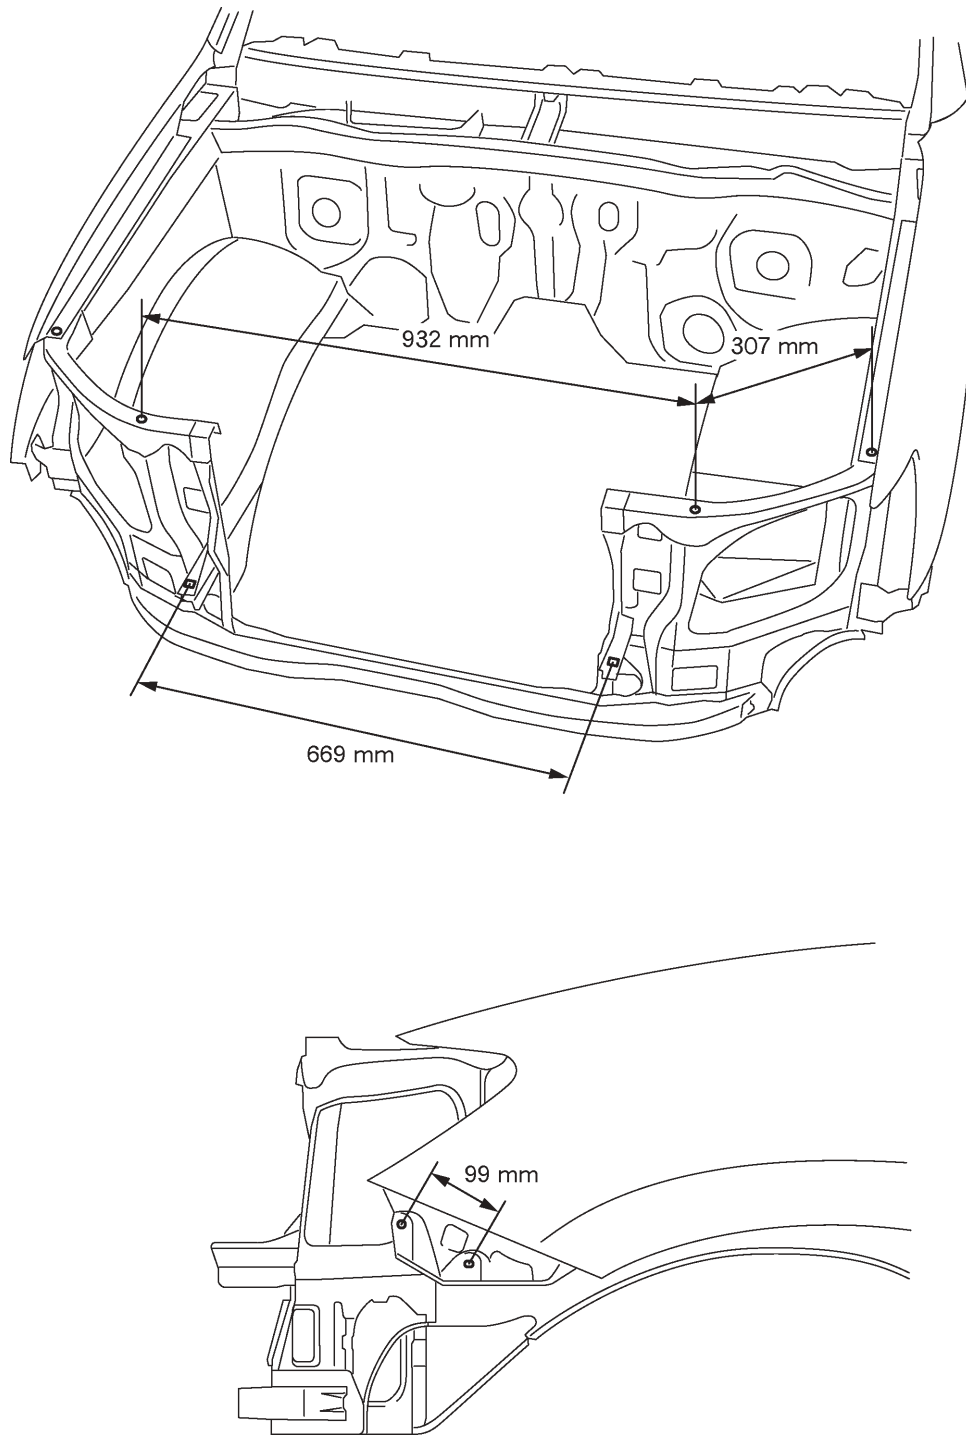

F20974

POINT

- 1 Measure the dimensions before installing headlights.
- 2 These values are reference values.

99 mm (3.90 in.)

307 mm (12.09 in.)

669 mm (26.34 in.)

932 mm (36.69 in.)