


OUTER PANEL INSTALLATION TORQUE

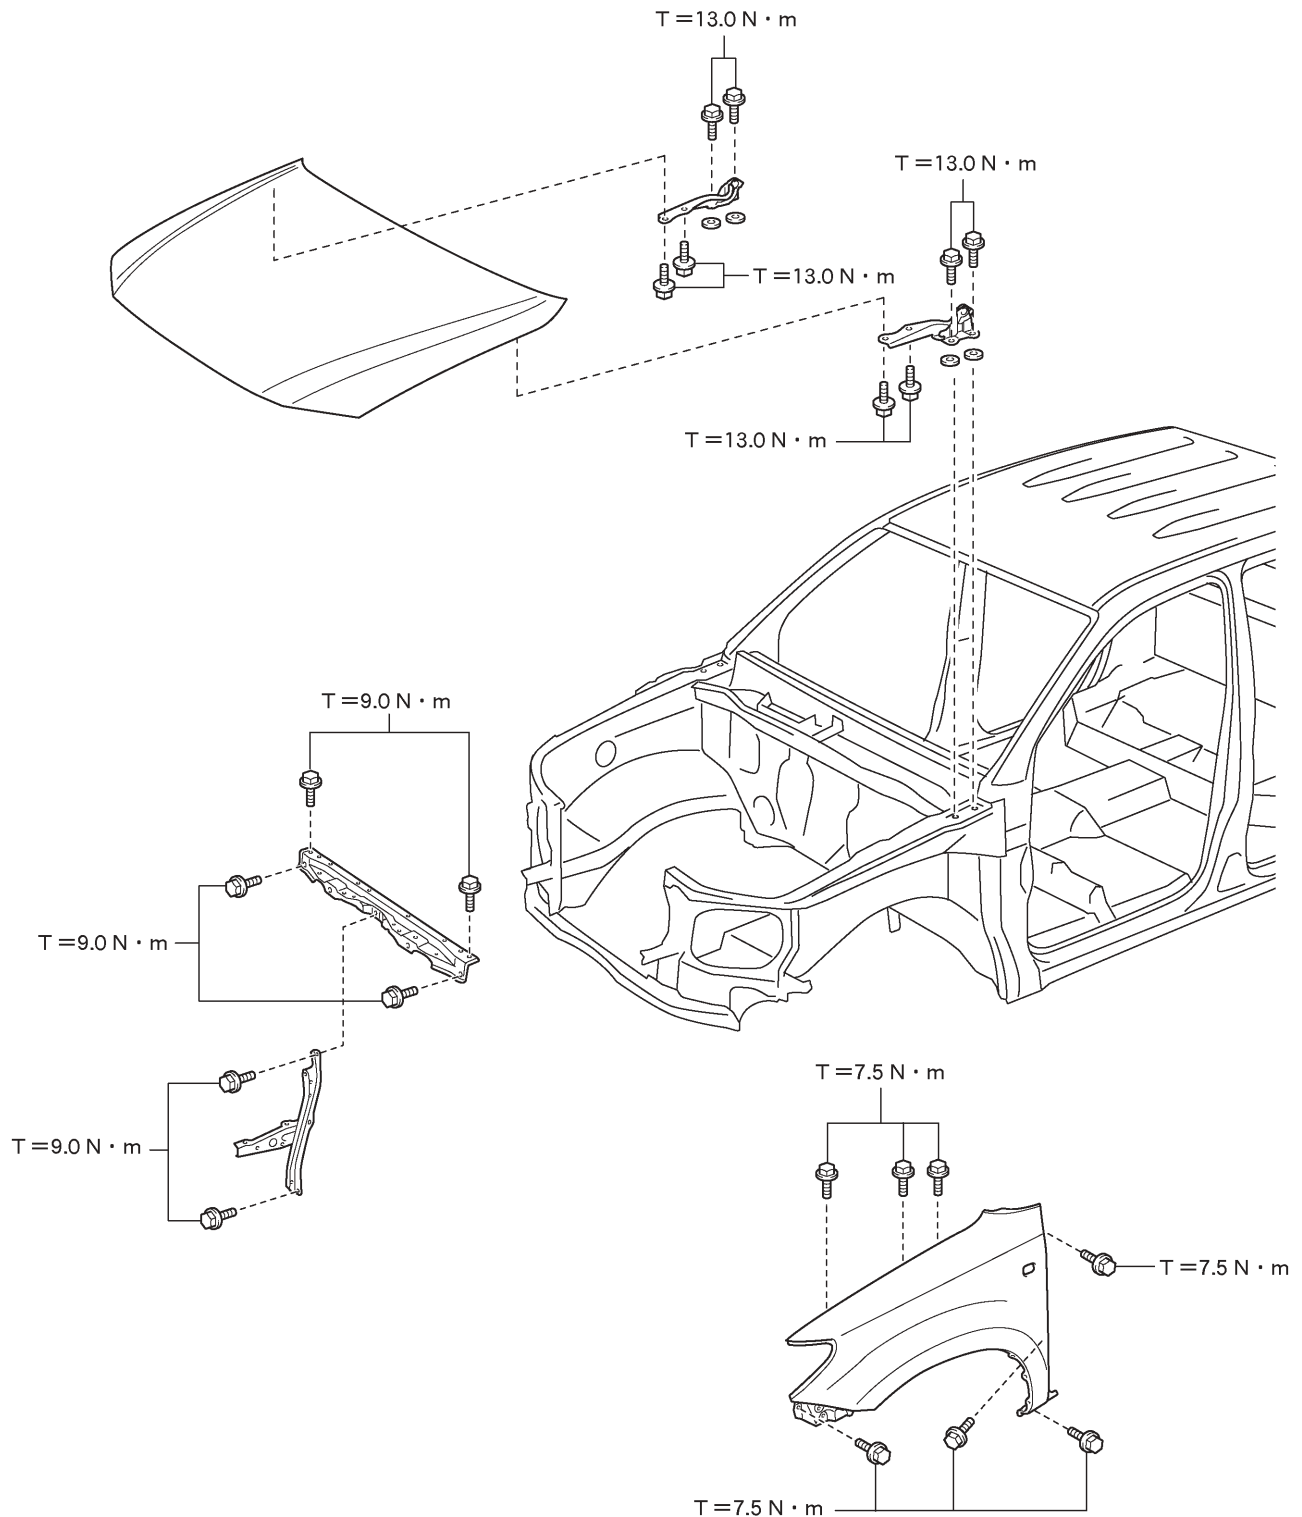


F20966


7.5 N·m (76.5 kgf·cm, 66 in·lbf)

9.0 N·m (91.8 kgf·cm, 80 in·lbf)

13.0 N·m (132.6 kgf·cm, 10 ft·lbf)

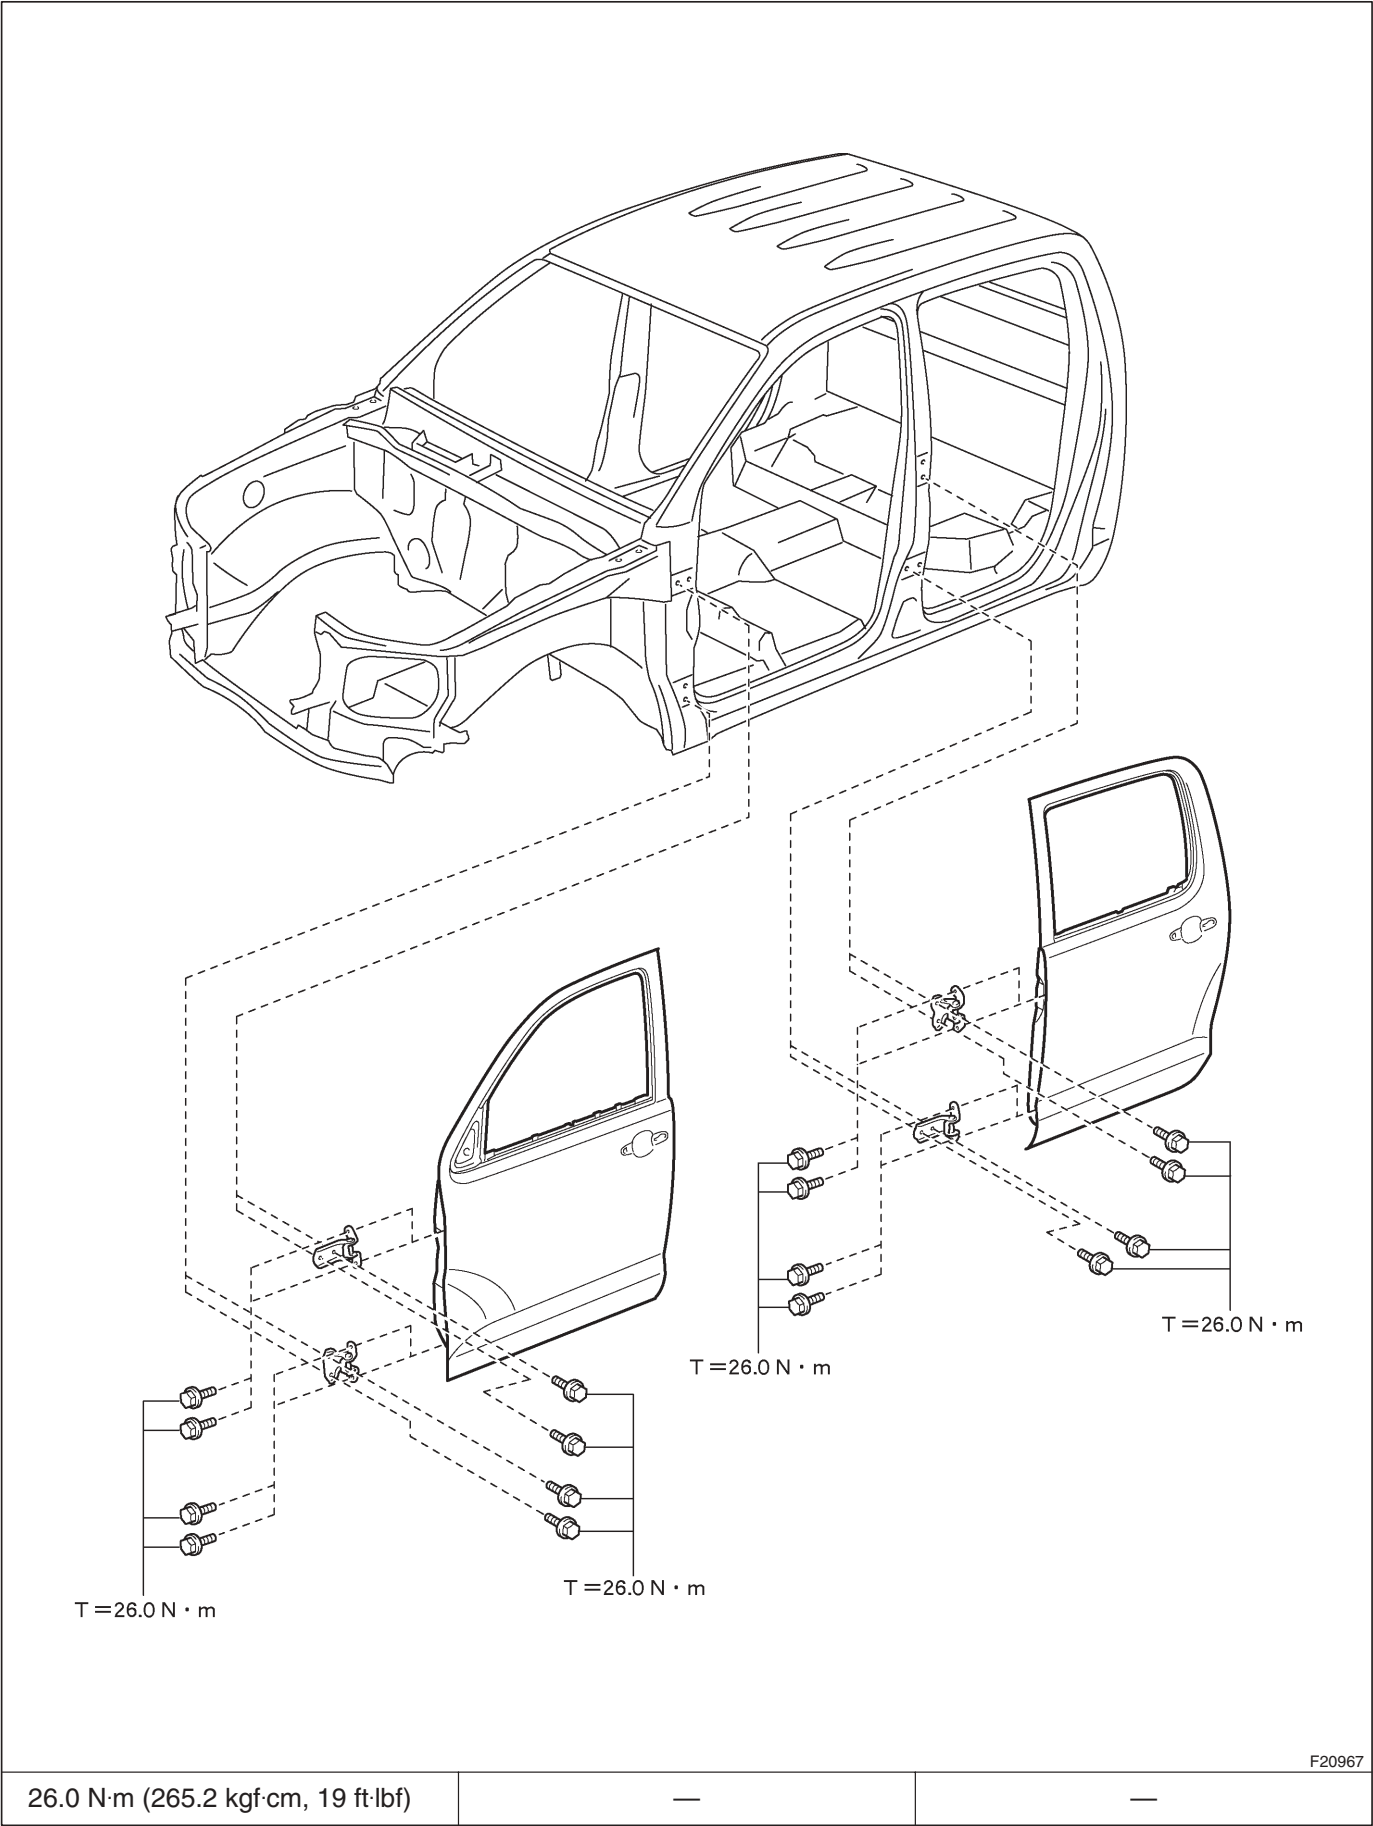


26.0 N·m (265.2 kgf·cm, 19 ft·lbf)	—	—
------------------------------------	---	---

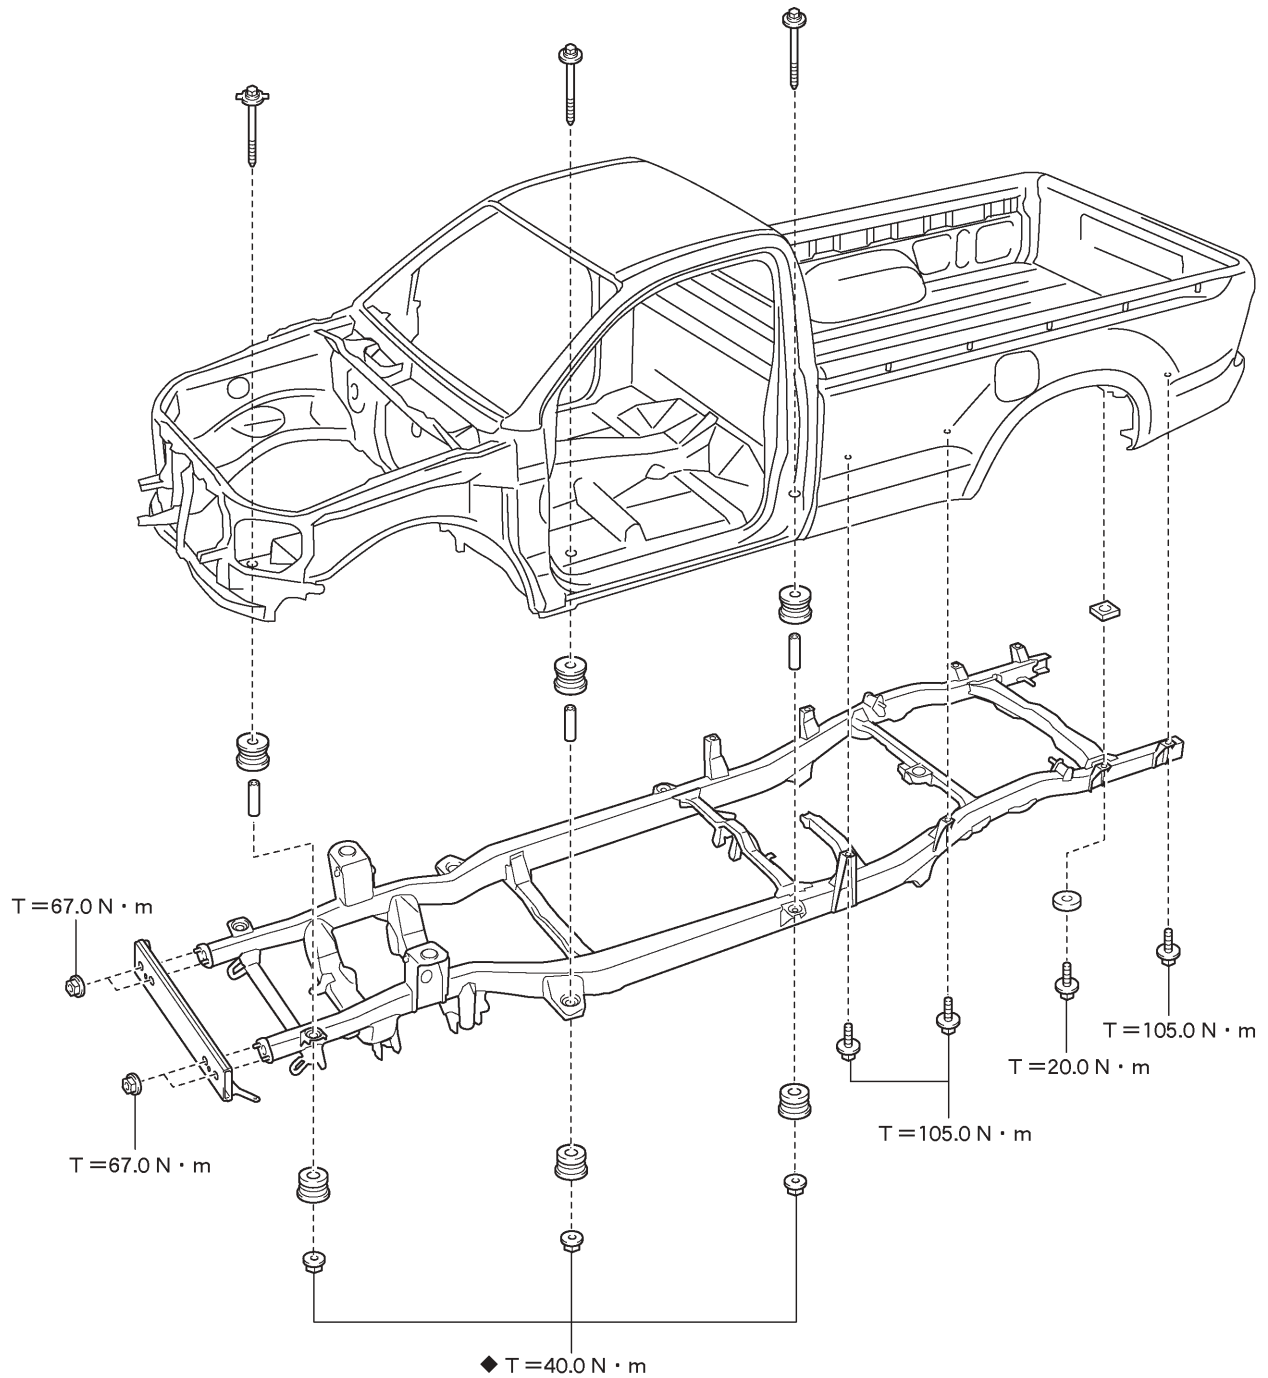

◆ Non-reusable part

F20968

20.0 N·m (204.0 kgf·cm, 15 ft-lbf)	40.0 N·m (408.0 kgf·cm, 30 ft-lbf)	67.0 N·m (683.4 kgf·cm, 49 ft-lbf)
105.0 N·m (1071.0 kgf·cm, 77 ft-lbf)	—	—

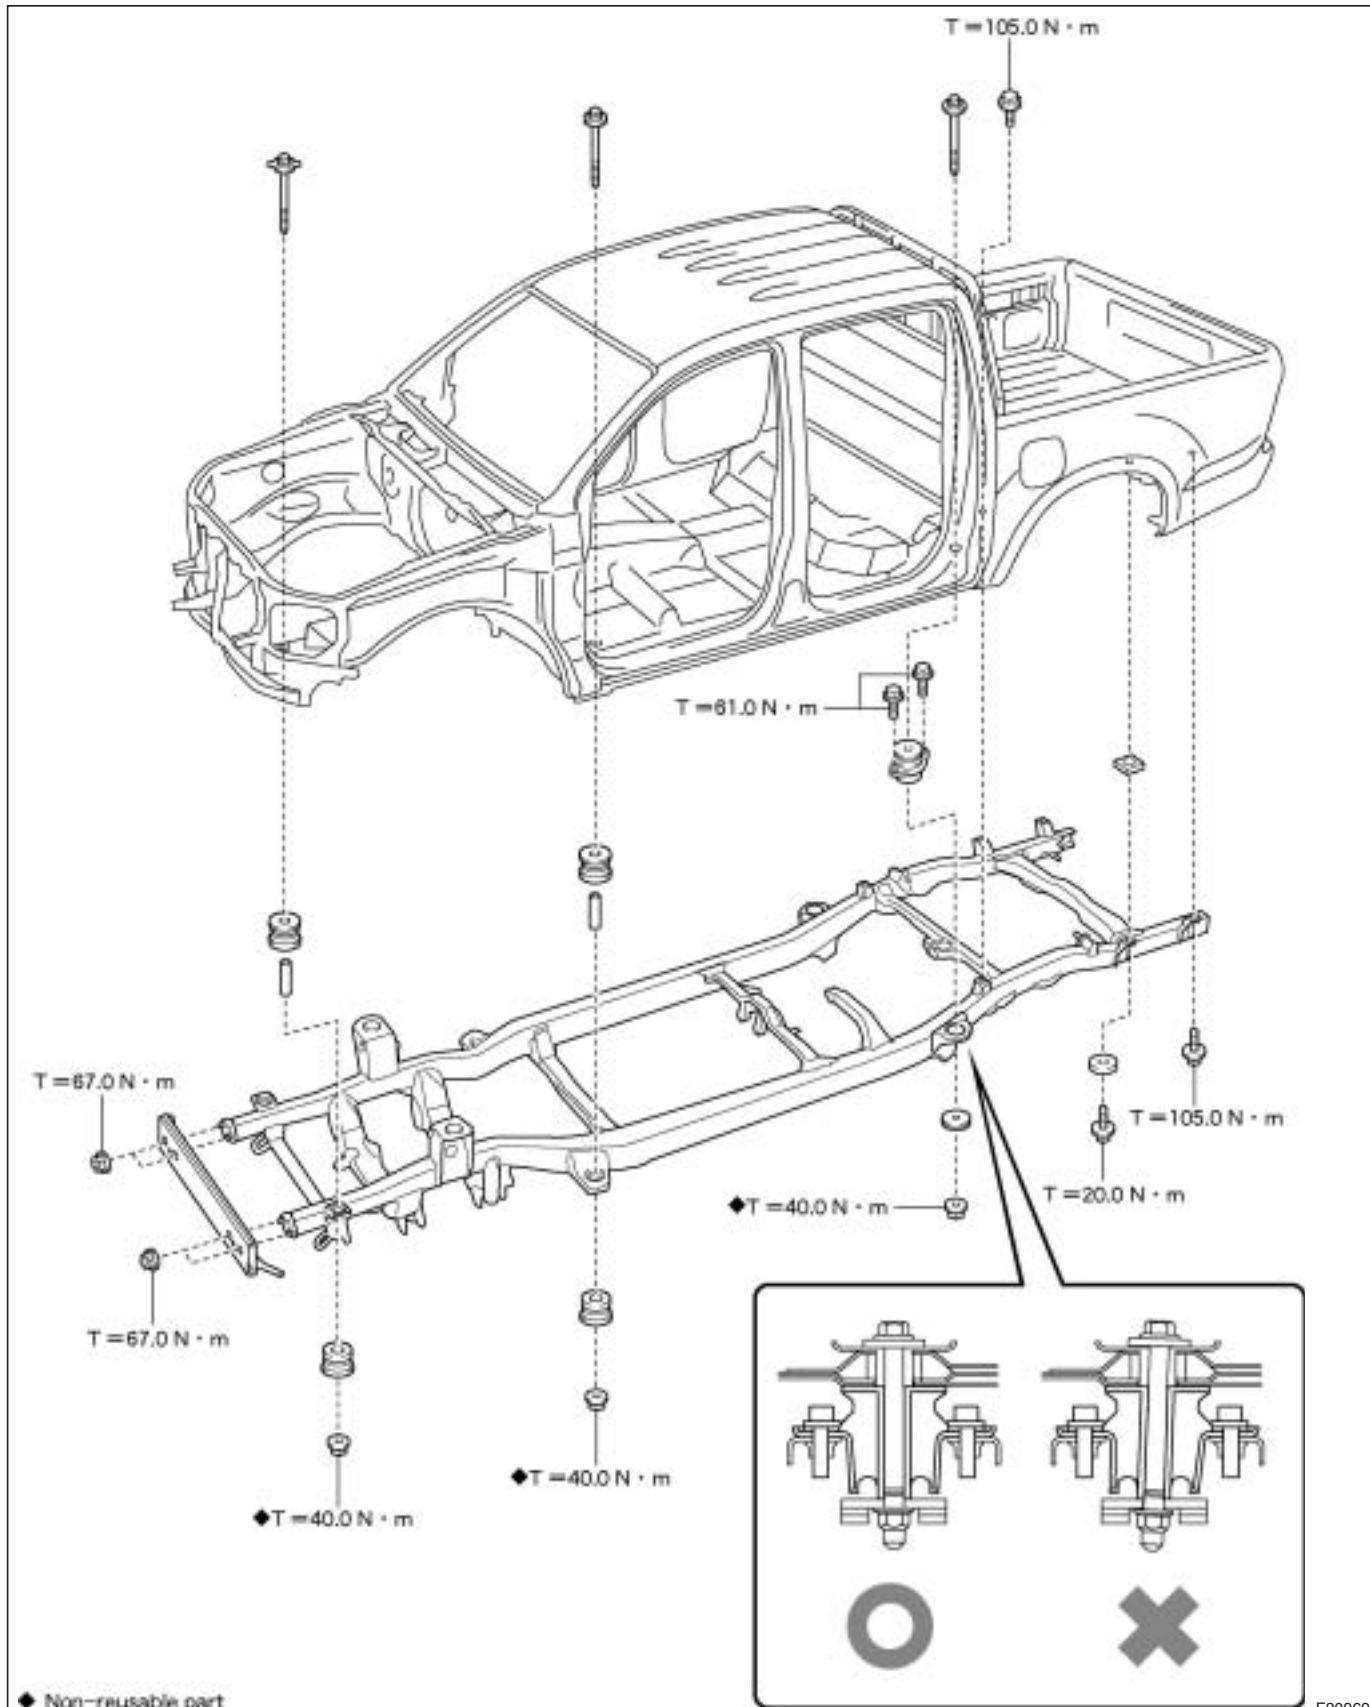

F20969

20.0 N·m (204.0 kgf·cm, 15 ft-lbf)	40.0 N·m (408.0 kgf·cm, 30 ft-lbf)	61.0 N·m (622.2 kgf·cm, 45 ft-lbf)
67.0 N·m (683.4 kgf·cm, 49 ft-lbf)	105.0 N·m (1071.0 kgf·cm, 77 ft-lbf)	—



20.0 N·m (204.0 kgf·cm, 15 ft-lbf)	40.0 N·m (408.0 kgf·cm, 30 ft-lbf)	61.0 N·m (622.2 kgf·cm, 45 ft-lbf)
67.0 N·m (683.4 kgf·cm, 49 ft-lbf)	105.0 N·m (1071.0 kgf·cm, 77 ft-lbf)	—