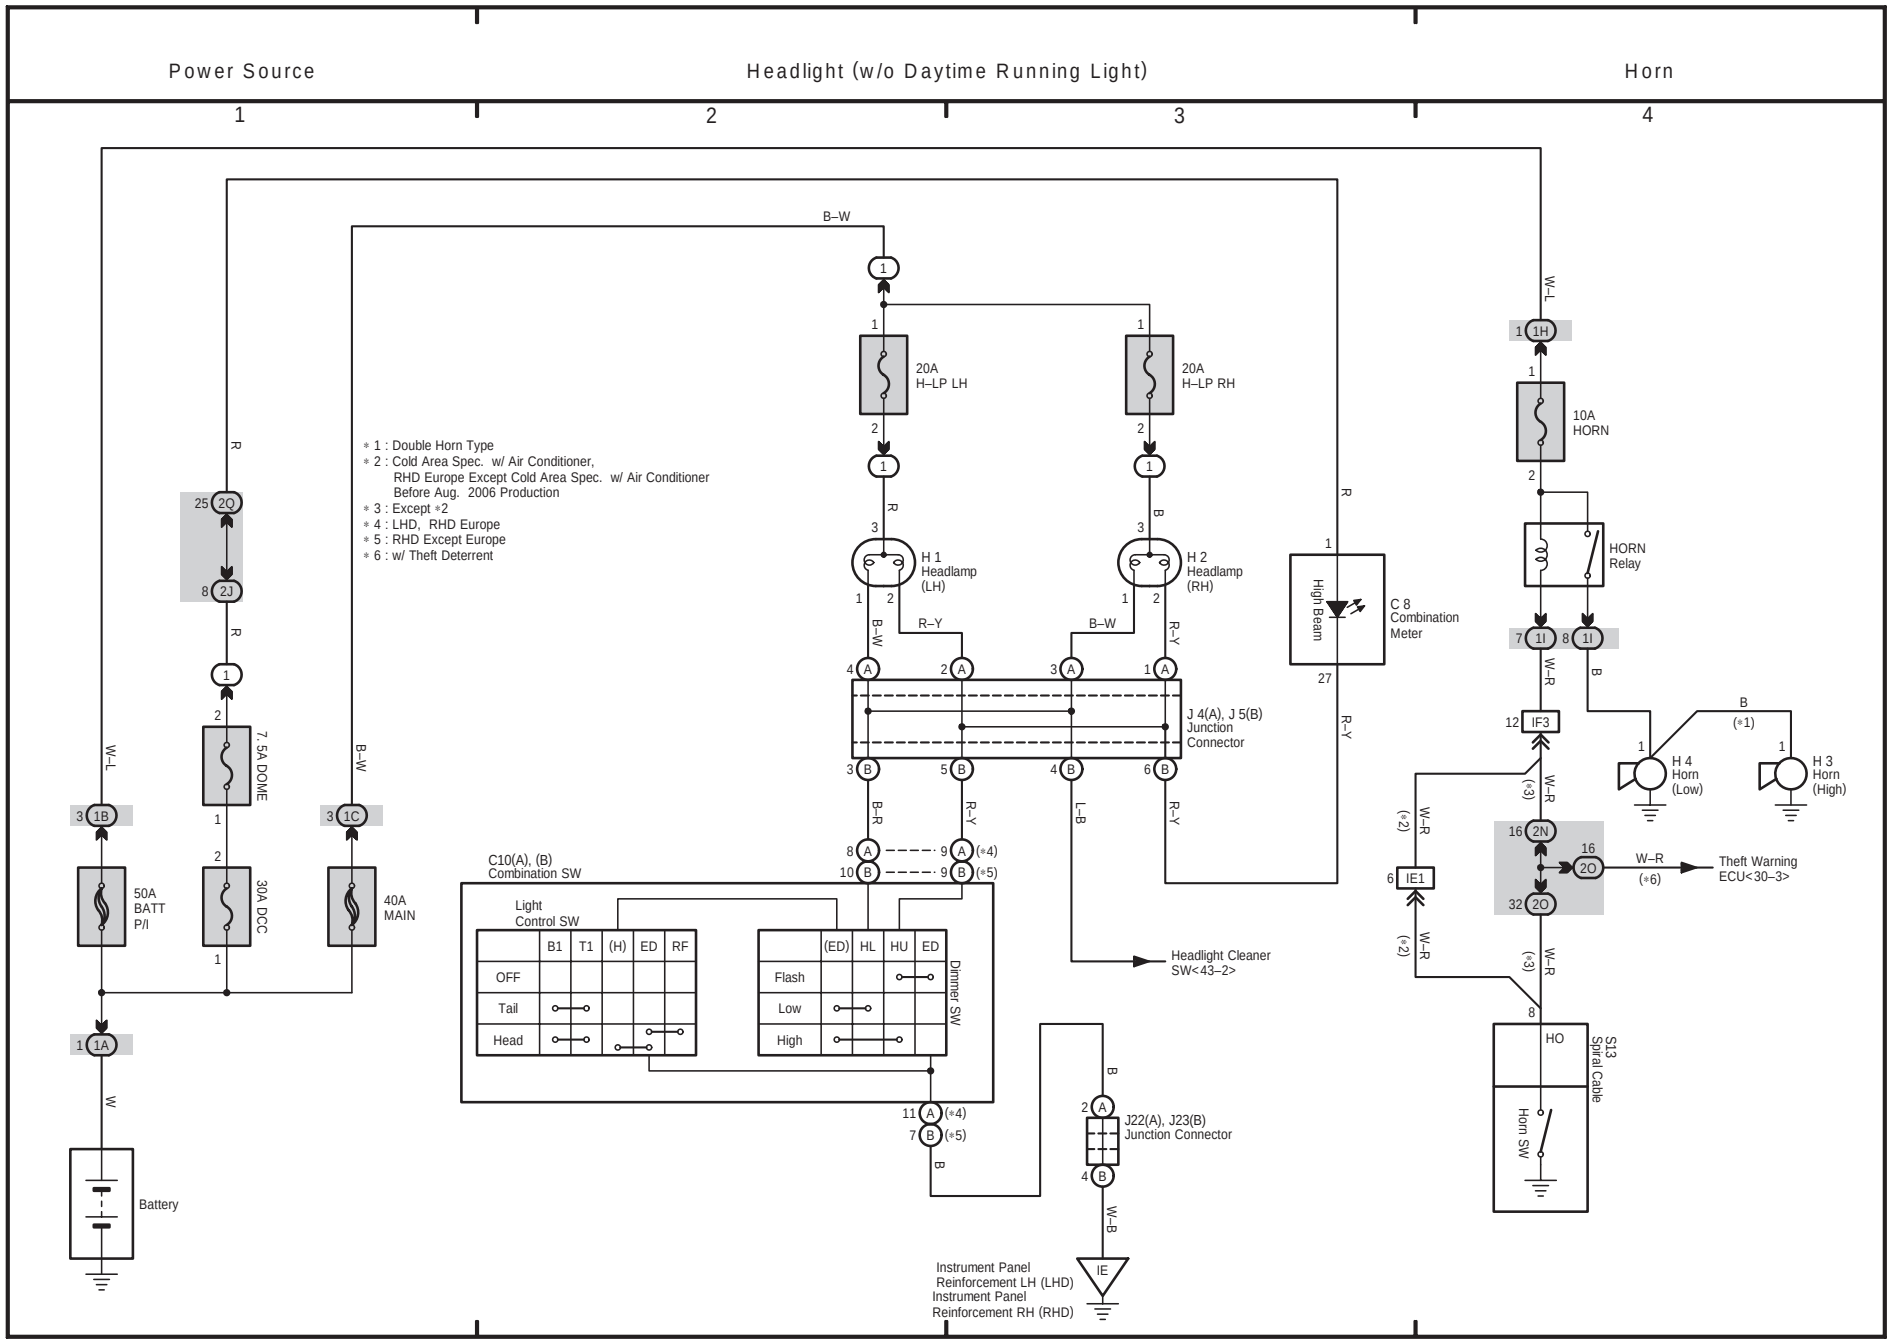

Power Source
Headlight (w/o Daytime Running Light)
Horn
1
2
3
4
＊1 : Double Horn Type
＊2 : Cold Area Spec. w/ Air Conditioner, RHD Europe Except Cold Area Spec. w/ Air Conditioner Before Aug. 2006 Production
＊3 : Except ＊2
＊4 : LHD, RHD Europe
＊5 : RHD Except Europe
＊6 : w/ Theft Deterrent
50A BATT P/I
7.5A DOME
30A DCC
40A MAIN
Battery
20A H–LP LH
20A H–LP RH
H 1 Headlamp (LH)
H 2 Headlamp (RH)
J 4(A), J 5(B) Junction Connector
C10(A), (B) Combination SW
Light Control SW
Dimmer SW
Headlight Cleaner SW<43–2>
J22(A), J23(B) Junction Connector
Instrument Panel Reinforcement LH (LHD)
Instrument Panel Reinforcement RH (RHD)
C 8 Combination Meter
High Beam
10A HORN
HORN Relay
H 4 Horn (Low)
H 3 Horn (High)
Theft Warning ECU<30–3>
S13 Spiral Cable
Horn SW