

■AXLE

- The unit-type double-row tapered roller bearing is used for front and rear axles.
- On the models with brake control system, the speed sensor rotor is integrated in the bearing inner race of both the front and rear axles.

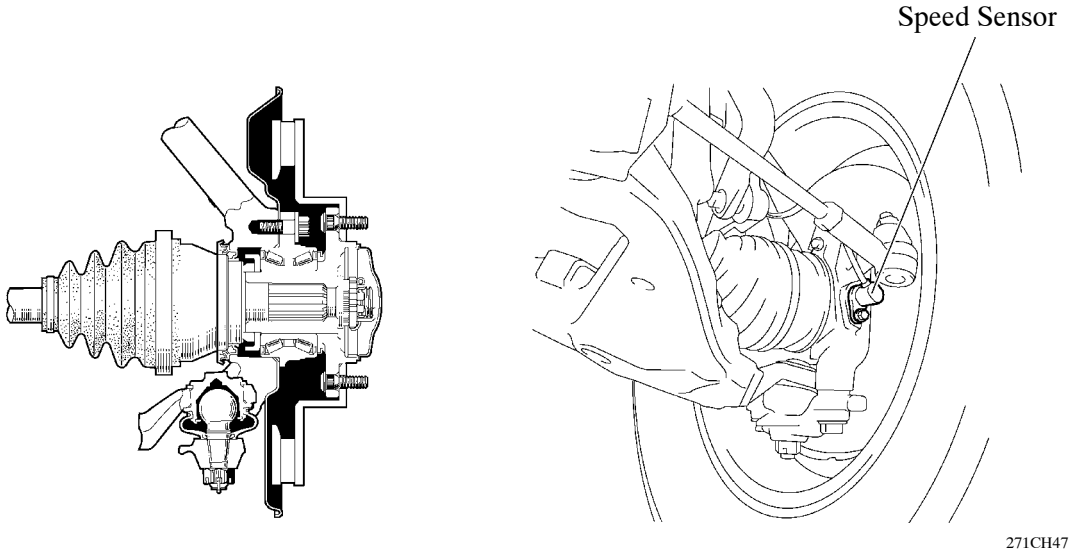

Front Axle

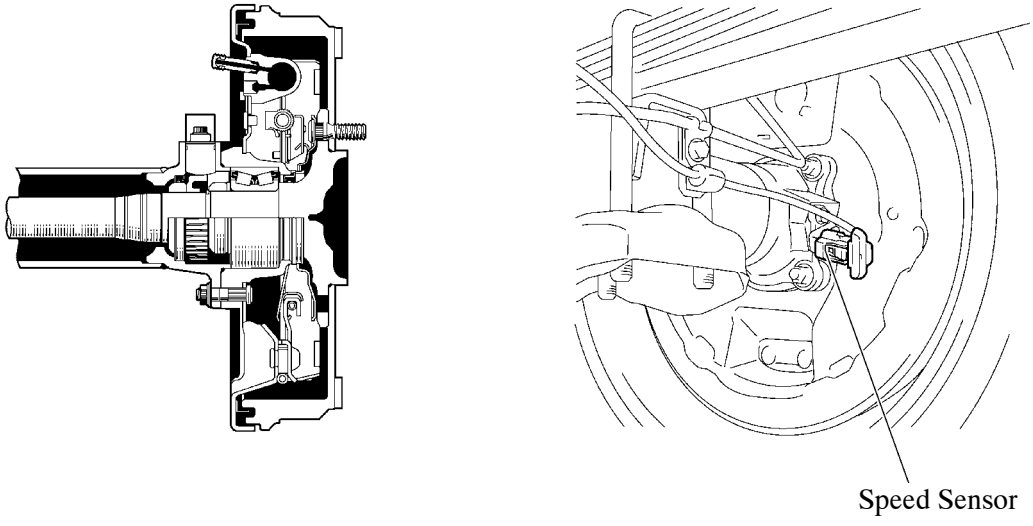

Rear Axle