


▶ **Speaker Location** ◀

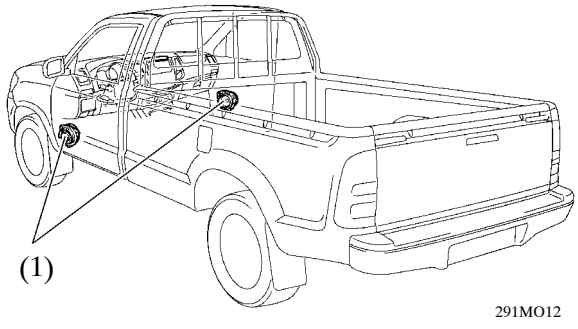


Single Cab

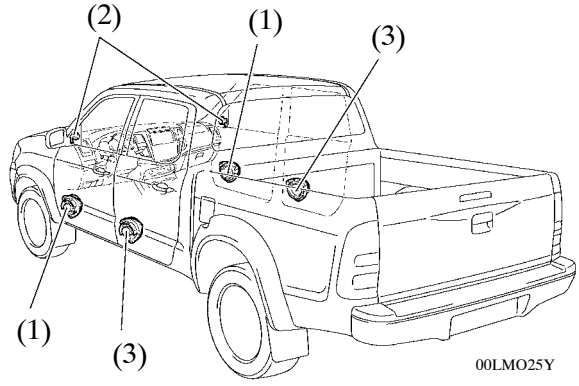

Double Cab

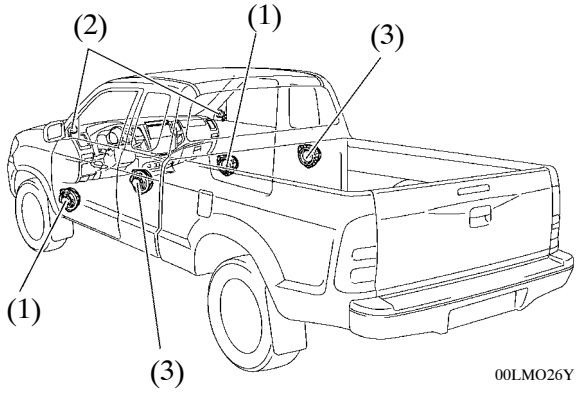

Extra Cab

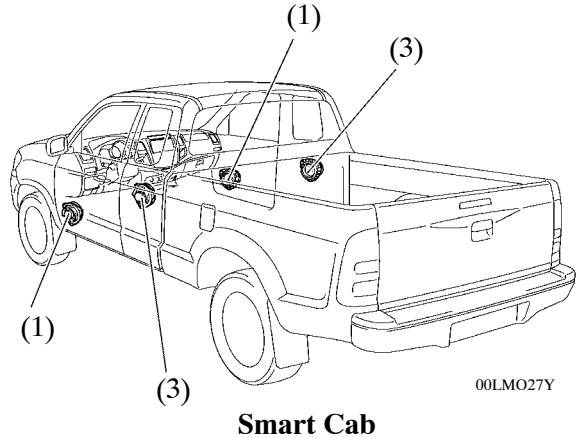

Smart Cab

▶ **Speaker Specifications** ◀

Location	Type	Caliber	Impedance	Input Rated (Max)
(1)	Front Speaker	16 cm (6.3 in.)	4 Ω	17.5 W (30 W)*1
				20 W (50 W)*2
(2)	Tweeter	2.5 cm (1.0 in.)	4 Ω	20 W (50 W)
(3)	Rear Speaker	16 cm (6.3 in.)	4 Ω	17.5 W (30 W)*1
				20 W (50 W)*2

*1: TMT made

*2: TDV or ASSB made

Blocking System

On models for Brazil, the blocking system is used to prevent vehicle theft by blocking engine ignition, and to localize stolen vehicles using GPS.