
BODY PANEL SEALING AREAS

HINT:
1) Prior to applying body sealer, clean the area with a rag soaked in silicone remover.
2) If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.
3) Wipe off excess body sealer with a rag soaked in silicone remover.
4) If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.


++++++++++	Flat Finishing	————	No Flat Finishing


1. ENGINE COMPARTMENT

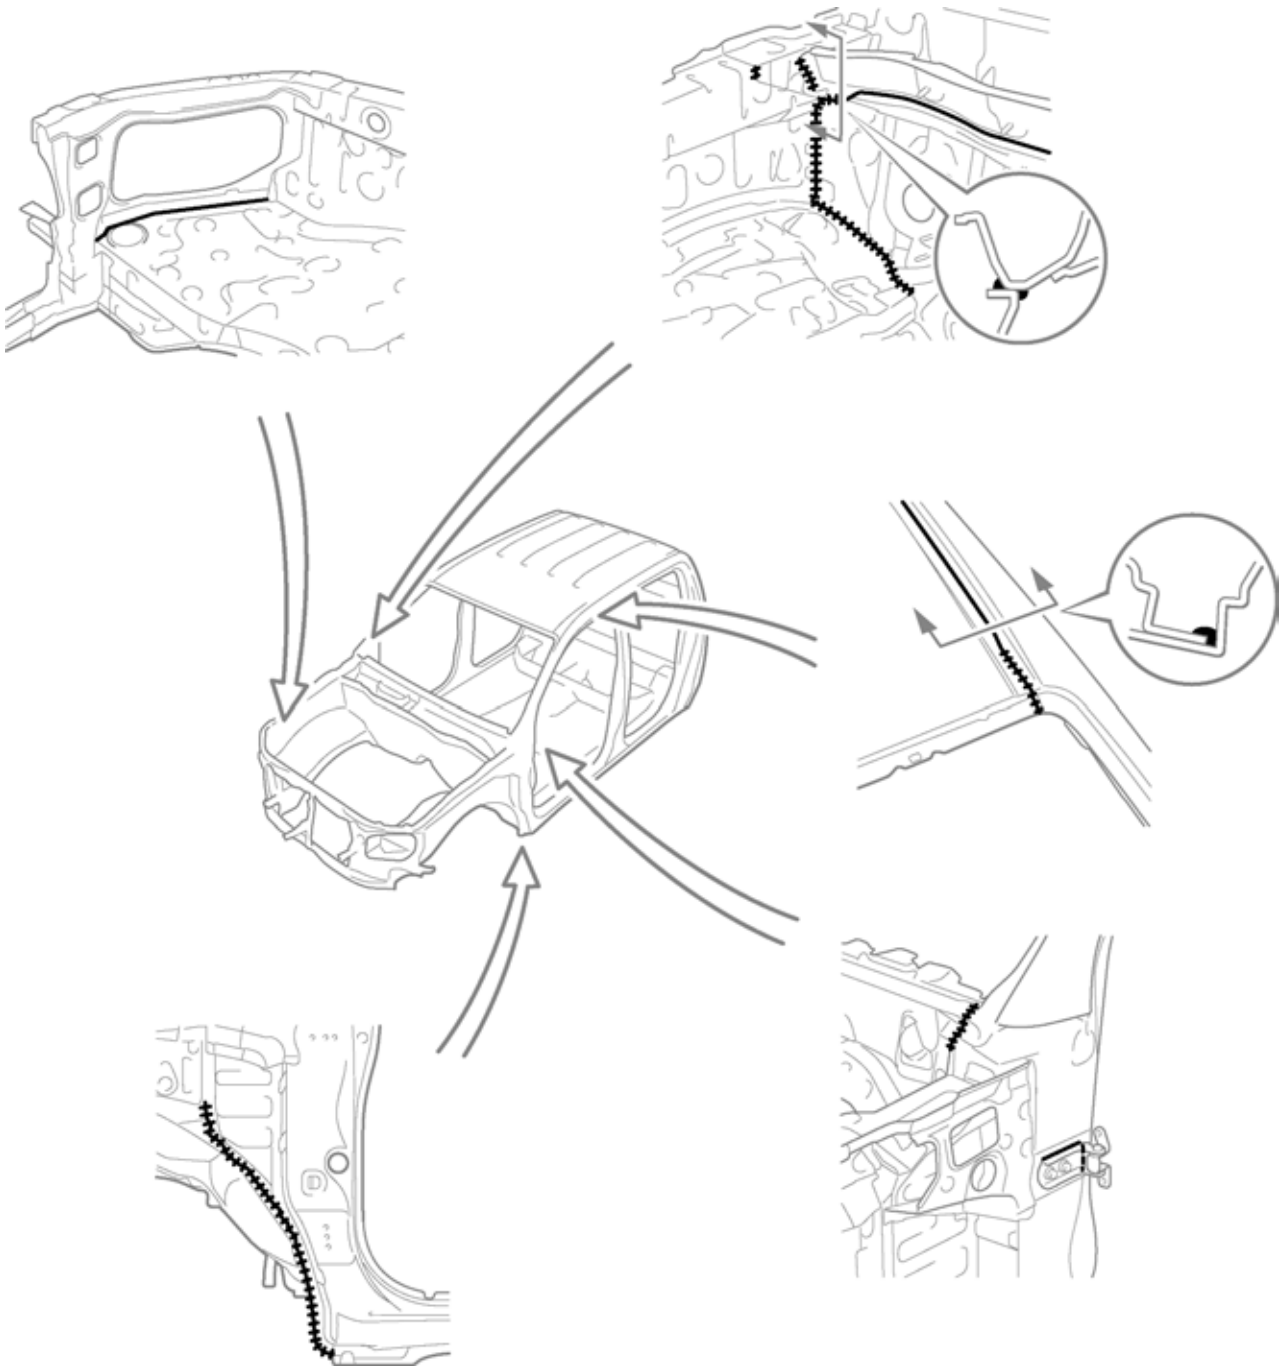


F23951


2. INSIDE

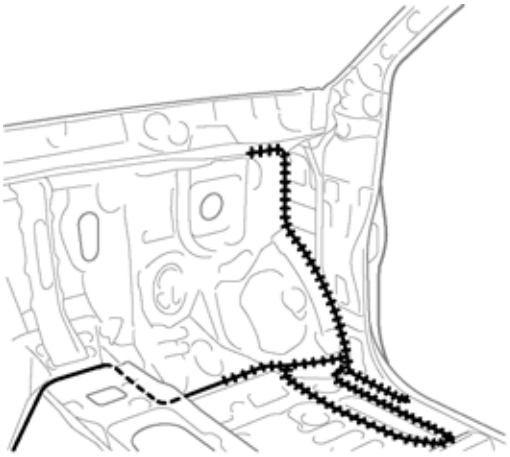

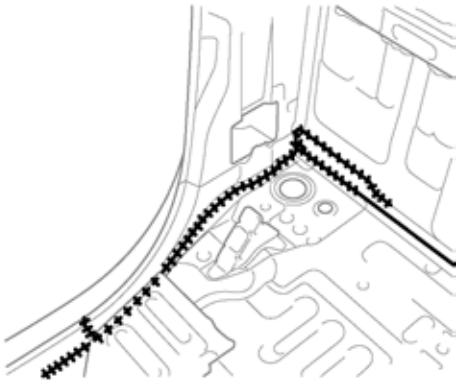


Ex. Regular Cab

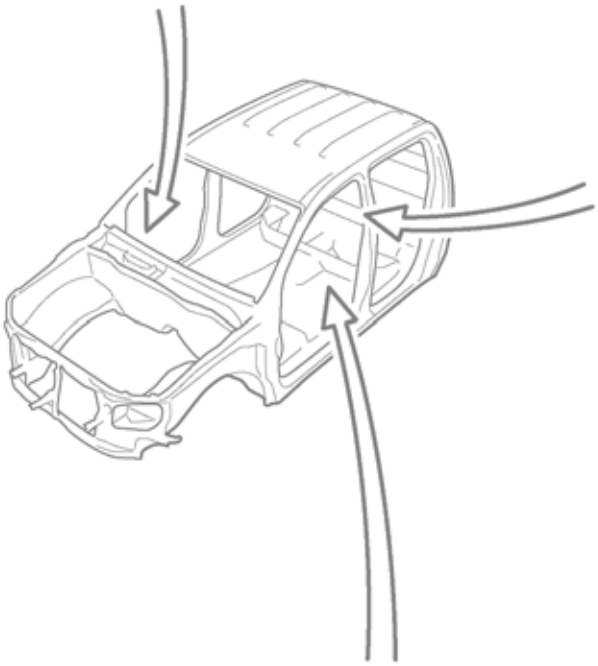

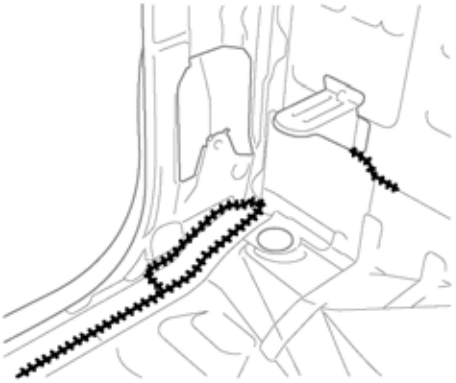



Regular Cab

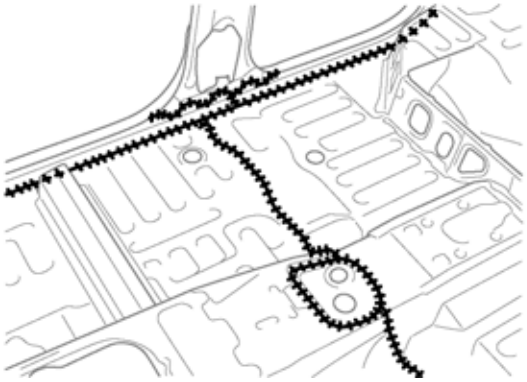



F23952

3. OUTSIDE

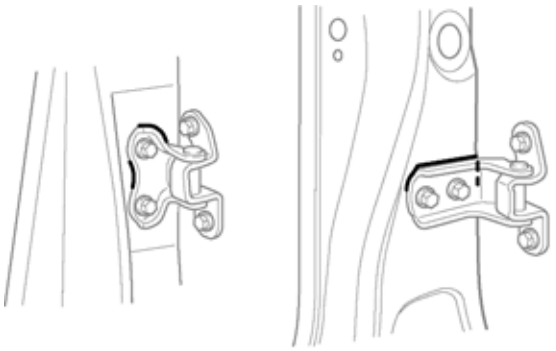


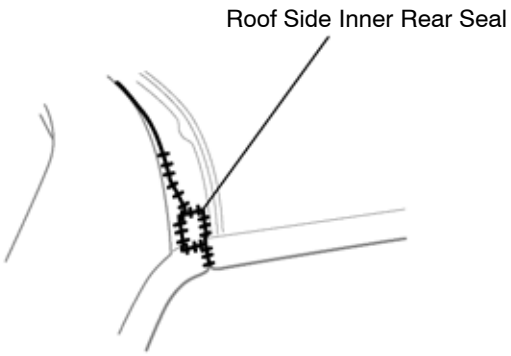

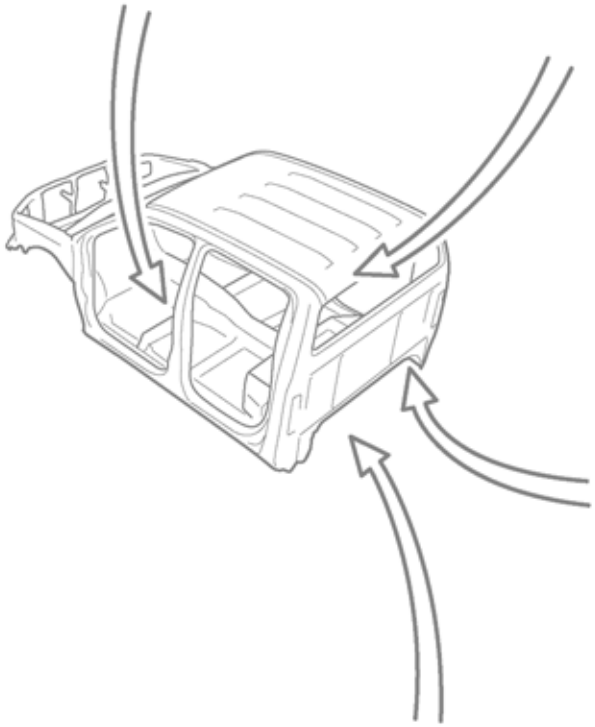


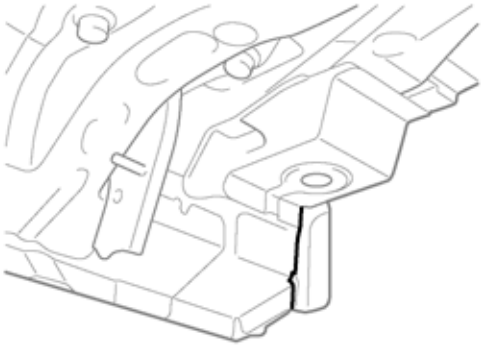

Regular Cab Only

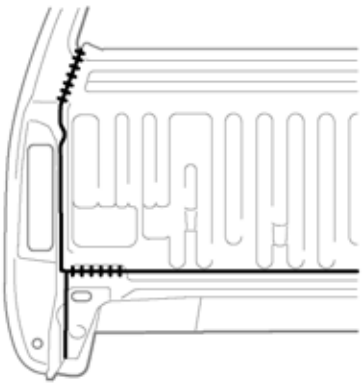


Ex. Regular Cab

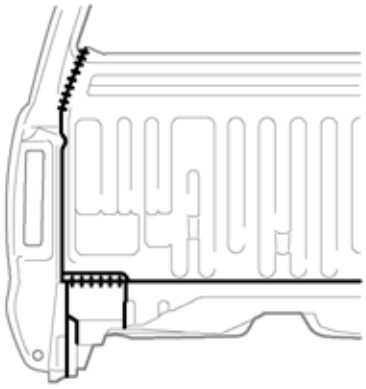


Regular Cab


F23953

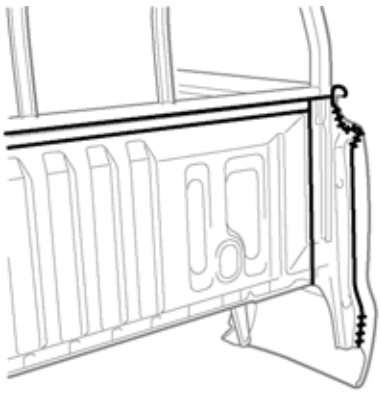

w/ Rope Hook

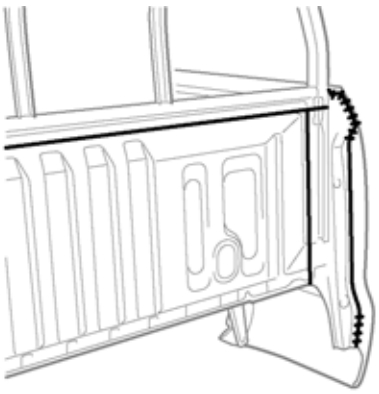


w/o Rope Hook

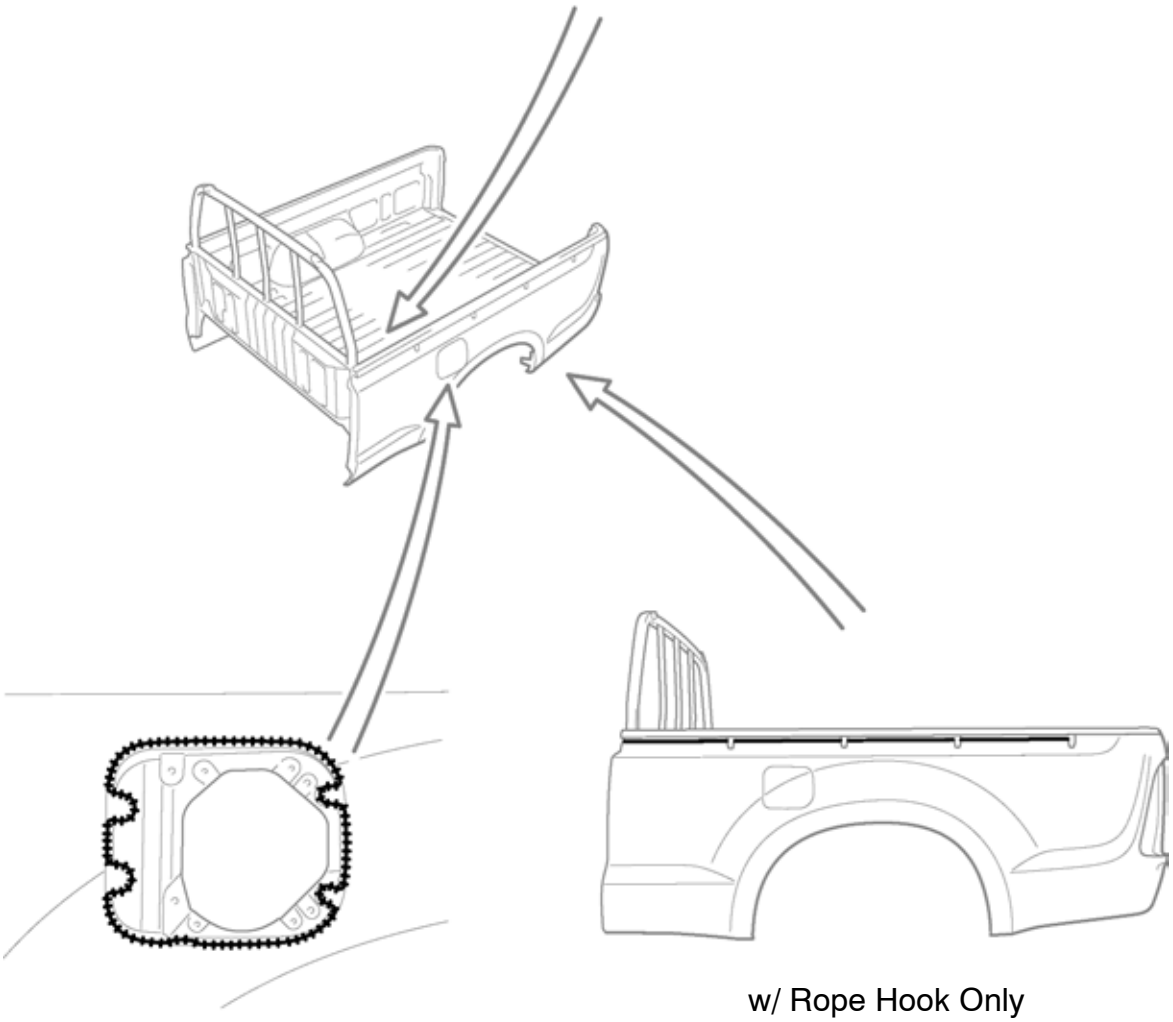



w/ Rope Hook Only


F23954

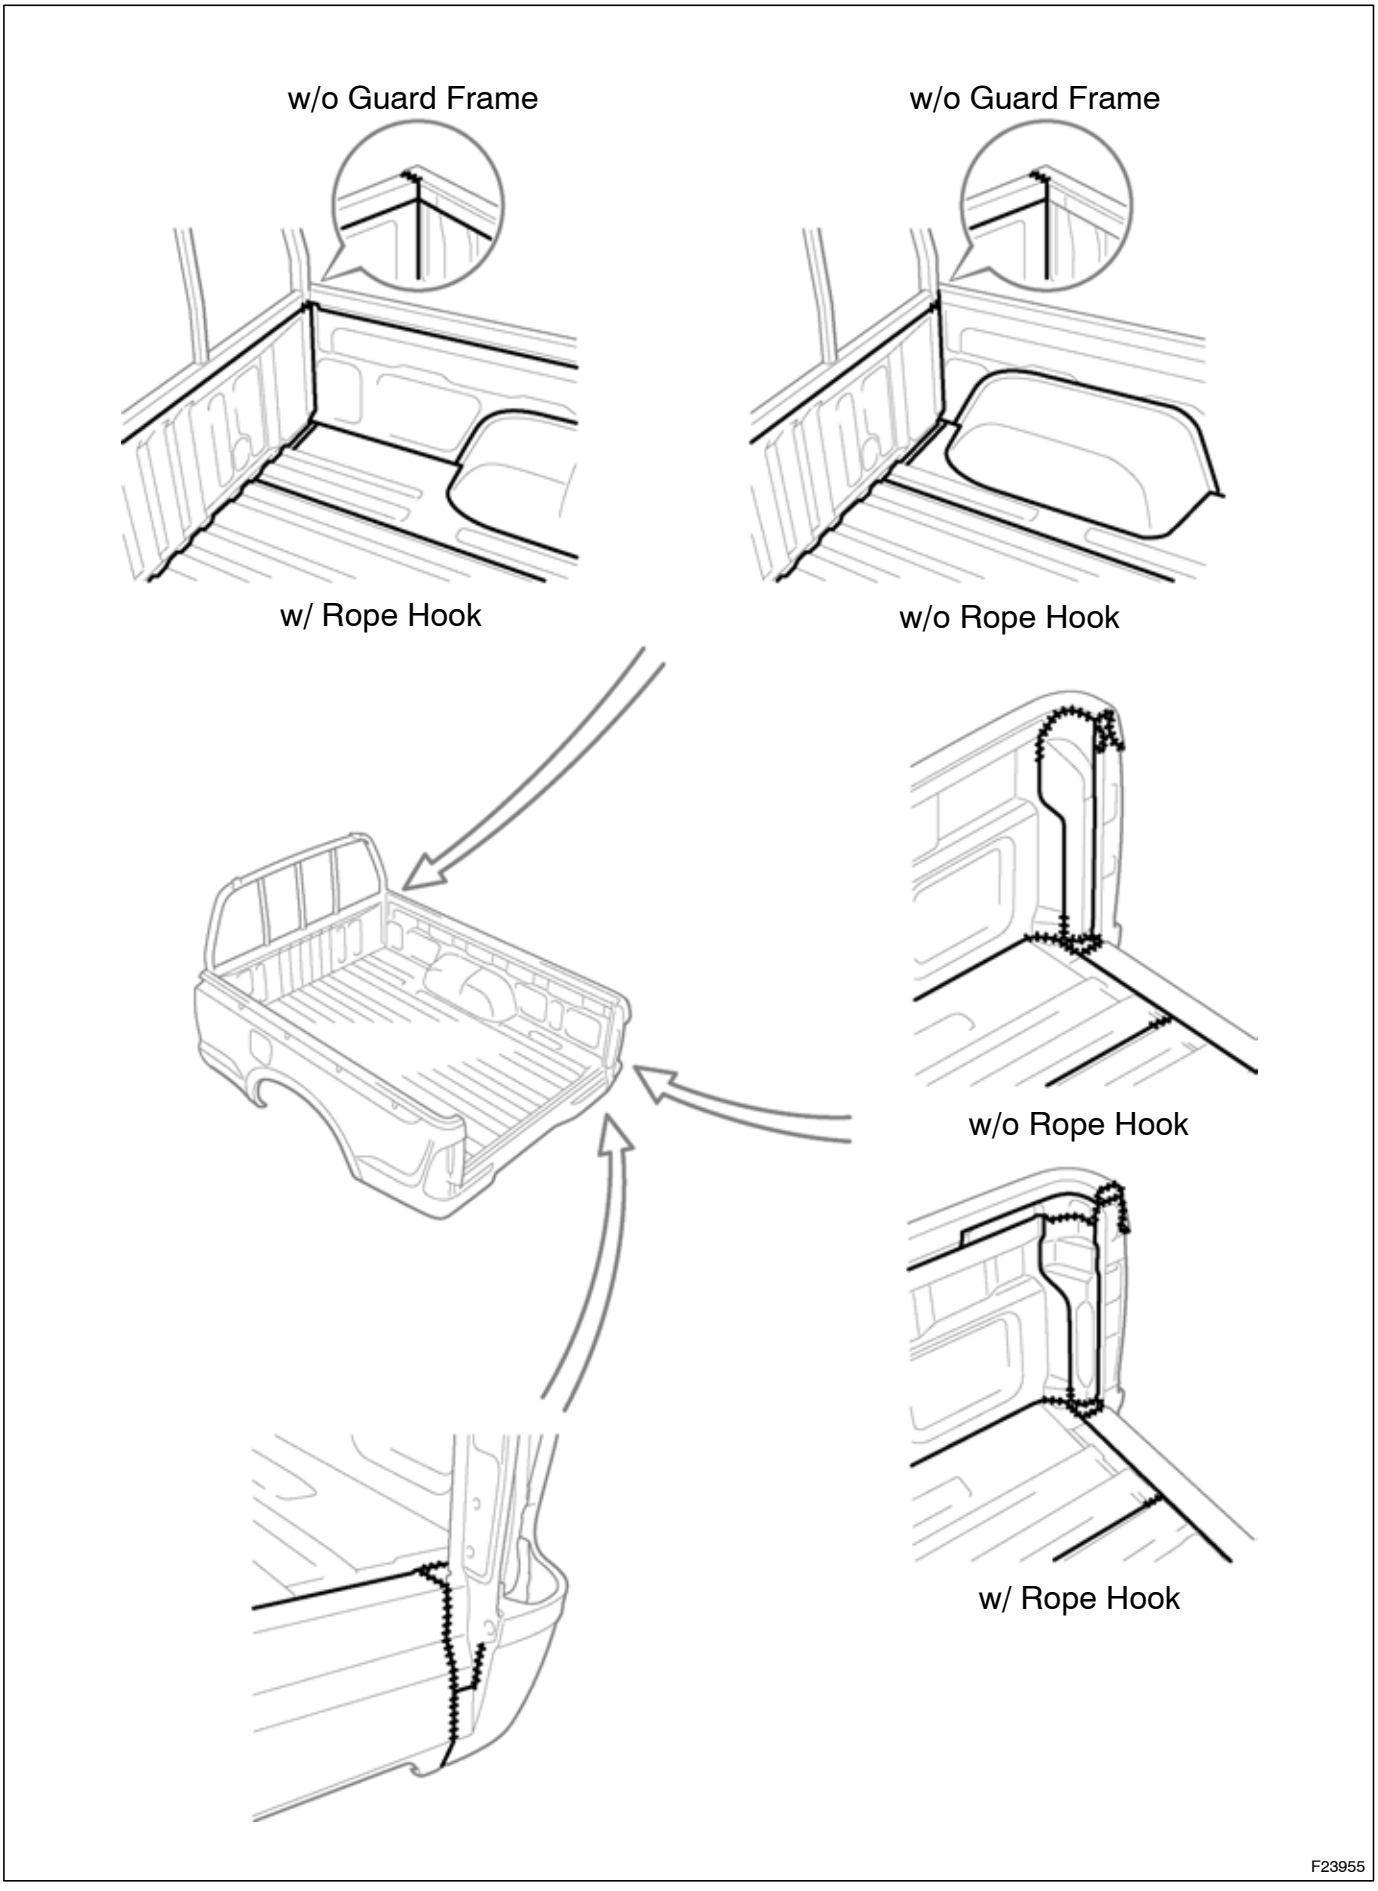
w/o Guard Frame
w/o Guard Frame
w/ Rope Hook
w/o Rope Hook
w/o Rope Hook
w/ Rope Hook
F23955


4. DOOR PARTS

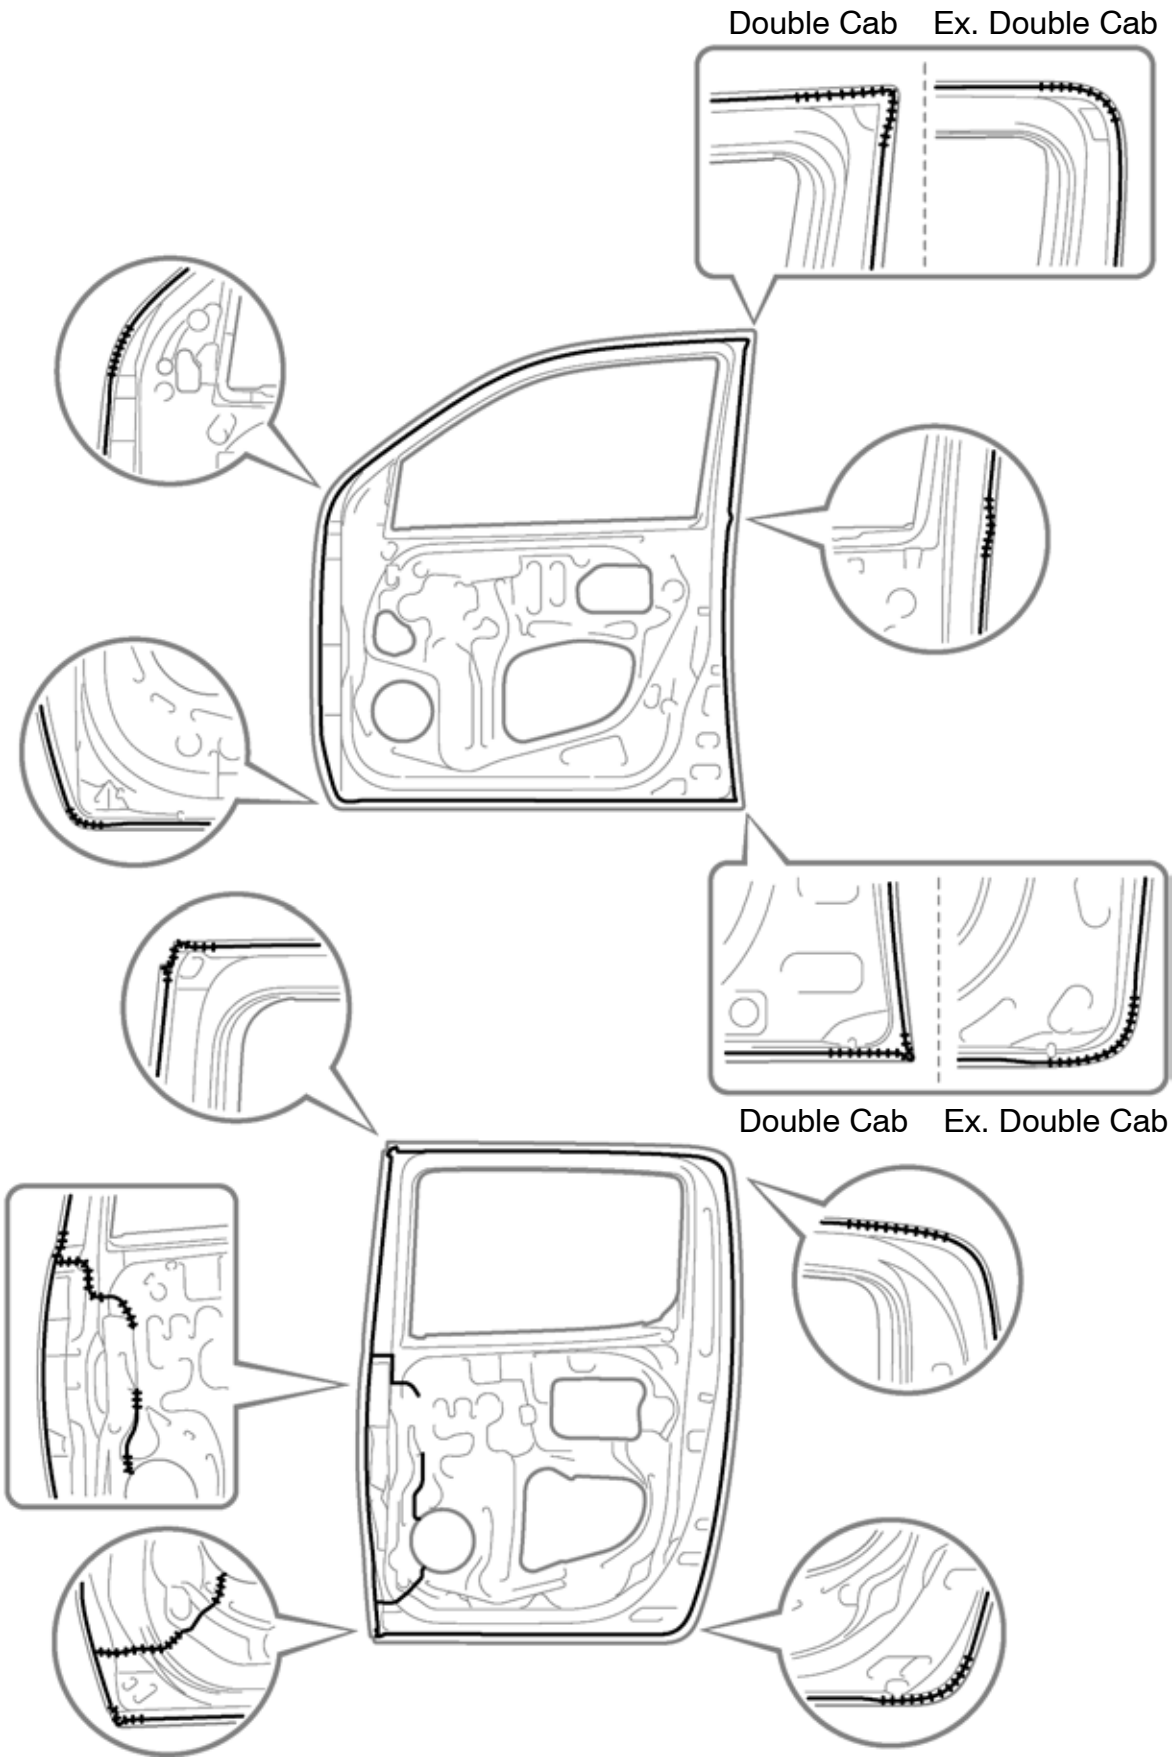

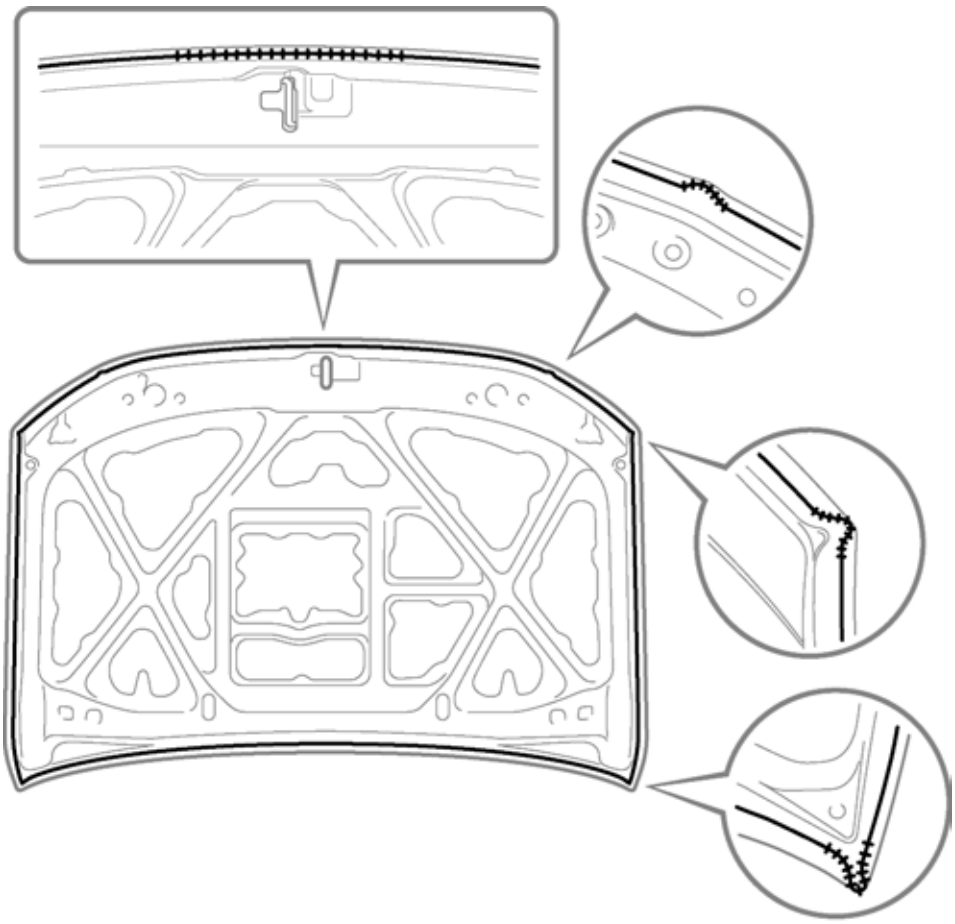

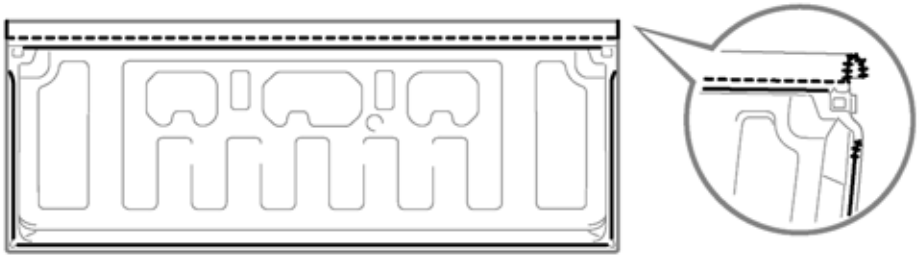

w/ Rope Hook

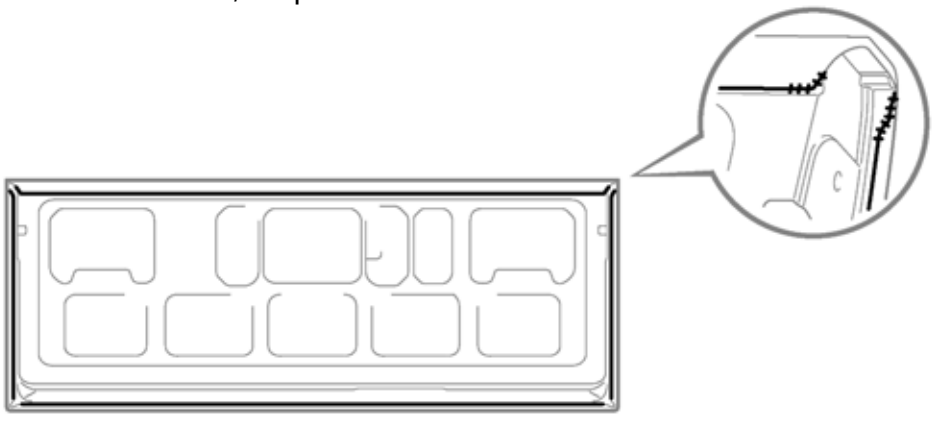

w/o Rope Hook

F23957