


BODY PANEL ANTI-CHIPPING PAINT APPLICATION AREAS


HINT:
1) Anti-chipping paint should be applied to some areas before the second coat and to others after the top coat.
2) If other areas are accidentally coated, wipe off the paint immediately with a rag soaked in silicone remover.

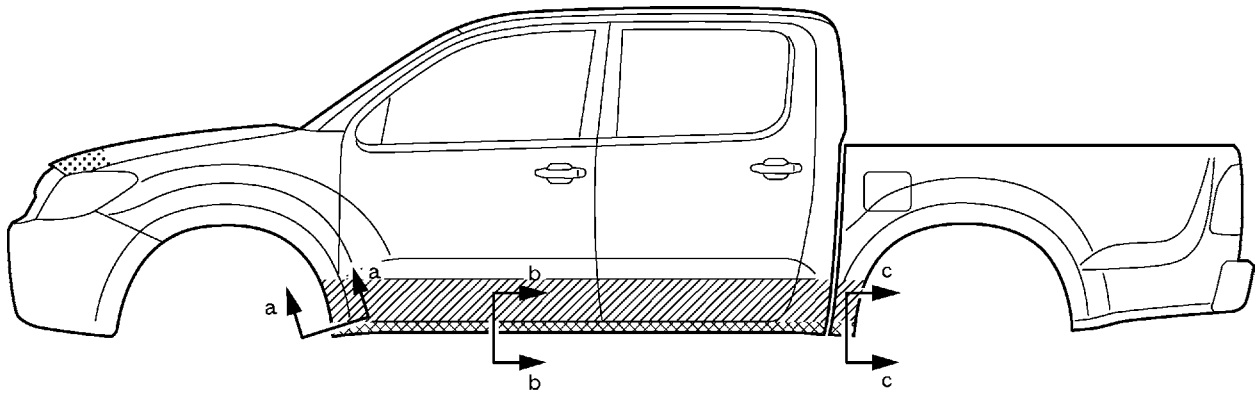

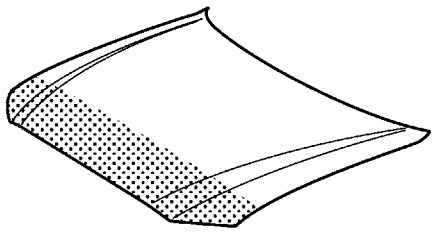




a – a



b – b



c – c

F23966

	PVC		SOFT CHIP PRIMER*1		URETHANE or PVC*2

REFERENCE
*1, 2: Only for Europe models