
BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

HINT:
1) *Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.*
2) *Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.*
3) *Wipe off the anti-rust agent immediately with a rag soaked in silicone remover, if accidently applied to other areas.*





a – a

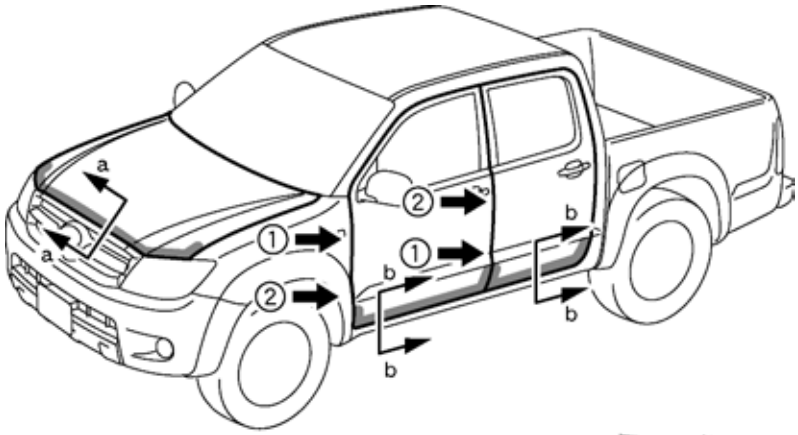

b – b





①



②

F23963

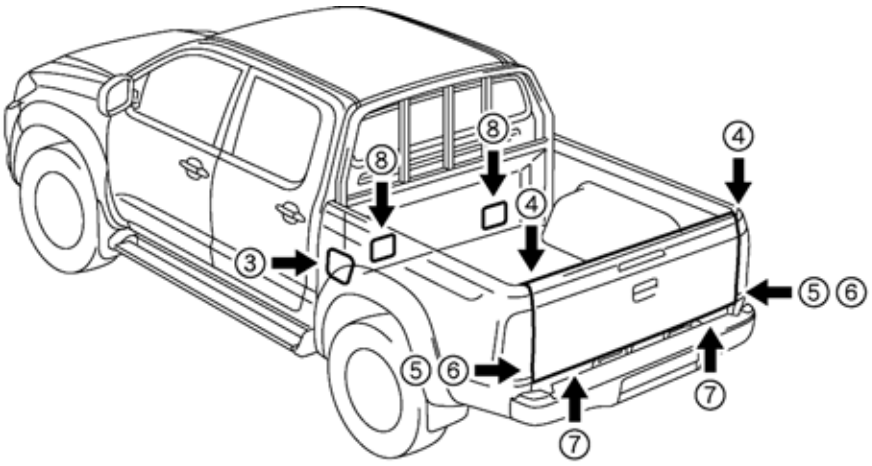




③




④



⑤



⑥

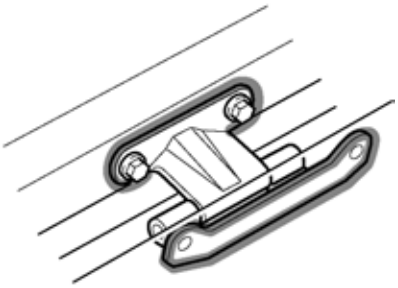

⑦



⑧

F23964