


BODY PANEL SEALING AREAS


HINT:

1. *Prior to applying body sealer, clean the area with a rag soaked in a grease, wax and silicone remover.*
2. *If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.*
3. *Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.*
4. *If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.*

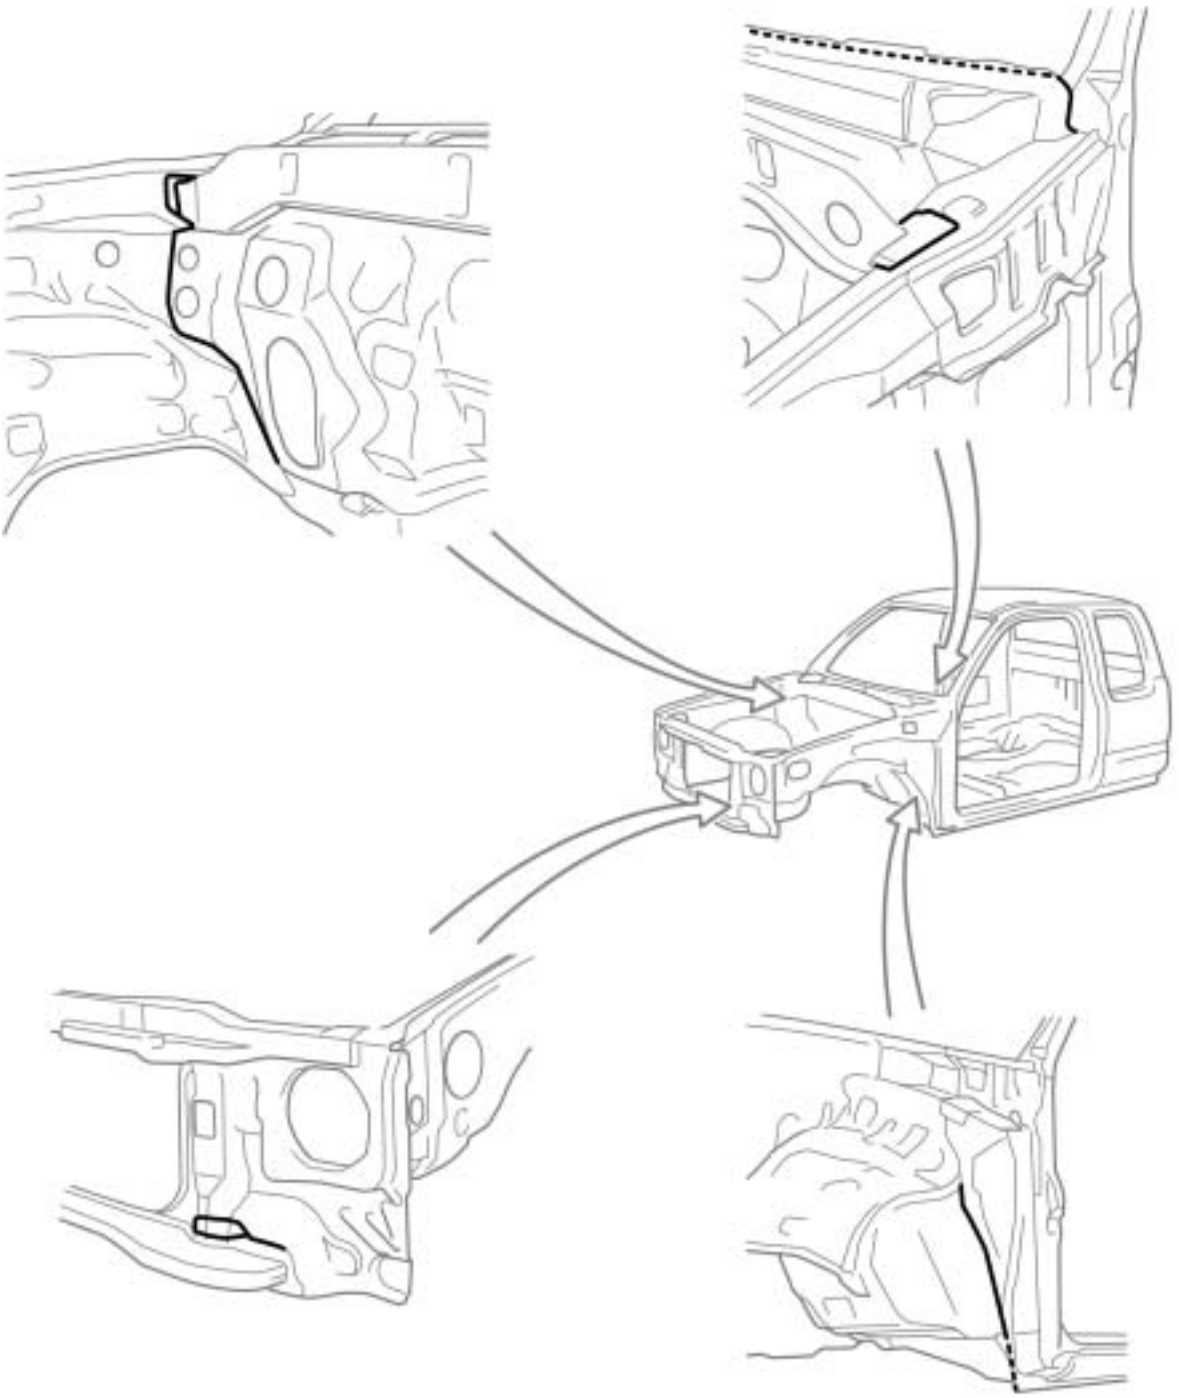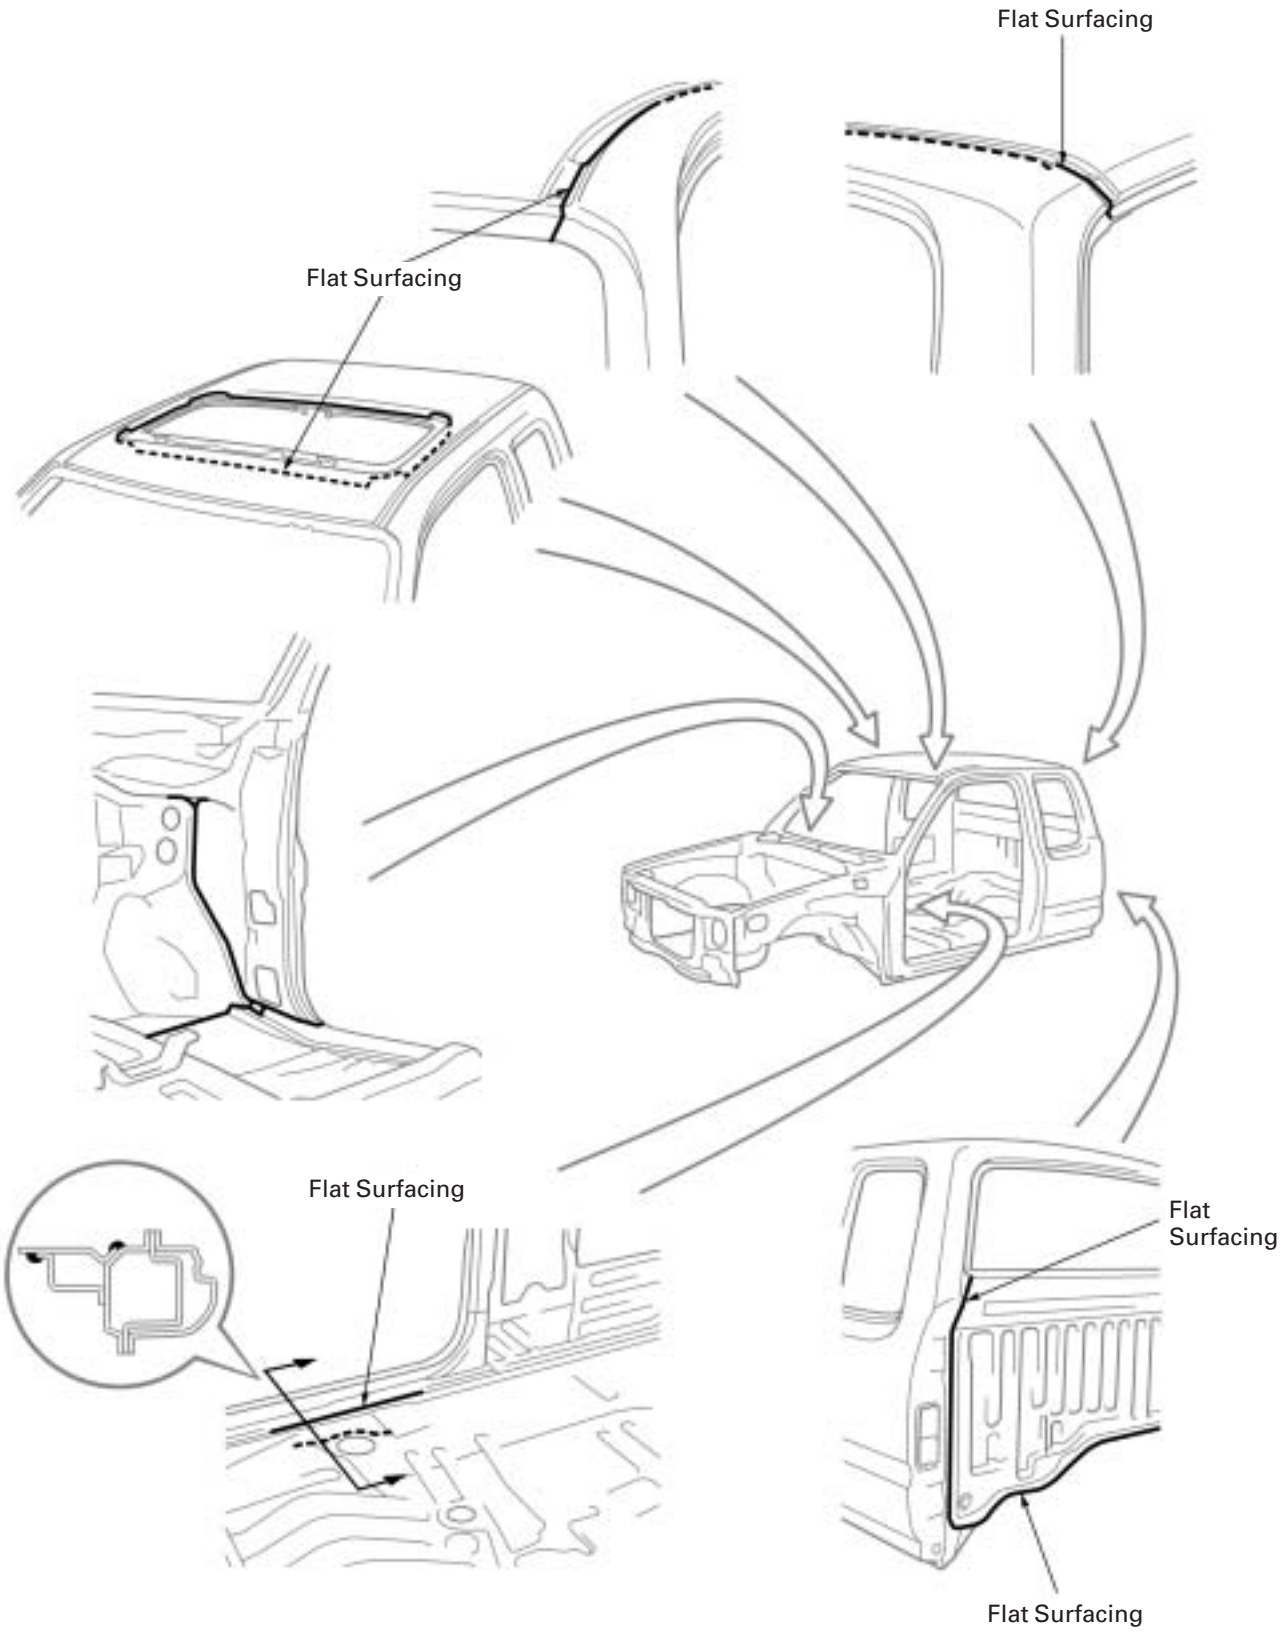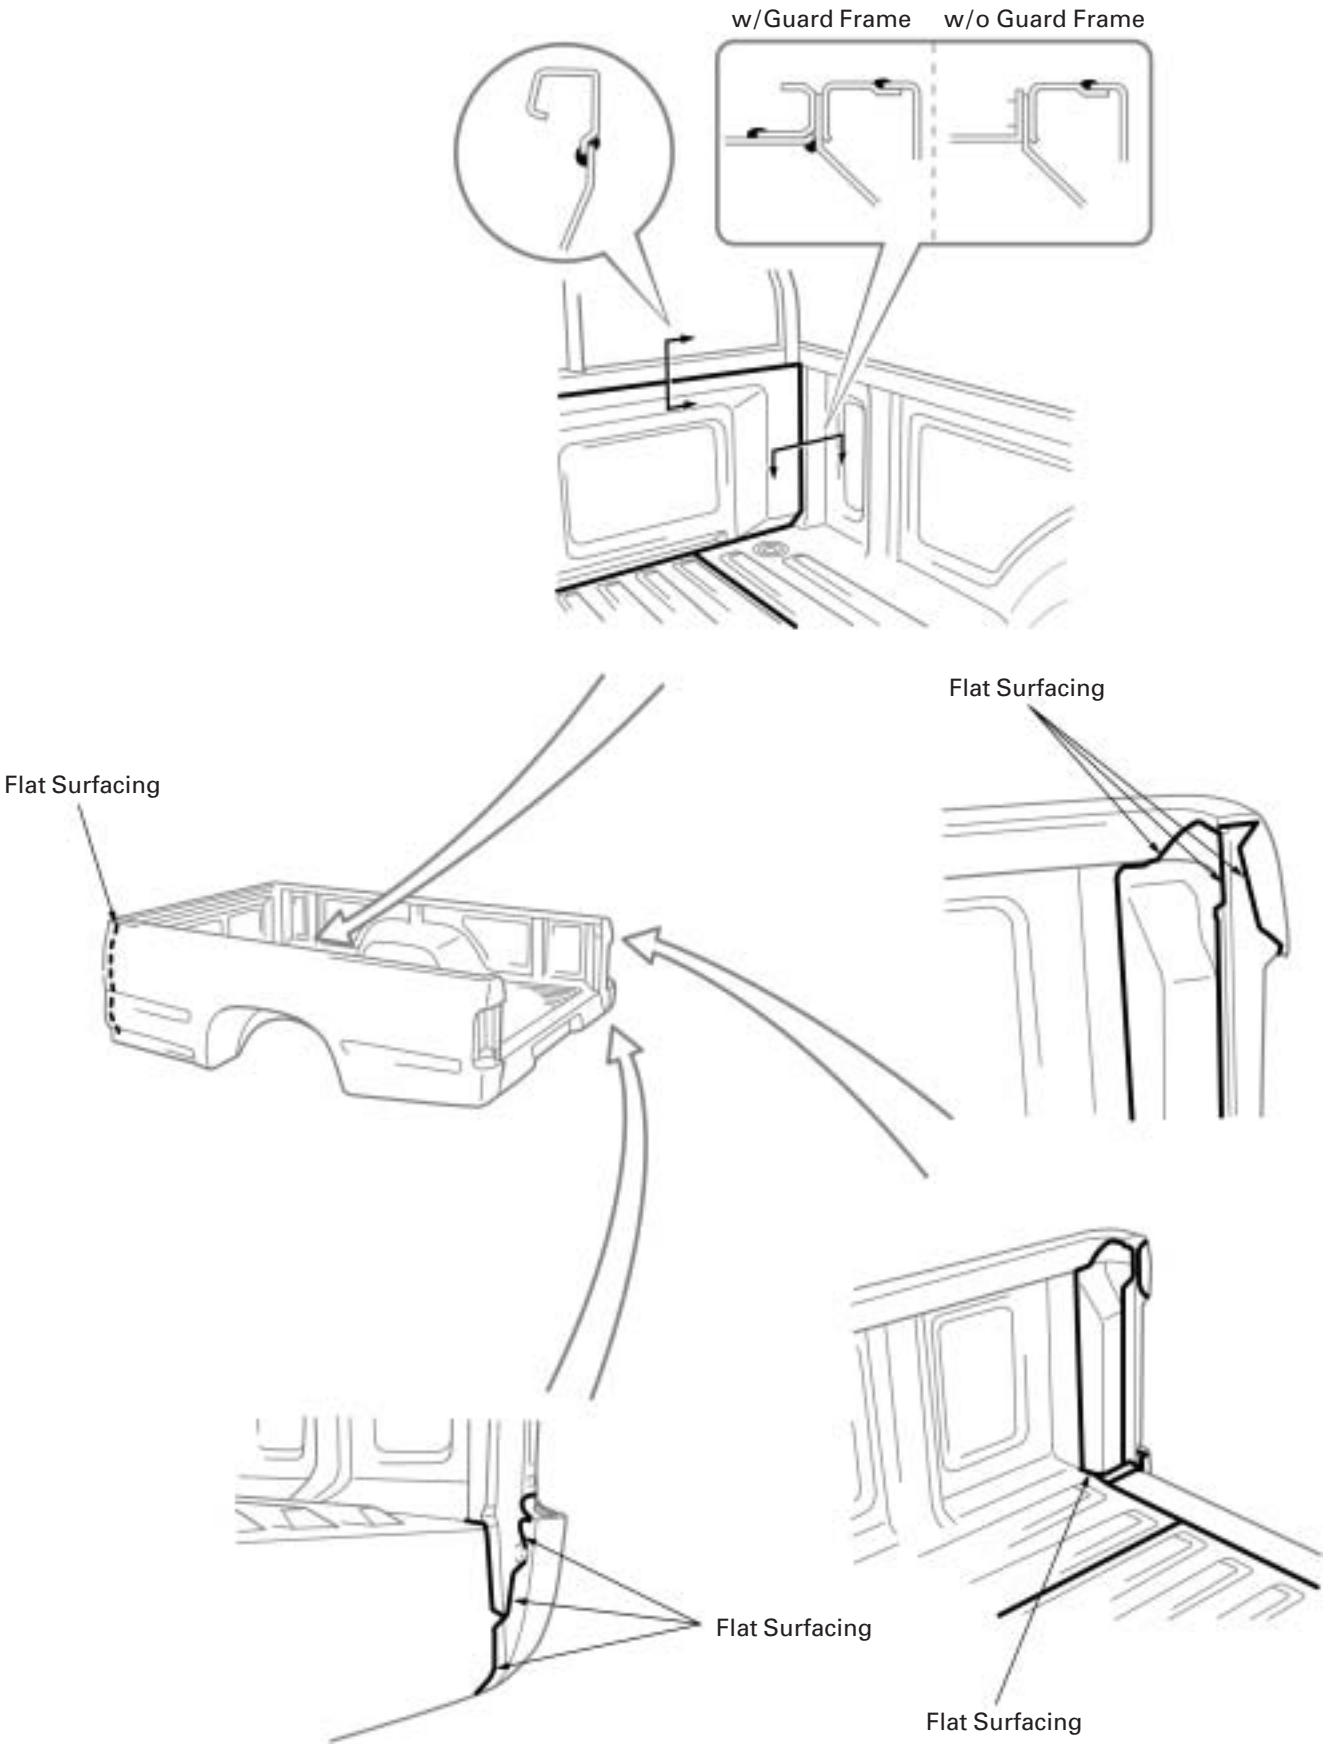


Flat Surfacing
Flat Surfacing
Flat Surfacing
Flat
Surfacing
Flat Surfacing


w/Guard Frame
w/o Guard Frame
Flat Surfacing
Flat Surfacing
Flat Surfacing
Flat Surfacing

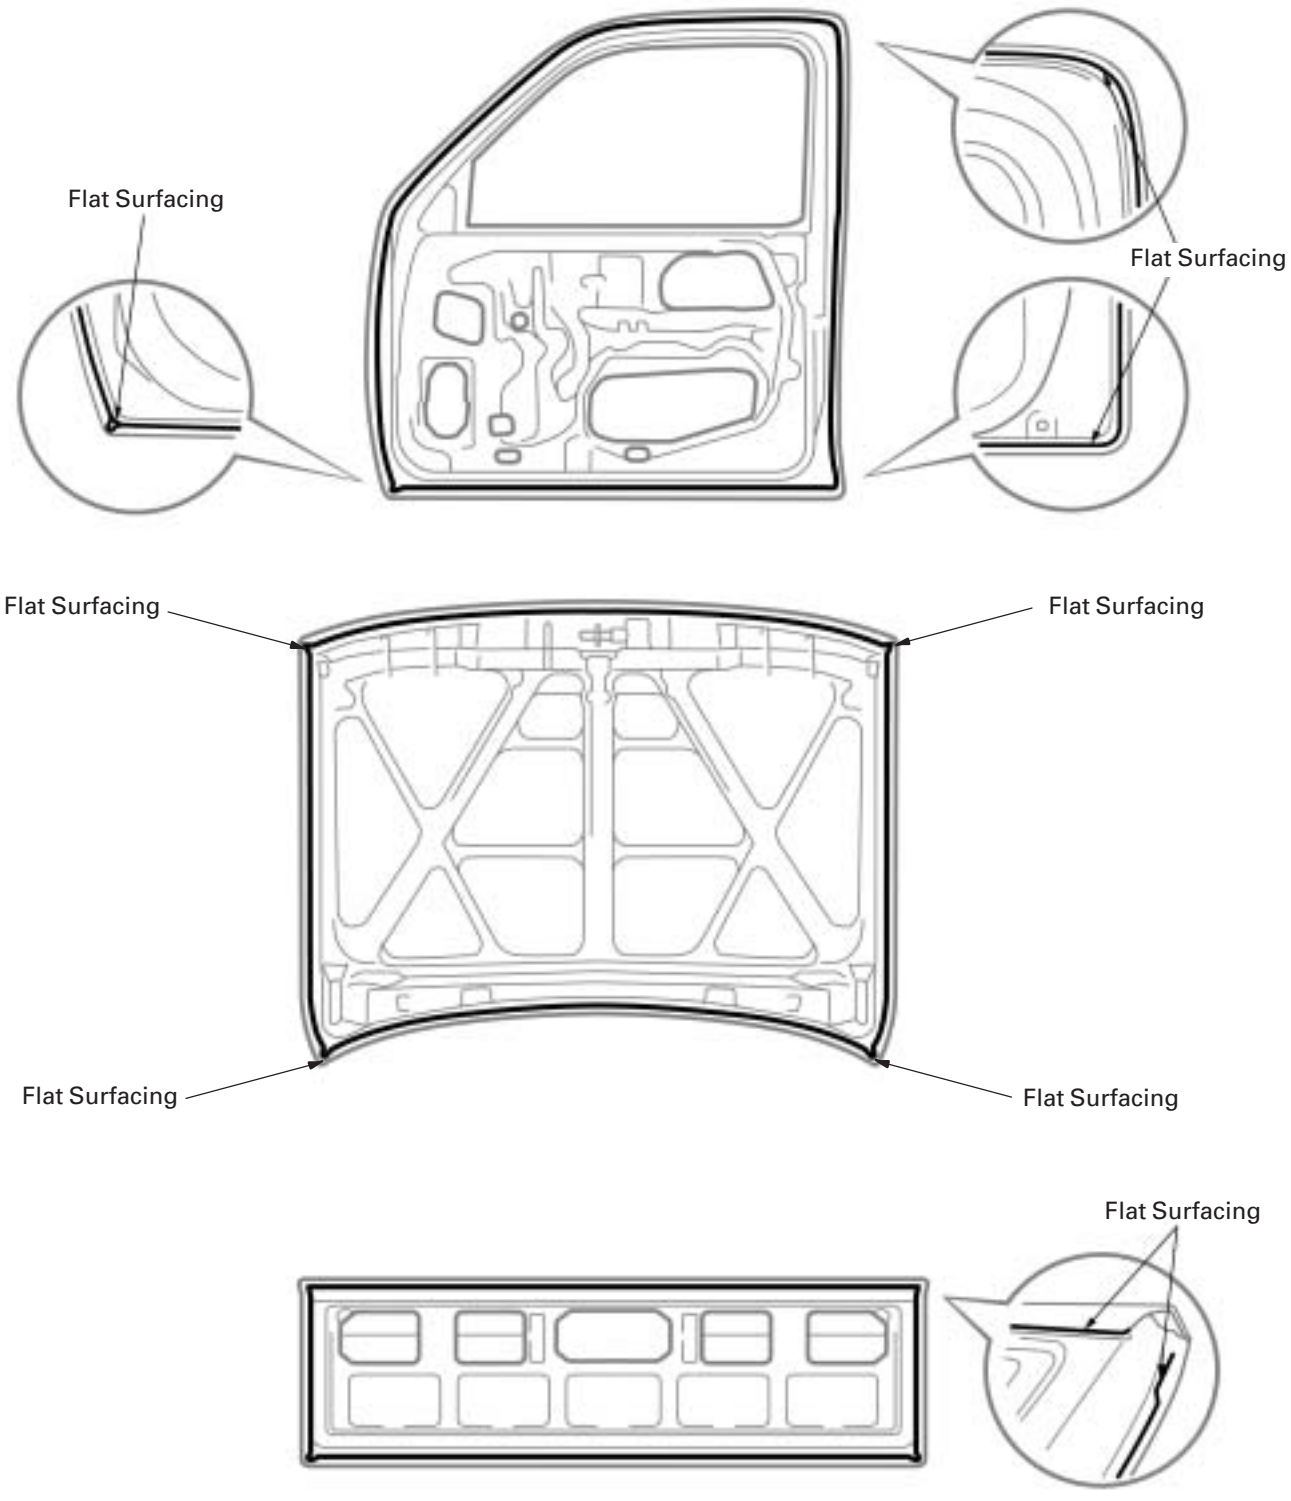
Flat Surfacing
Flat Surfacing
Flat Surfacing
Flat Surfacing
Flat Surfacing
Flat Surfacing
Flat Surfacing