
BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three-Dimensional Distance)

mm (in.)

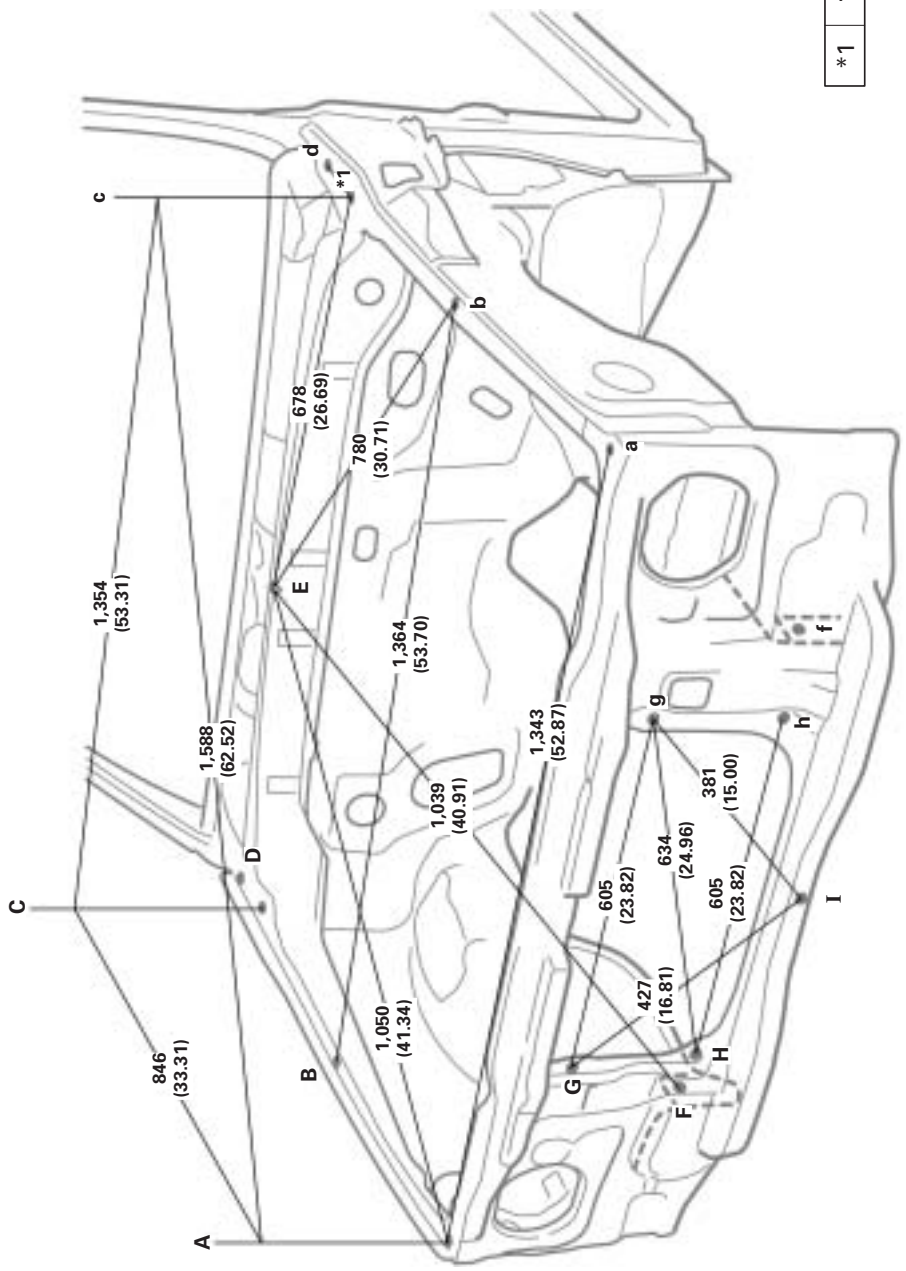

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	F, f	Front fender apron standard hole	13 (0.51)
B, b	Front fender installation nut	6 (0.24) nut	G, g	Radiator installation hole	RH: 13 (0.51) LH: 13 x 8.5 (0.51 x 0.335)
C, c	Front fender installation nut	6 (0.24) nut	H, h	Radiator installation hole	12 (0.47)
D, d	Hood hinge installation nut-rear	8 (0.31) nut	I	Hood lock support installation nut	6 (0.24) nut
E	Cowl top panel vehicle center mark	—	—	—	—

BODY OPENING AREAS
REGULAR CAB

(Three-Dimensional Distance)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

E-f or e-F	E-h or e-H	E-i or e-I	F-i or f-I	F-j or f-J	G-h or g-H	G-i or g-I	H-i or h-I	I-j or i-J
1,543 (60.75)	1,638 (64.49)	1,415 (55.71)	1,812 (71.34)	1,711 (67.36)	1,488 (58.58)	1,798 (70.79)	1,623 (63.90)	1,518 (59.76)

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j
1,249 (49.17)	1,384 (54.49)	1,386 (54.57)	1,386 (54.57)	1,249 (49.17)	1,390 (54.72)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	F, f	Front body pillar assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	G, g	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	H, h	Rocker panel assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	I, i	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	J, j	Quarter panel assembly mark	—

BODY OPENING AREAS (Side View – Front)
DOUBLE CAB

(Three-Dimensional Distance)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j
1,244 (48.98)	1,388 (54.65)	1,386 (54.57)	1,386 (54.57)	1,247 (49.09)	1,389 (54.69)

E-f or e-F	E-h or e-H	E-i or e-I	F-i or f-I	F-j or f-J	G-h or g-H	H-i or h-I	I-j or i-J
1,543 (60.75)	1,638 (64.49)	1,405 (55.31)	1,800 (70.87)	1,641 (64.61)	1,488 (58.58)	1,621 (63.82)	1,520 (59.84)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	I, i	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	J, j	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Raer door hinge installation hole	15 (0.59)
F, f	Front body pillar assembly mark	—	L, l	Raer door hinge installation hole	15 (0.59)

BODY OPENING AREAS (Side View – Rear)
DOUBLE CAB

(Three-Dimensional Distance)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

G-p or g-P	H-p or h-P	M-q or m-Q	M-p or m-P	M-r or m-R	N-r or n-R	P-q or p-Q	Q-r or q-R
1,925 (75.79)	1,587 (62.48)	1,397 (55.00)	1,654 (65.12)	1,634 (64.33)	1,530 (60.24)	1,611 (63.43)	1,518 (59.76)

Vehicle Dimensions Left ↔ Right

M-m	N-n	O-o	P-p	Q-q	R-r
1,248 (49.13)	1,385 (54.53)	1,386 (54.57)	1,386 (54.57)	1,249 (49.17)	1,390 (54.72)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	O, o	Rocker panel assembly mark	—
H, h	Rocker panel assembly mark	—	P, p	Rocker panel assembly mark	—
M, m	Center body pillar assembly mark	—	Q, q	Quarter panel assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—

– MEMO –

FRAME DIMENSION
2WD REGULAR CAB
(Short Wheel Base Models except South Africa)

(Three-Dimensional Distance)

mm (in.)

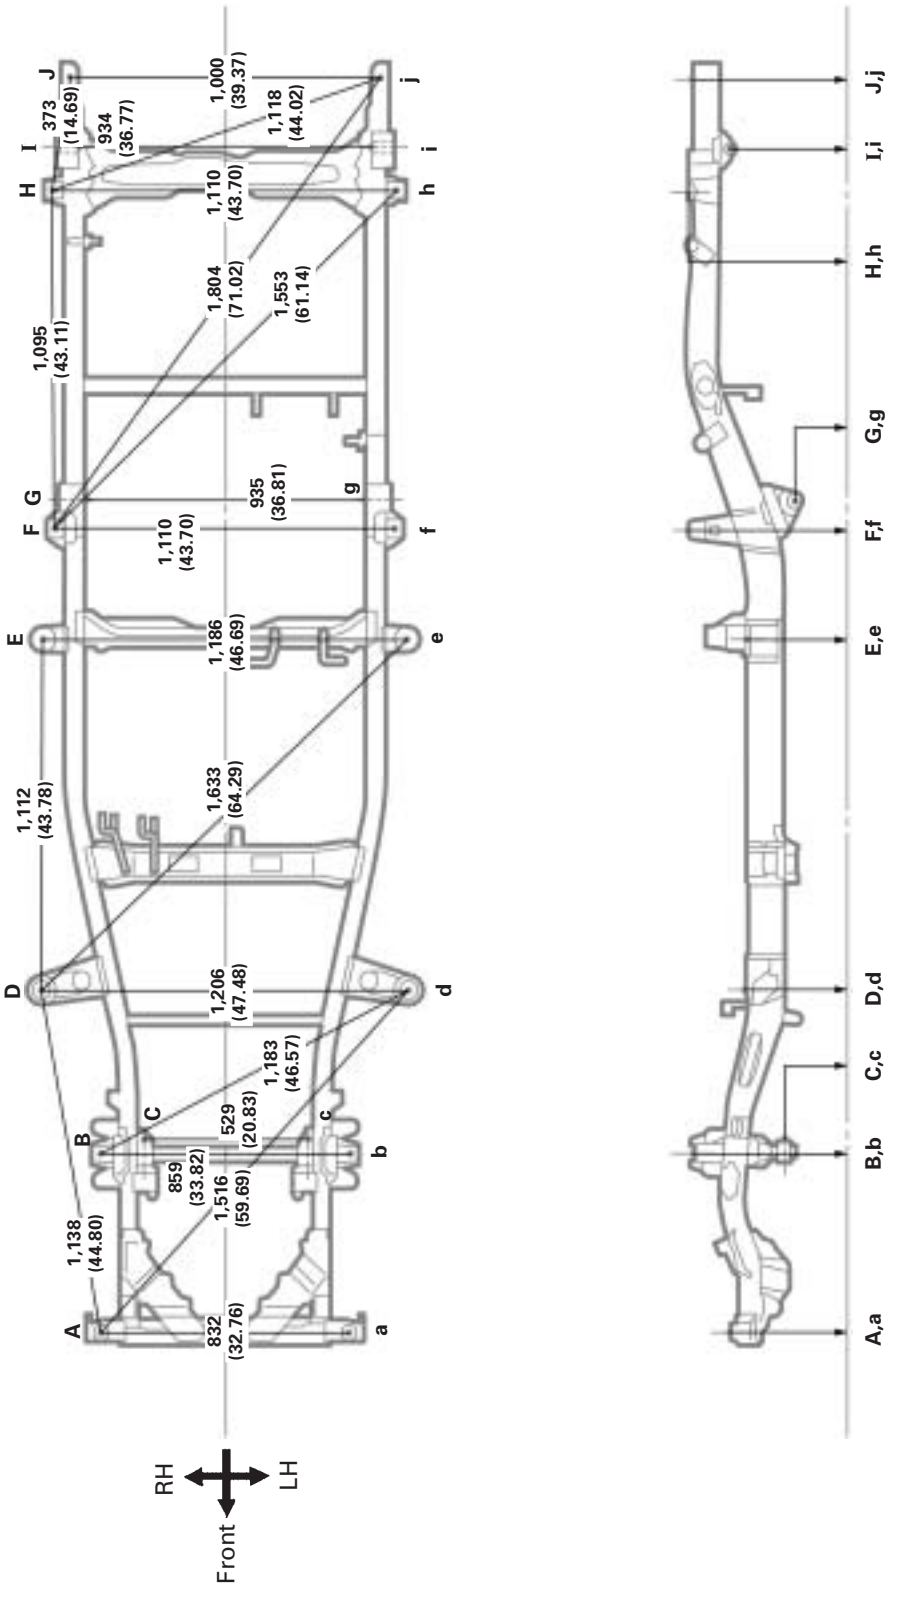


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	28 (1.10)

Symbol	Name	Hole dia.
F, f	Rear body mounting hole	22 (0.87)
G, g	Rear spring front hanger hole-inner	14.6 (0.575)
H, h	Rear body mounting hole	22 (0.87)
I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION
2WD REGULAR CAB
(Short Wheel Base Models except South Africa) (Cont'd)

(Two-Dimensional Distance)

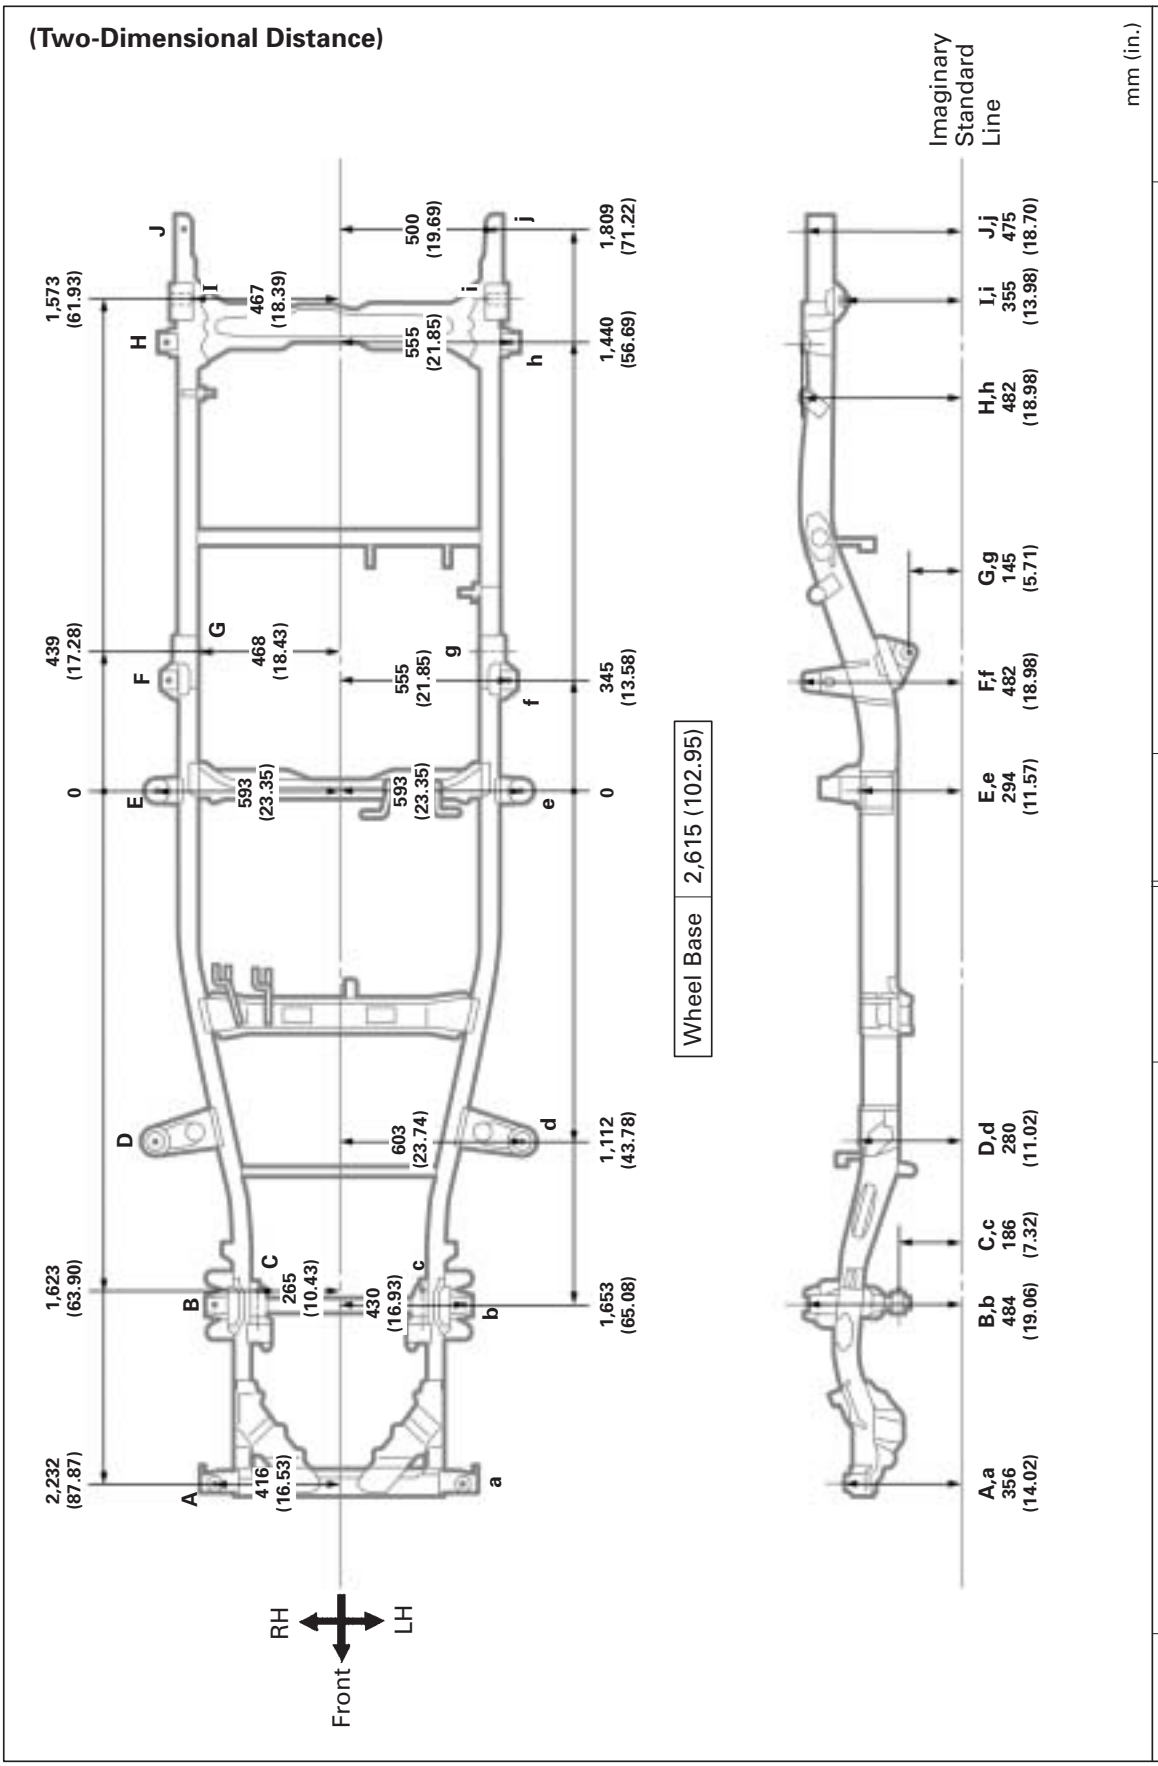

mm (in.)


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	28 (1.10)


Symbol	Name	Hole dia.
F, f	Rear body mounting hole	22 (0.87)
G, g	Rear spring front hanger hole-inner	14.6 (0.575)
H, h	Rear body mounting hole	22 (0.87)
I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION
2WD REGULAR CAB
(Short Wheel Base Model for South Africa)

(Three-Dimensional Distance)

mm (in.)

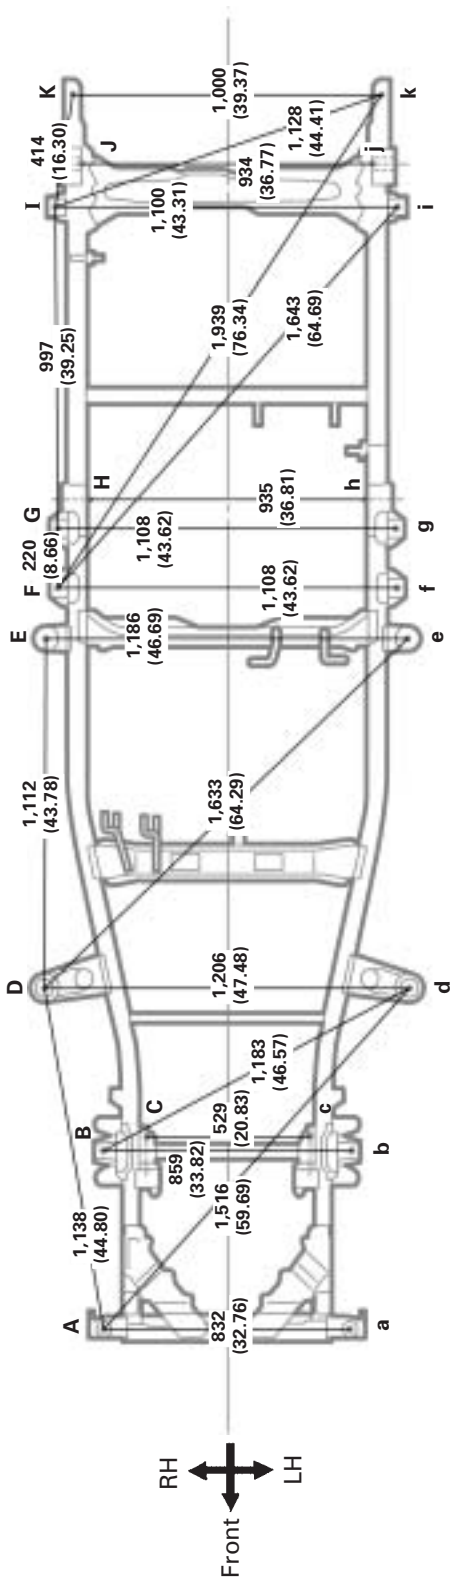

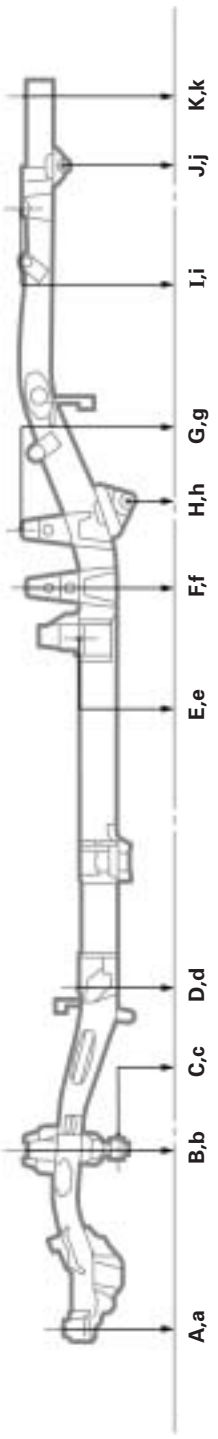


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole-rear	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	28 (1.10)
F, f	Rear body mounting hole	17 (0.67)

Symbol	Name	Hole dia.
G, g	Rear body mounting hole	17 (0.67)
H, h	Raer spring front hanger hole-inner	14.6 (0.575)
I, i	Rear body mounting hole	17 (0.67)
J, j	Rear spring rear hanger hole-inner	30.2 (1.189)
K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION
2WD REGULAR CAB
(Short Wheel Base Model for South Africa) (Cont'd)

(Two-Dimensional Distance)

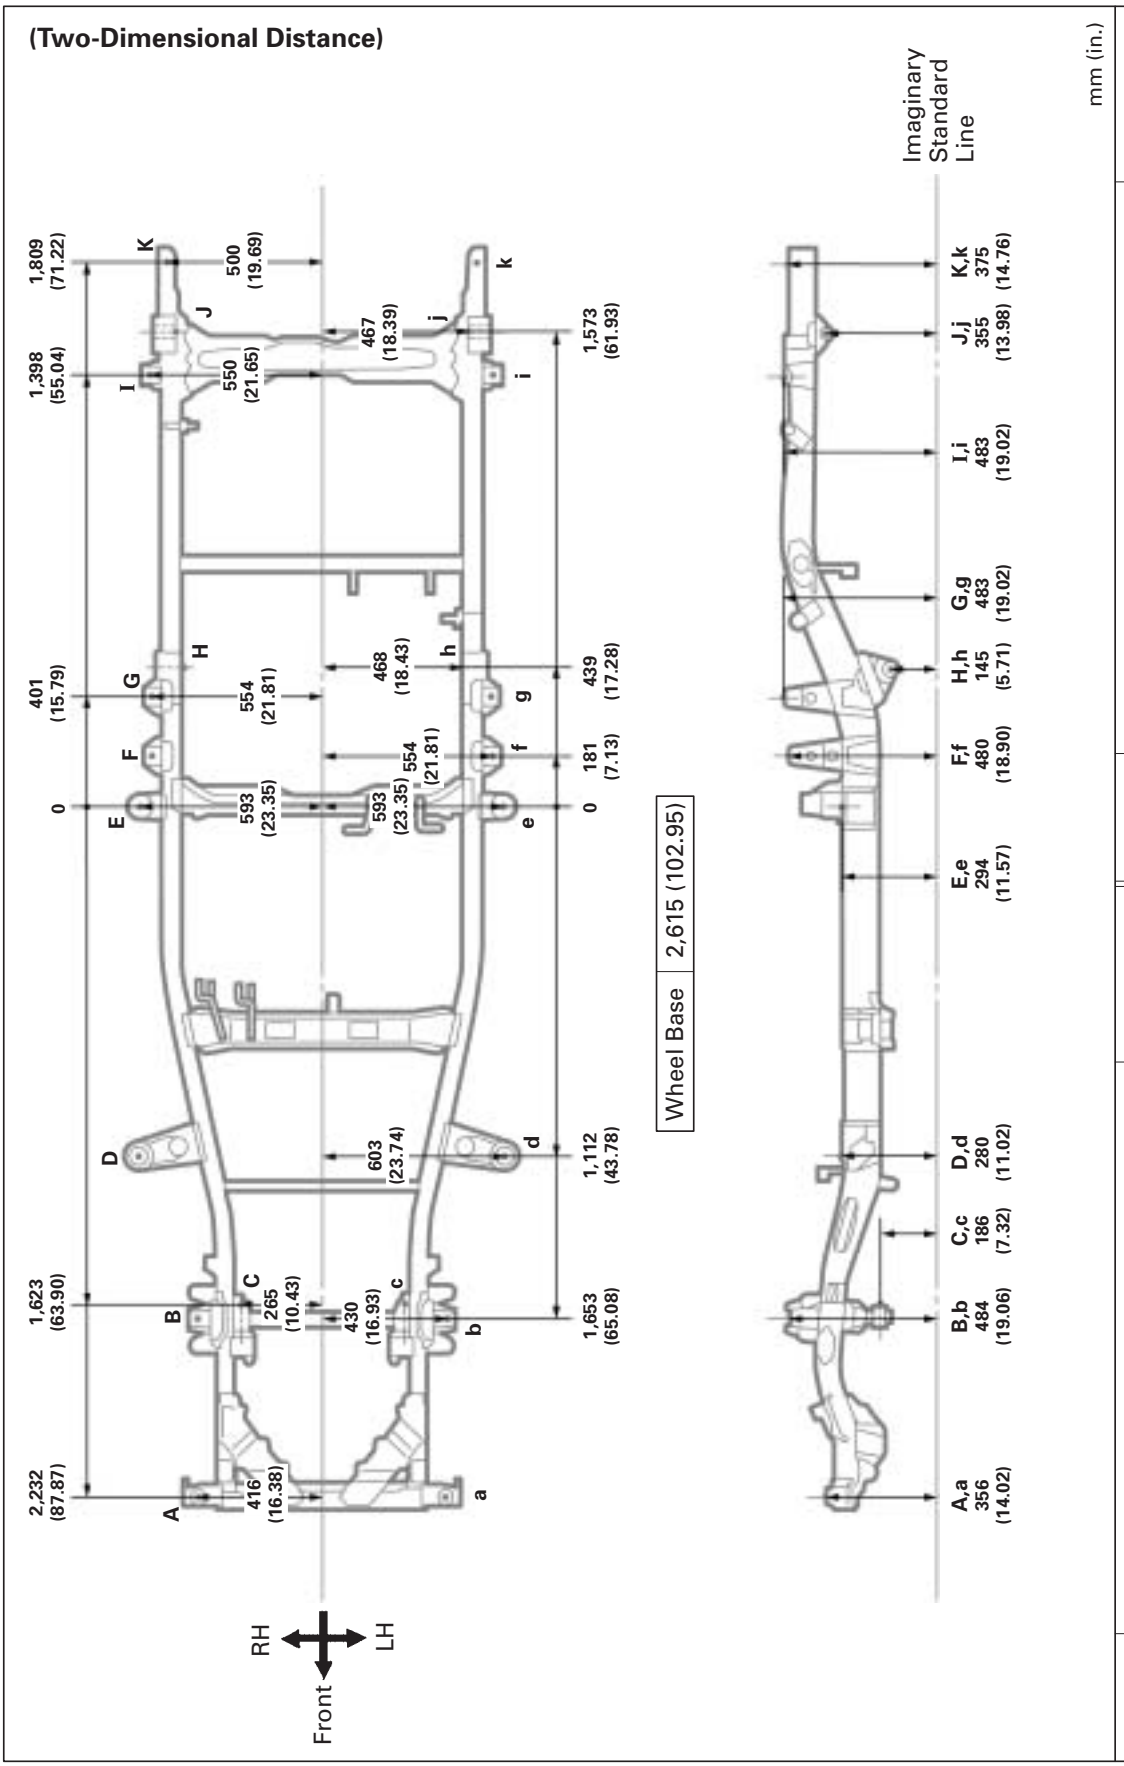


mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	G, g	Rear body mounting hole	17 (0.67)
B, b	Shock absorber installation hole	16 (0.63)	H, h	Rear spring front hanger hole-inner	14.6 (0.575)
C, c	Suspension lower arm installation hole-rear	36 (1.42)	I, i	Rear body mounting hole	17 (0.67)
D, d	Body mounting hole	24 (0.94)	J, j	Rear spring rear hanger hole-inner	30.2 (1.189)
E, e	Body mounting hole	28 (1.10)	K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
F, f	Rear body mounting hole	17 (0.67)	—	—	—

FRAME DIMENSION
2WD REGULAR CAB
(Long Wheel Base Models except South Africa & Thailand)

(Three-Dimensional Distance)

mm (in.)

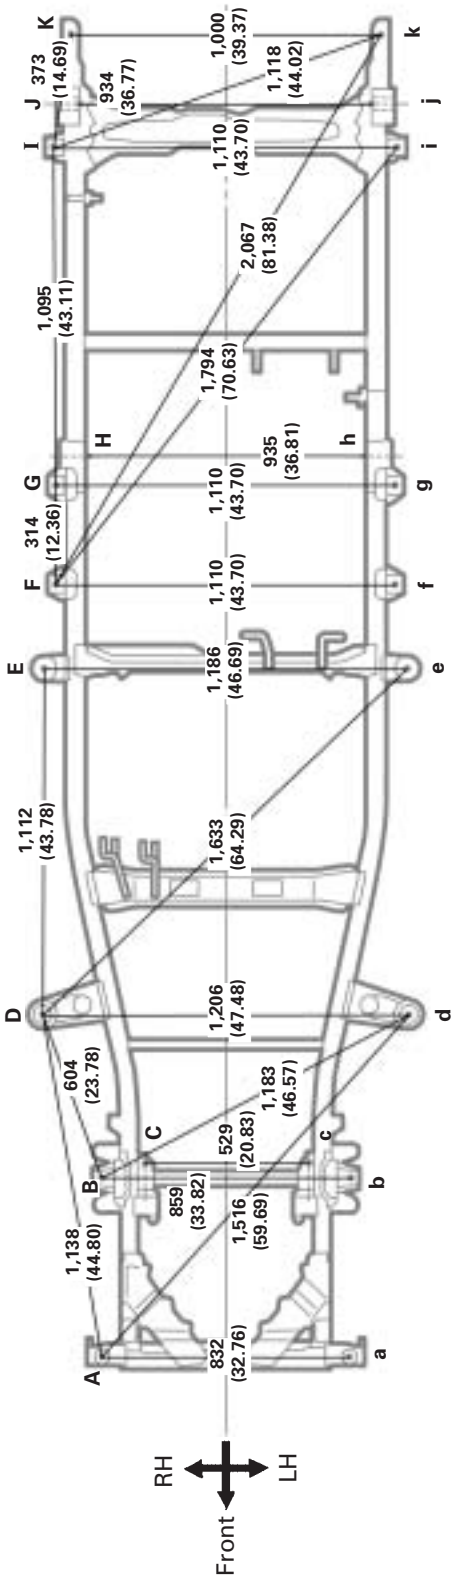

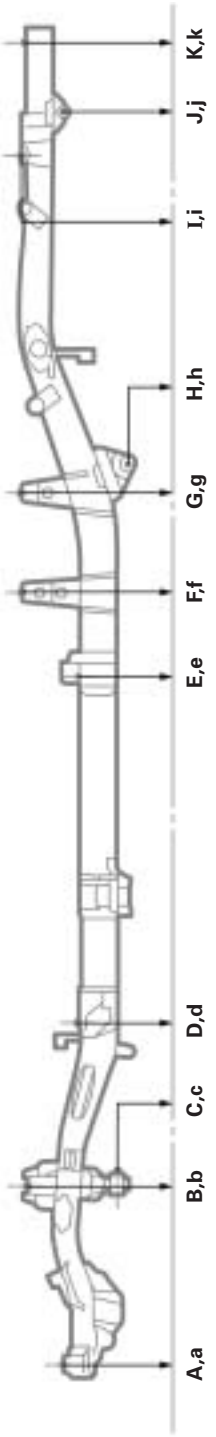


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole-rear	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	28 (1.10)
F, f	Rear body mounting hole	22 (0.87)

Symbol	Name	Hole dia.
G, g	Rear body mounting hole	22 (0.87)
H, h	Rear spring front hanger hole-inner	14.6 (0.575)
I, i	Rear body mounting hole	22 (0.87)
J, j	Rear spring rear hanger hole-inner	30.2 (1.189)
K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION
2WD REGULAR CAB
(Long Wheel Base Models except South Africa & Thailand) (Cont'd)

(Two-Dimensional Distance)

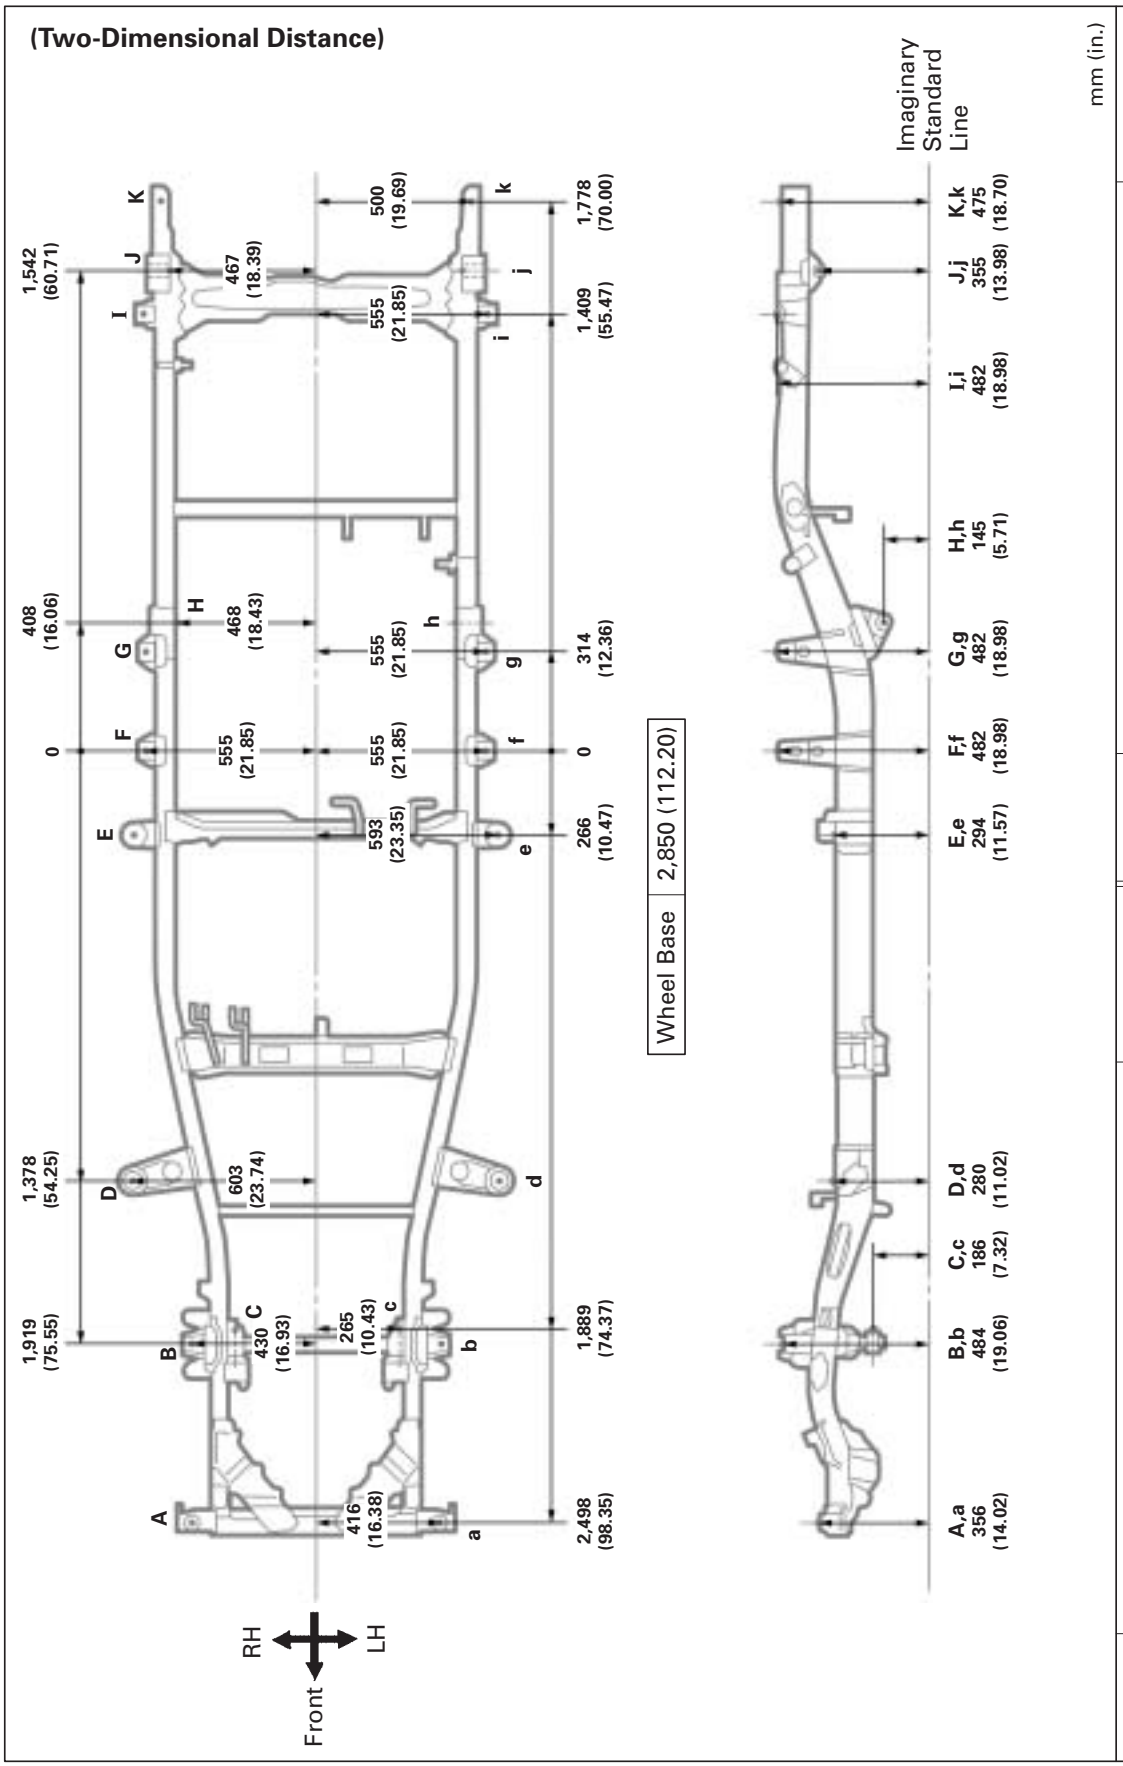


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	G, g	Rear body mounting hole	22 (0.87)
B, b	Shock absorber installation hole	16 (0.63)	H, h	Rear spring front henger hole-inner	14.6 (0.575)
C, c	Suspension lower arm installatrion hole-rear	36 (1.42)	I, i	Rear body mounting hole	22 (0.87)
D, d	Body mounting hole	24 (0.94)	J, j	Rear spring rear hanger hole-inner	30.2 (1.189)
E, e	Body mounting hole	28 (1.10)	K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
F, f	Rear body mounting hole	22 (0.87)	—	—	—

FRAME DIMENSION
2WD REGULAR CAB
(Long Wheel Base Models for South Africa & Thailand)

(Three-Dimensional Distance)

mm (in.)

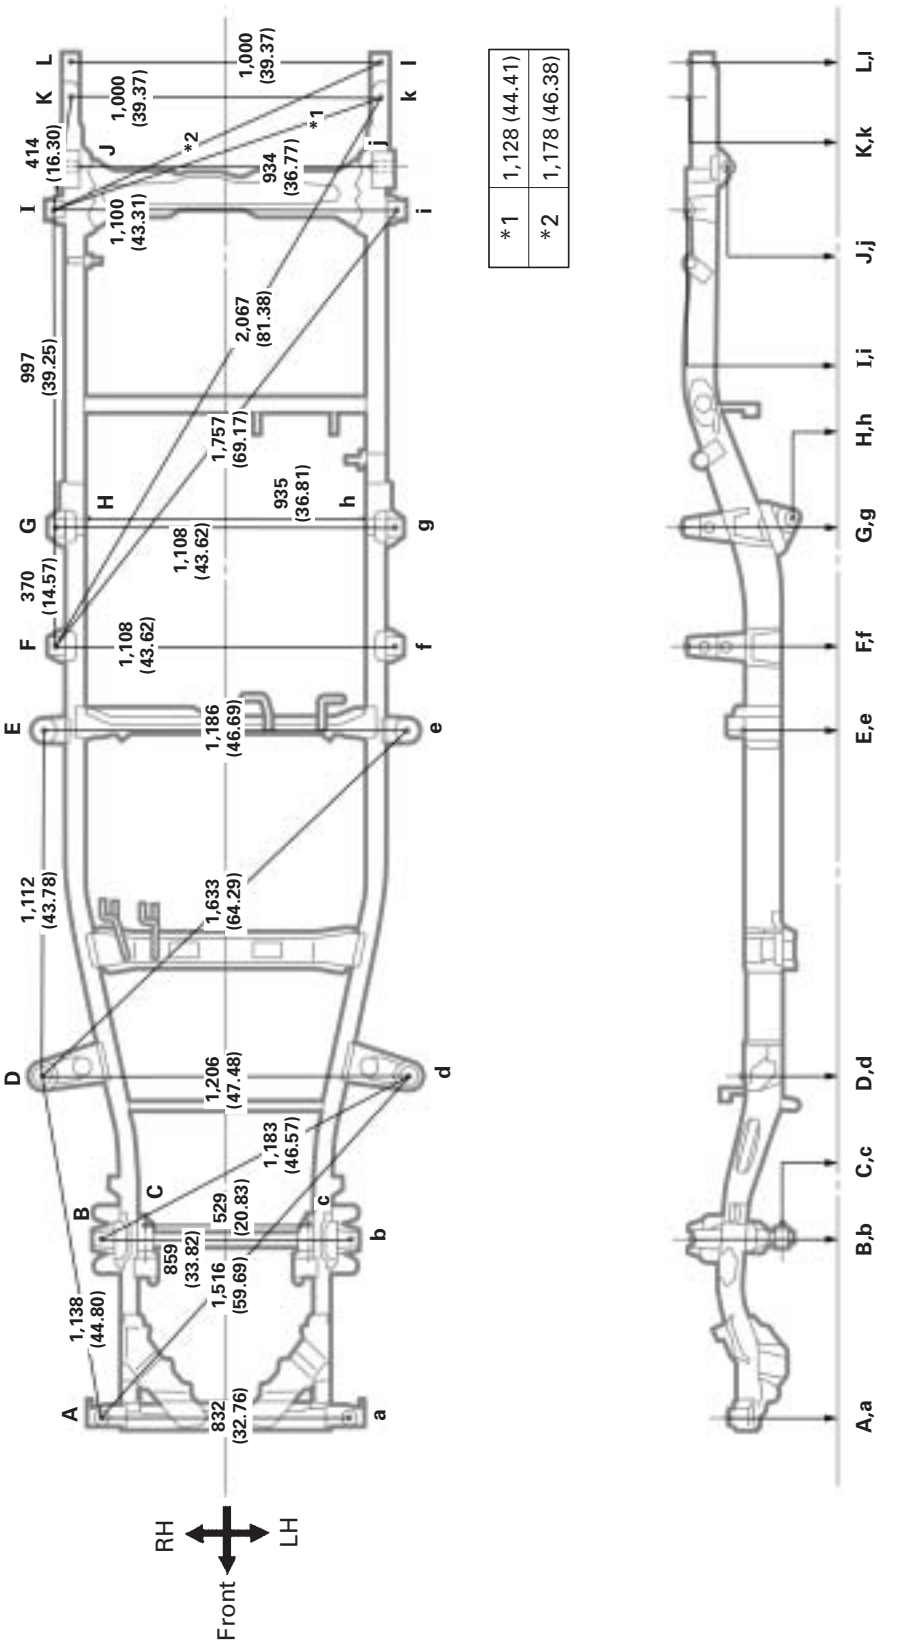


*1	1,128 (44.41)
*2	1,178 (46.38)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	G, g	Rear body mounting hole	17 (0.67)
B, b	Shock absorber installation hole	16 (0.63)	H, h	Rear spring front hanger hole-inner	14.6 (0.575)
C, c	Suspension lower arm installation hole	36 (1.42)	I, i	Rear body mounting hole	17 (0.67)
D, d	Body mounting hole	24 (0.94)	J, j	Rear spring rear hanger hole-inner	30.2 (1.189)
E, e	Body mounting hole	28 (1.10)	K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
F, f	Rear body mounting hole	17 (0.67)	L, l	Rear body mounting hole	18 (0.71)

FRAME DIMENSION
2WD REGULAR CAB
(Long Wheel Base Models for South Africa & Thailand) (Cont'd)

(Two-Dimensional Distance)

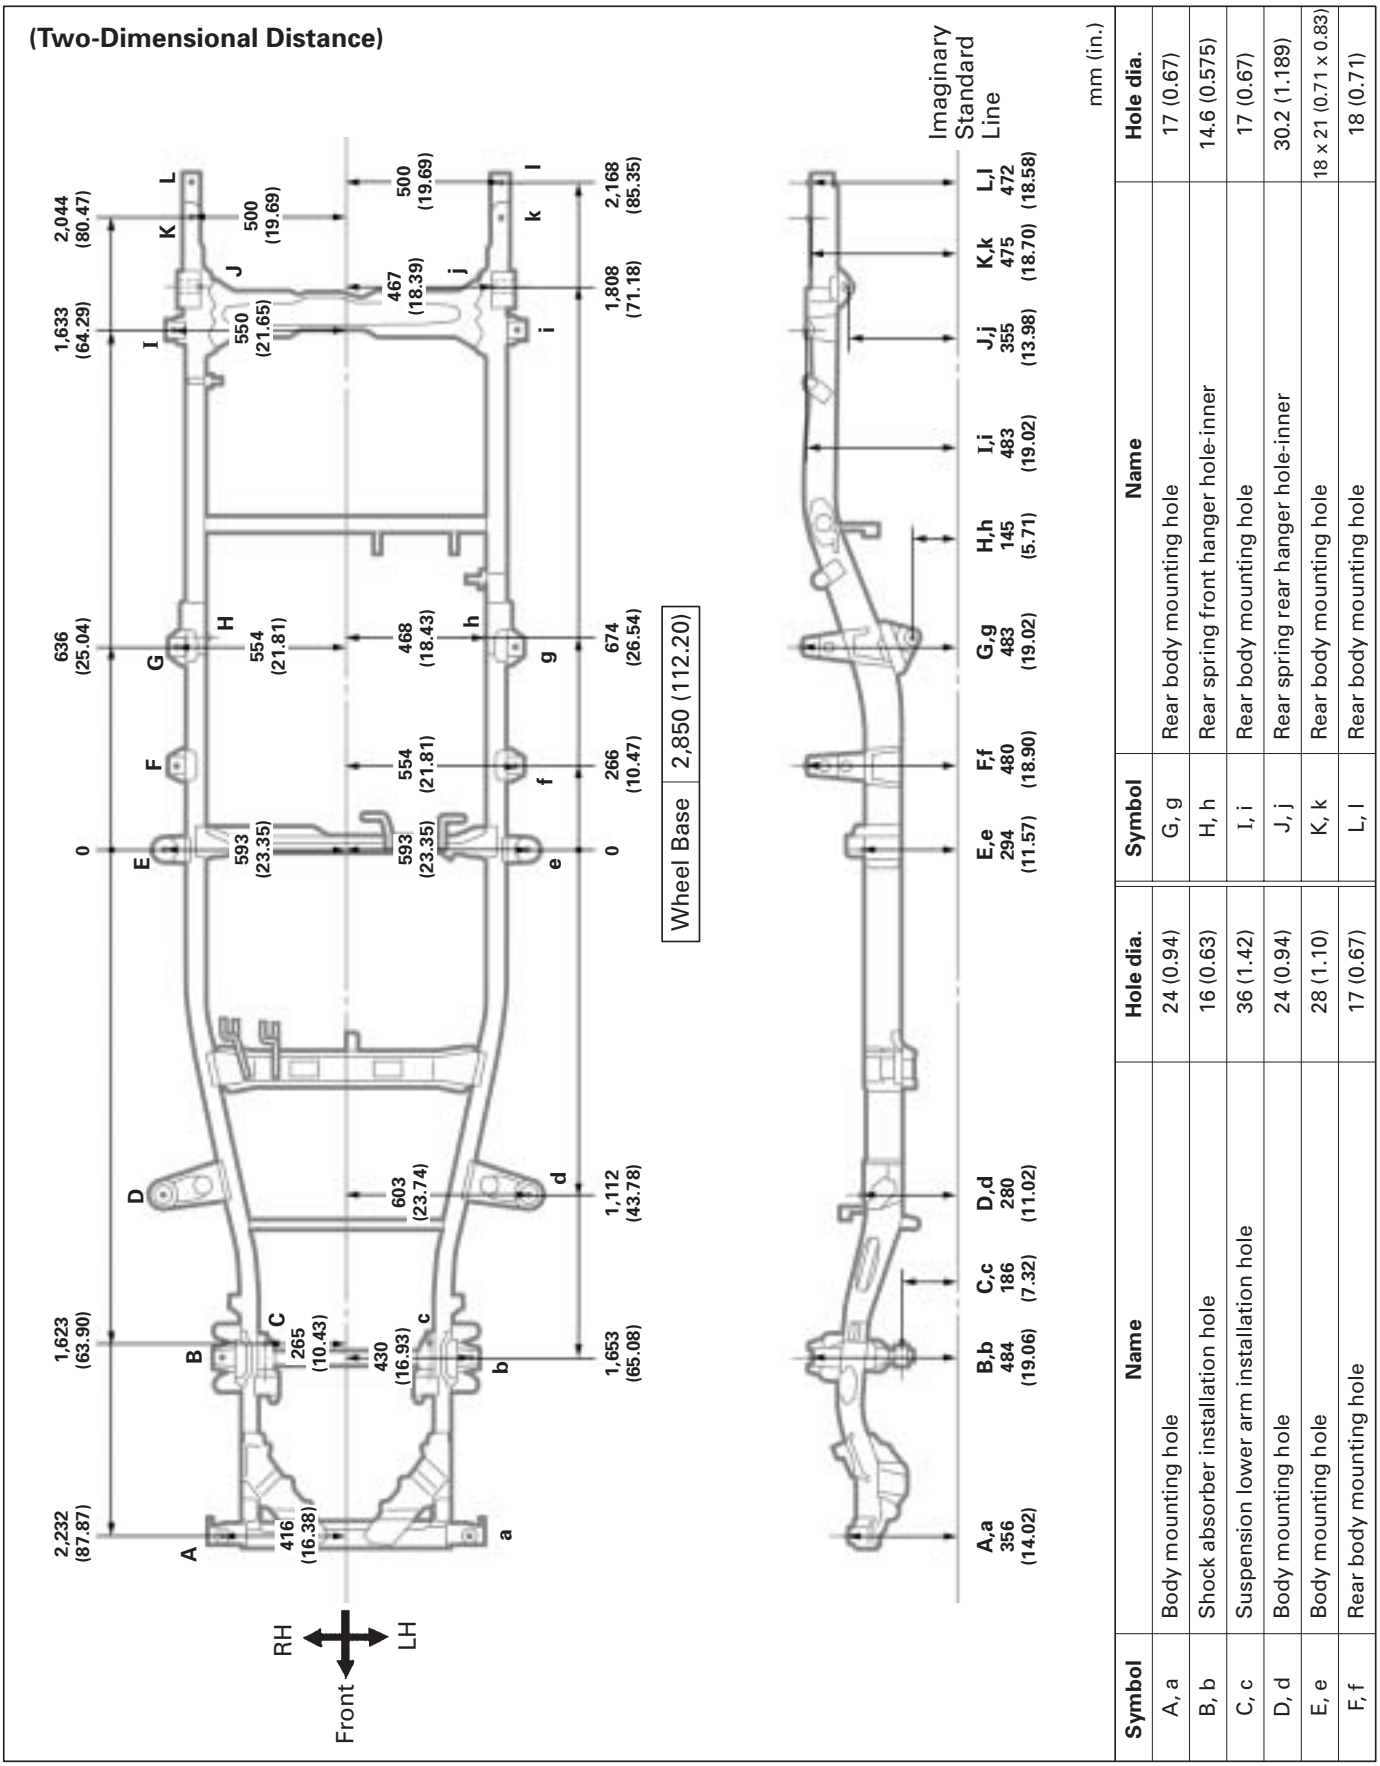


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	28 (1.10)
F, f	Rear body mounting hole	17 (0.67)

Symbol	Name	Hole dia.
G, g	Rear body mounting hole	17 (0.67)
H, h	Rear spring front hanger hole-inner	14.6 (0.575)
I, i	Rear body mounting hole	17 (0.67)
J, j	Rear spring rear hanger hole-inner	30.2 (1.189)
K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
L, l	Rear body mounting hole	18 (0.71)

FRAME DIMENSION
2WD REGULAR CAB
(Super Long Wheel Base Models for Thailand)

(Three-Dimensional Distance)

mm (in.)

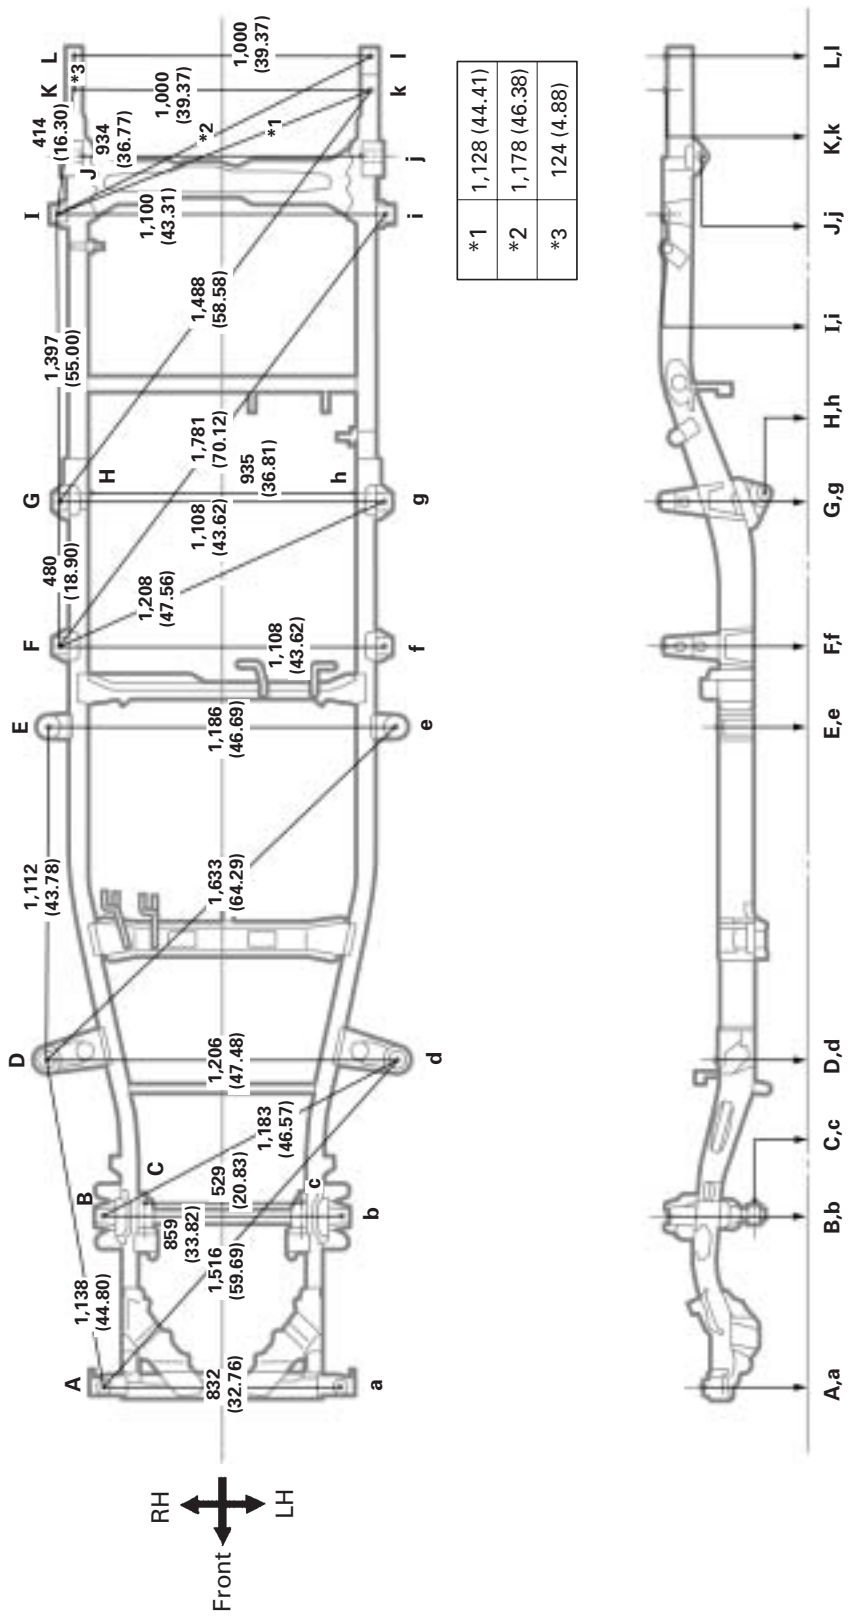


*1	1,128 (44.41)
*2	1,178 (46.38)
*3	124 (4.88)

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	28 (1.10)
F, f	Rear body mounting hole	17 (0.67)

Symbol	Name	Hole dia.
G, g	Rear body mounting hole	17 (0.67)
H, h	Rear spring front hanger hole-inner	14.6 (0.575)
I, i	Rear body mounting hole	17 (0.67)
J, j	Rear spring rear hanger hole-inner	30.2 (1.189)
K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
L, l	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION
2WD REGULAR CAB
(Super Long Wheel Base Models for Thailand) (Cont'd)

(Two-Dimensional Distance)

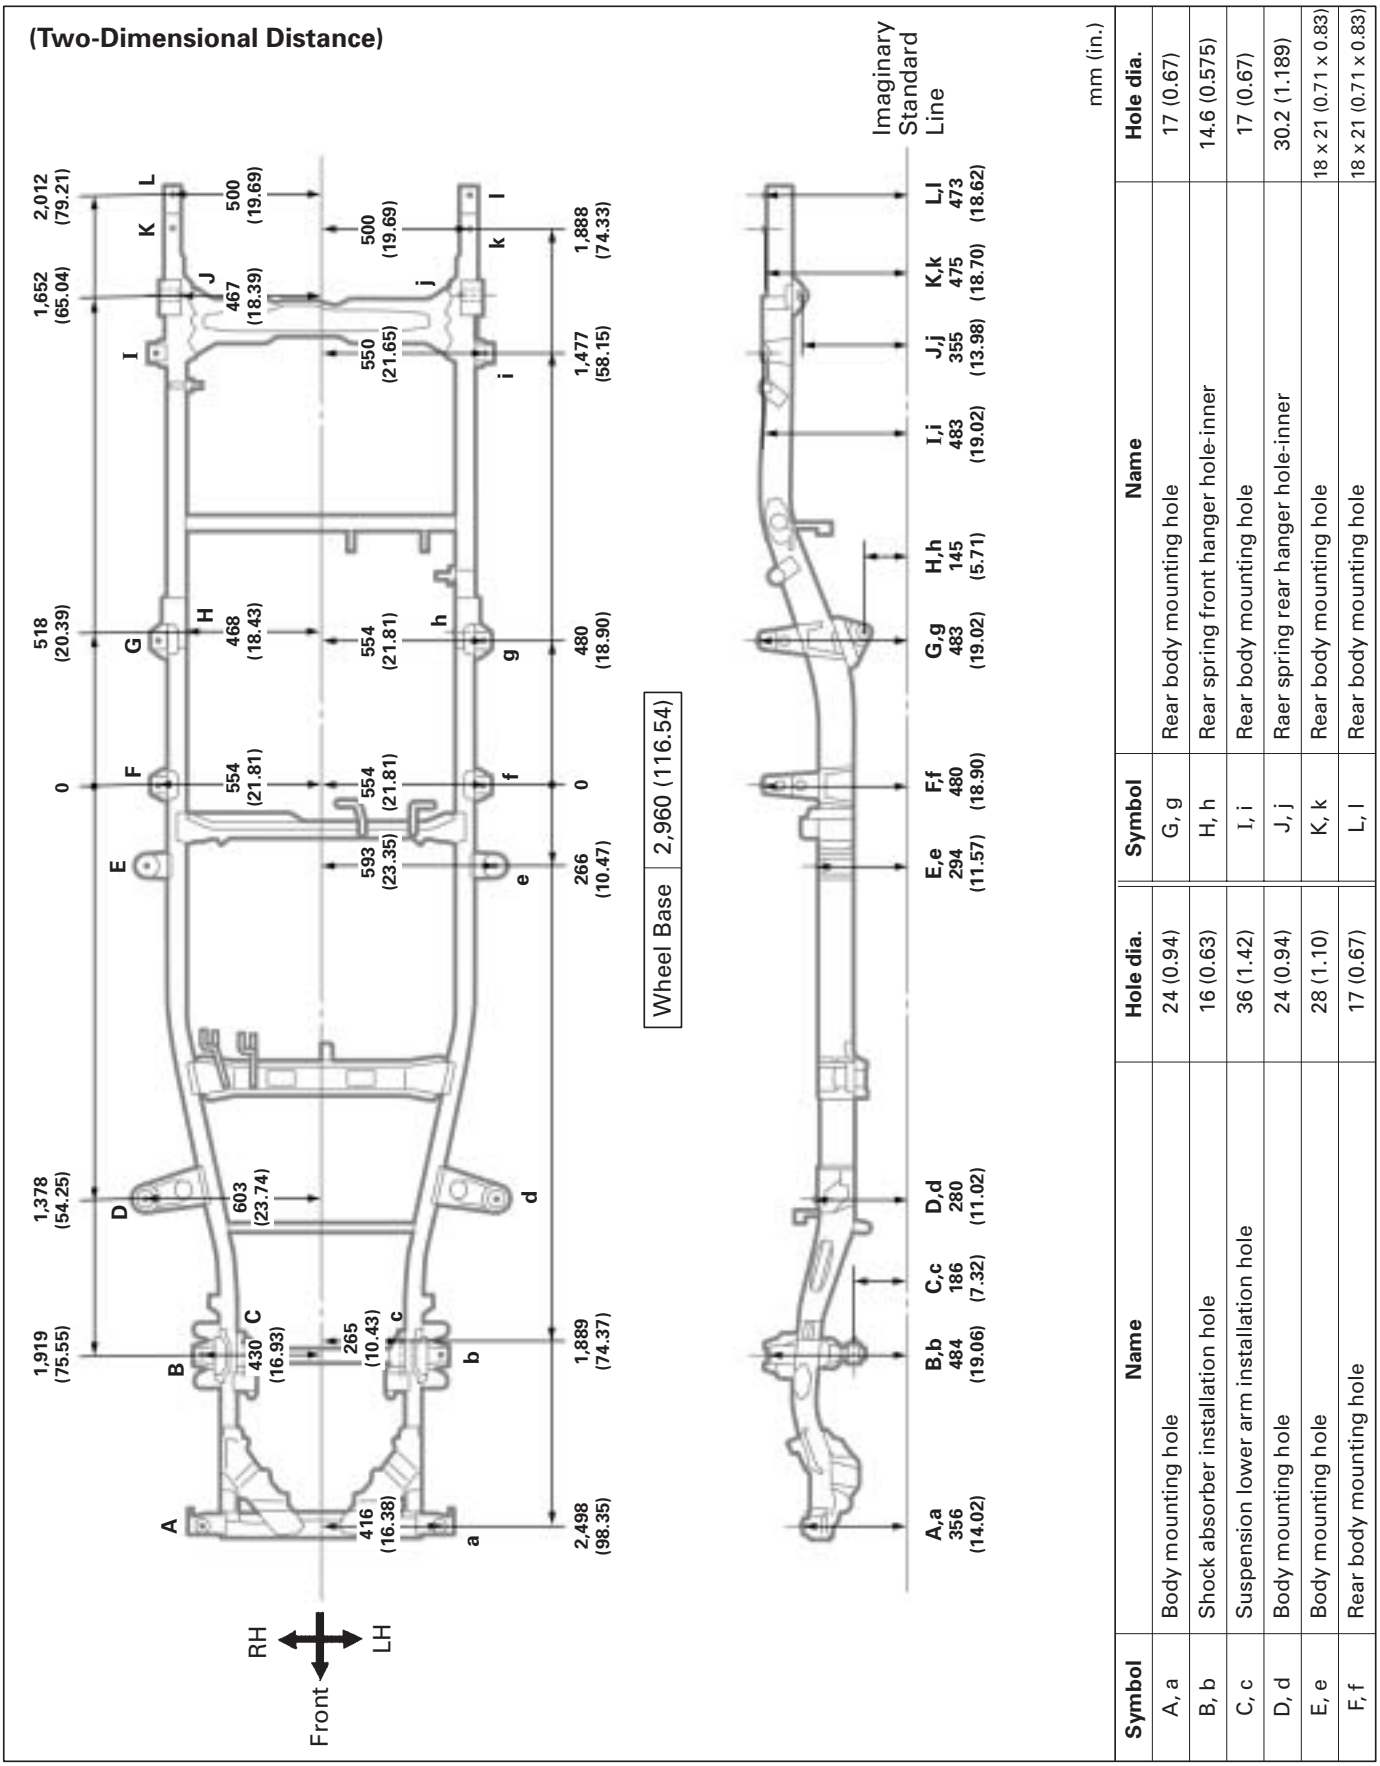

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	28 (1.10)
F, f	Rear body mounting hole	17 (0.67)


Symbol	Name	Hole dia.
G, g	Rear body mounting hole	17 (0.67)
H, h	Rear spring front hanger hole-inner	14.6 (0.575)
I, i	Rear body mounting hole	17 (0.67)
J, j	Raer spring rear hanger hole-inner	30.2 (1.189)
K, k	Rear body mounting hole	18 x 21 (0.71 x 0.83)
L, l	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

2WD DOUBLE CAB (Except South Africa)

(Three-Dimensional Distance)

mm (in.)

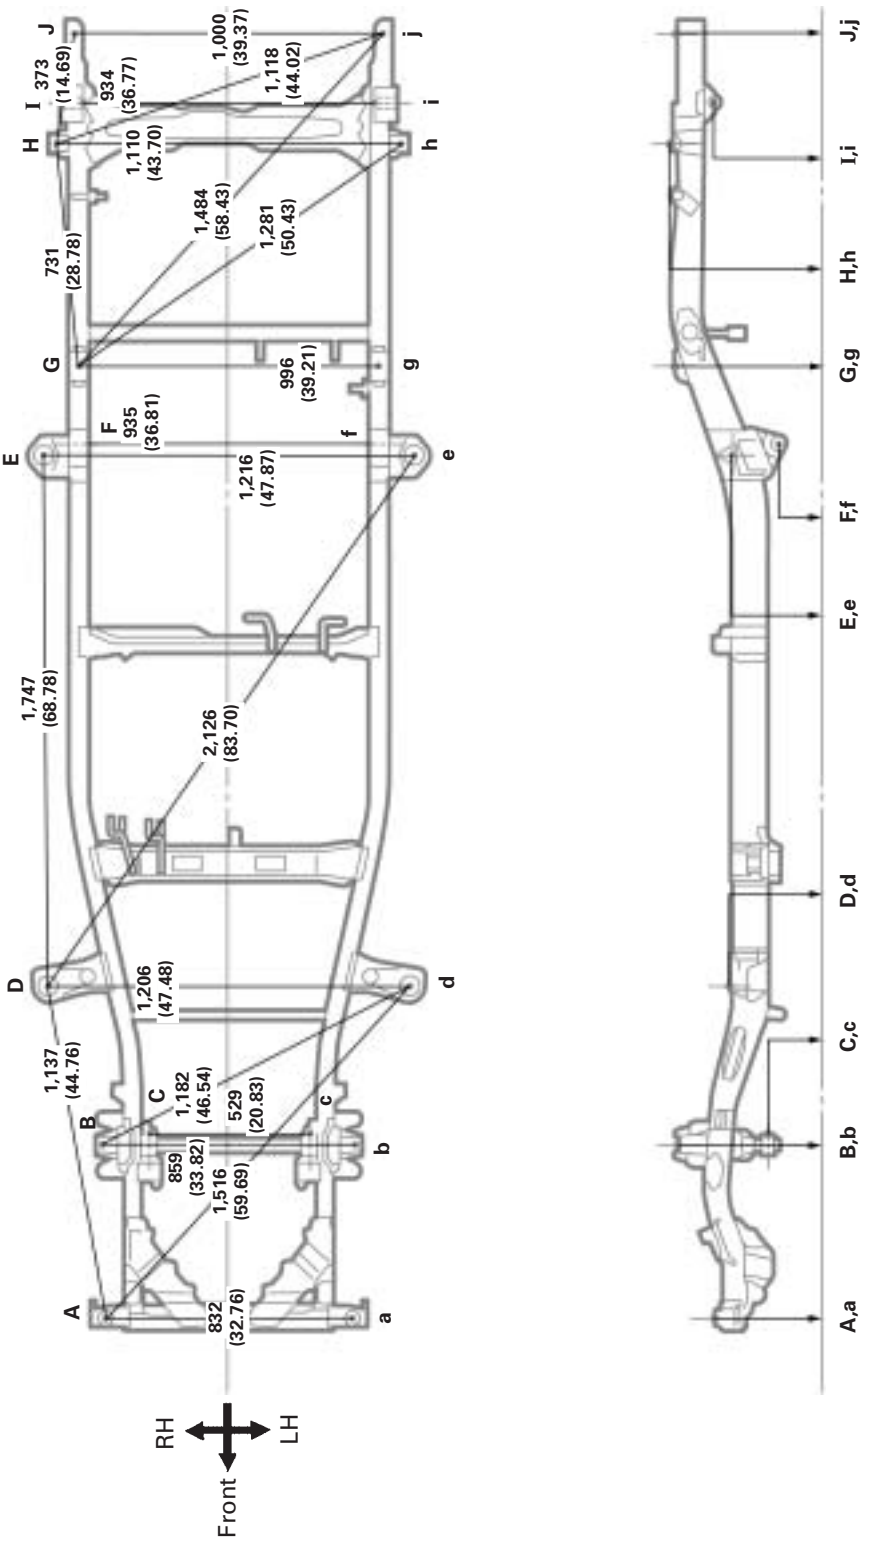


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	F, f	Rear spring front hanger hole-inner	G.C.C.: 14.5 (0.571) Ex.G.C.C.: 14.6 (0.575)
B, b	Shock absorber installation hole	16 (0.63)	G, g	Rear body mounting hole	13 (0.51)
C, c	Suspension lower arm installation hole	36 (1.42)	H, h	Rear body mounting hole	22 (0.87)
D, d	Body mounting hole	70 (2.76)	I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
E, e	Body mounting hole	70 (2.76)	J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

2WD DOUBLE CAB (Except South Africa) (Cont'd)

(Two-Dimensional Distance)

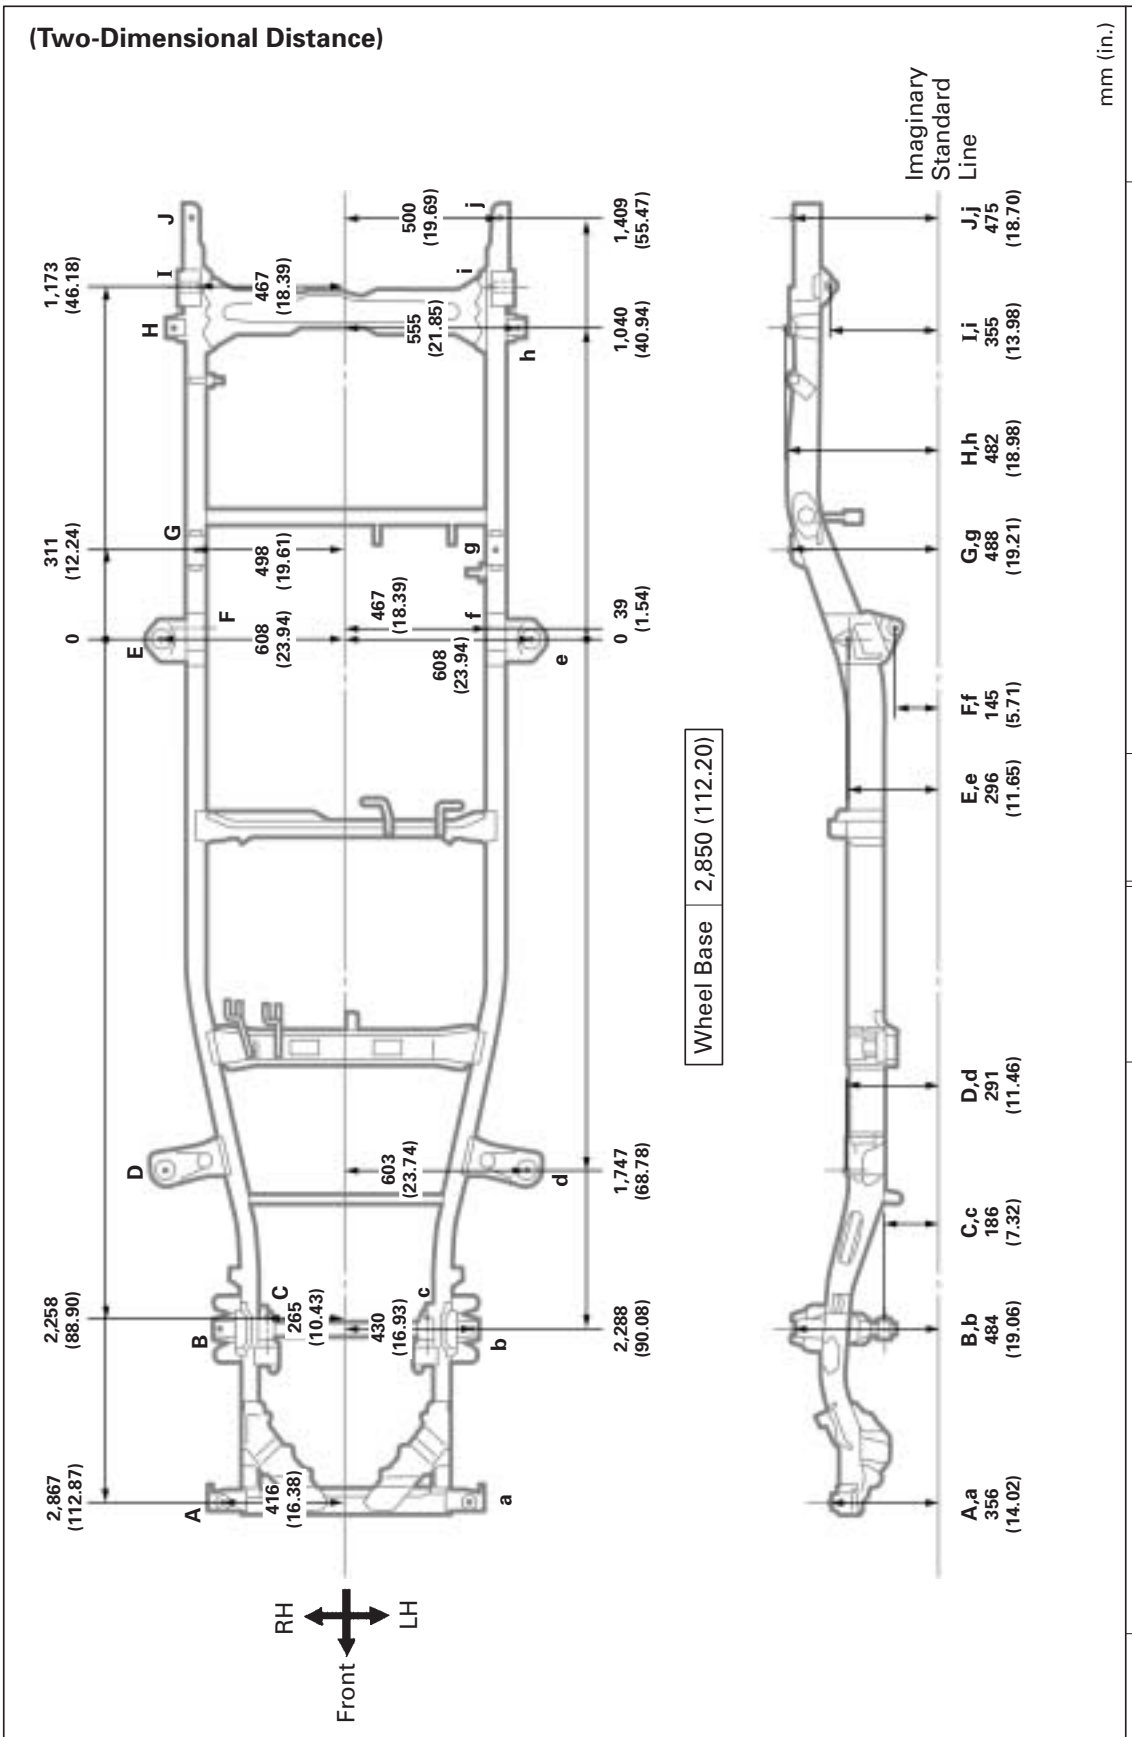


mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	F, f	Rear spring front hanger hole-inner	G.C.C.: 14.5 (0.571) Ex.G.C.C.: 14.6 (0.575)
B, b	Shock absorber installation hole	16 (0.63)	G, g	Rear body mounting hole	13 (0.51)
C, c	Suspension lower arm installation hole	36 (1.42)	H, h	Rear body mounting hole	22 (0.87)
D, d	Body mounting hole	70 (2.76)	I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
E, e	Body mounting hole	70 (2.76)	J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

2WD DOUBLE CAB (For South Africa)

(Three-Dimensional Distance)

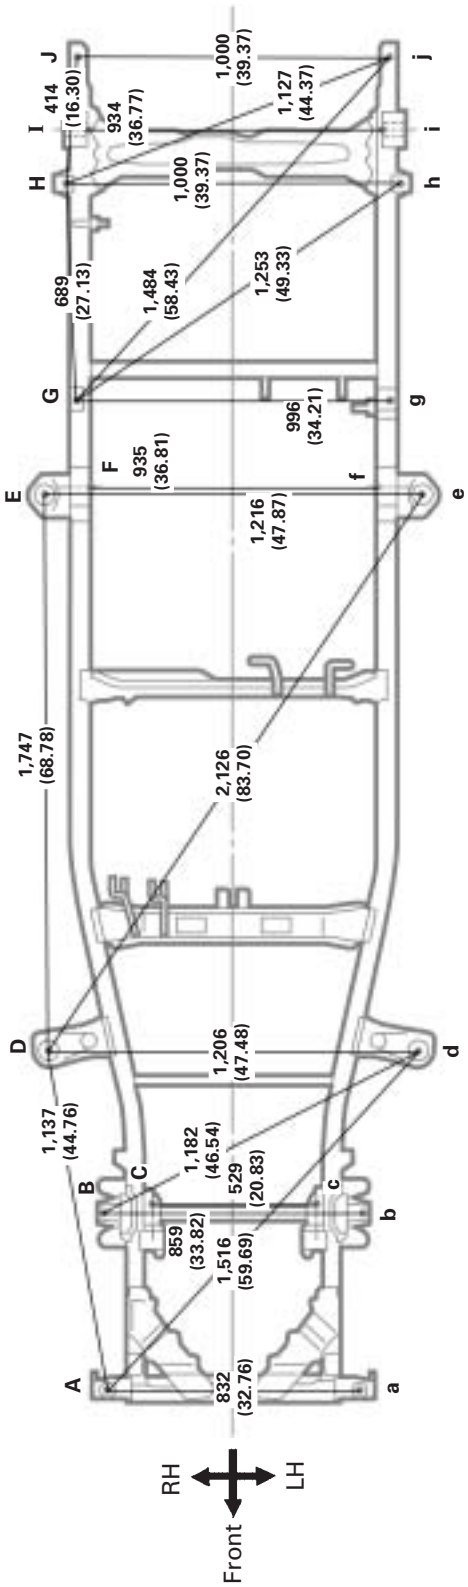

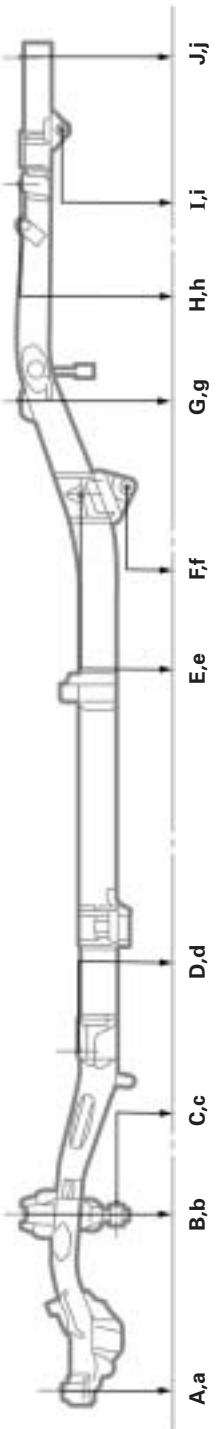

mm (in.)


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	70 (2.76)
E, e	Body mounting hole	70 (2.76)

Symbol	Name	Hole dia.
F, f	Rear spring front hanger hole-inner	14.6 (0.575)
G, g	Rear body mounting hole	13 (0.51)
H, h	Rear body mounting hole	22 (0.87)
I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

2WD DOUBLE CAB (For South Africa) (Cont'd)

(Two-Dimensional Distance)

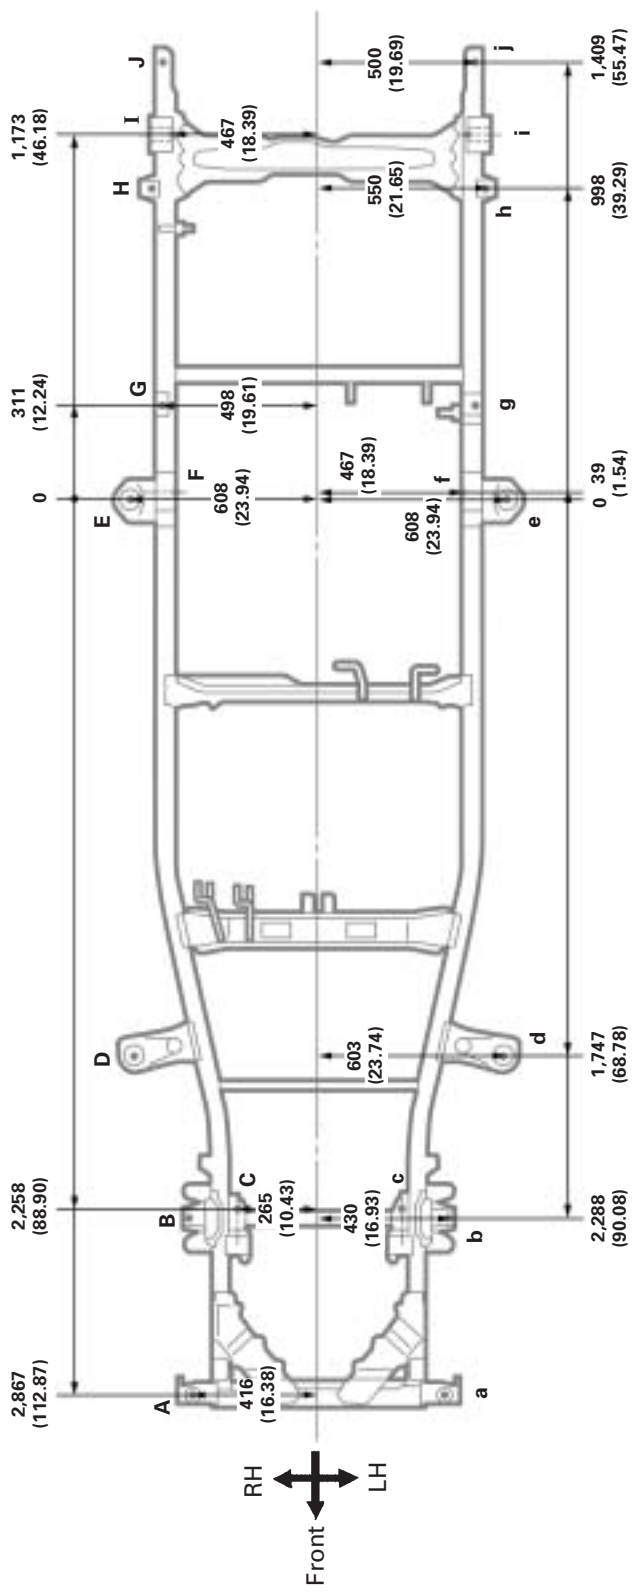


mm (in.)

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	70 (2.76)
E, e	Body mounting hole	70 (2.76)

Symbol	Name	Hole dia.
F, f	Rear spring front hanger hole-inner	14.6 (0.575)
G, g	Rear body mounting hole	13 (0.51)
H, h	Rear body mounting hole	22 (0.87)
I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION
4WD STYLE 2WD REGULAR CAB

(Three-Dimensional Distance)

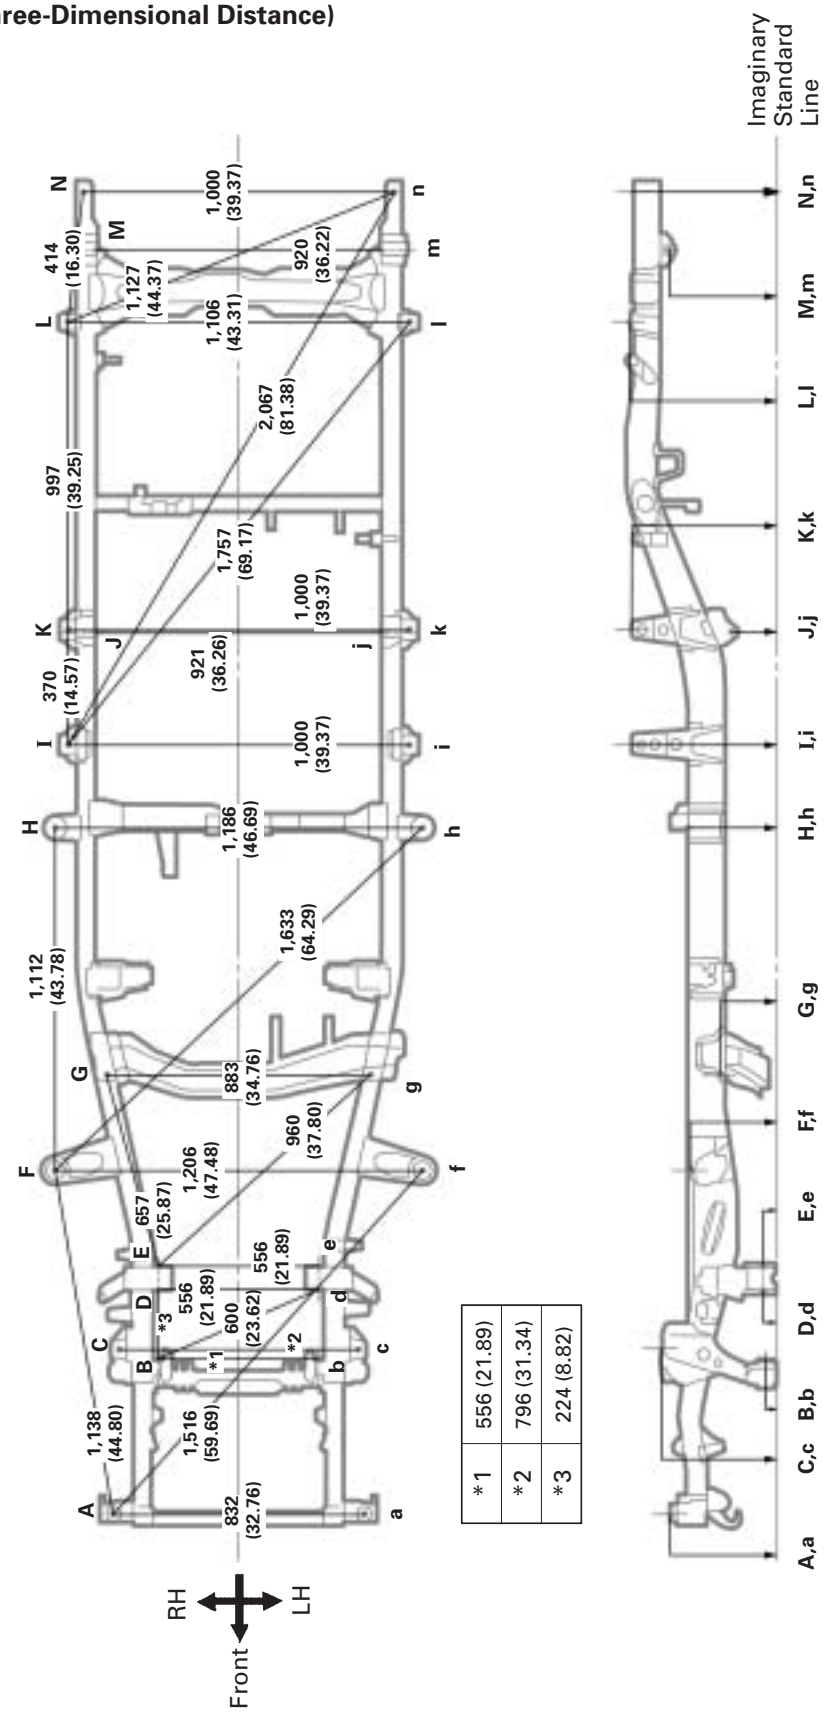

*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)


mm (in.)

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
F, f	Body mounting hole	24 (0.94)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Body mounting hole	28 (1.10)
I, i	Rear body mounting hole	17 (0.67)
J, j	Rear spring front hanger hole-inner	14.3 (0.563)
K, k	Rear body mounting hole	17 (0.67)
L, l	Rear body mounting hole	17 (0.67)
M, m	Rear spring rear hanger hole-inner	30.4 (1.197)
N, n	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION
4WD STYLE 2WD REGULAR CAB (Cont'd)

(Two-Dimensional Distance)

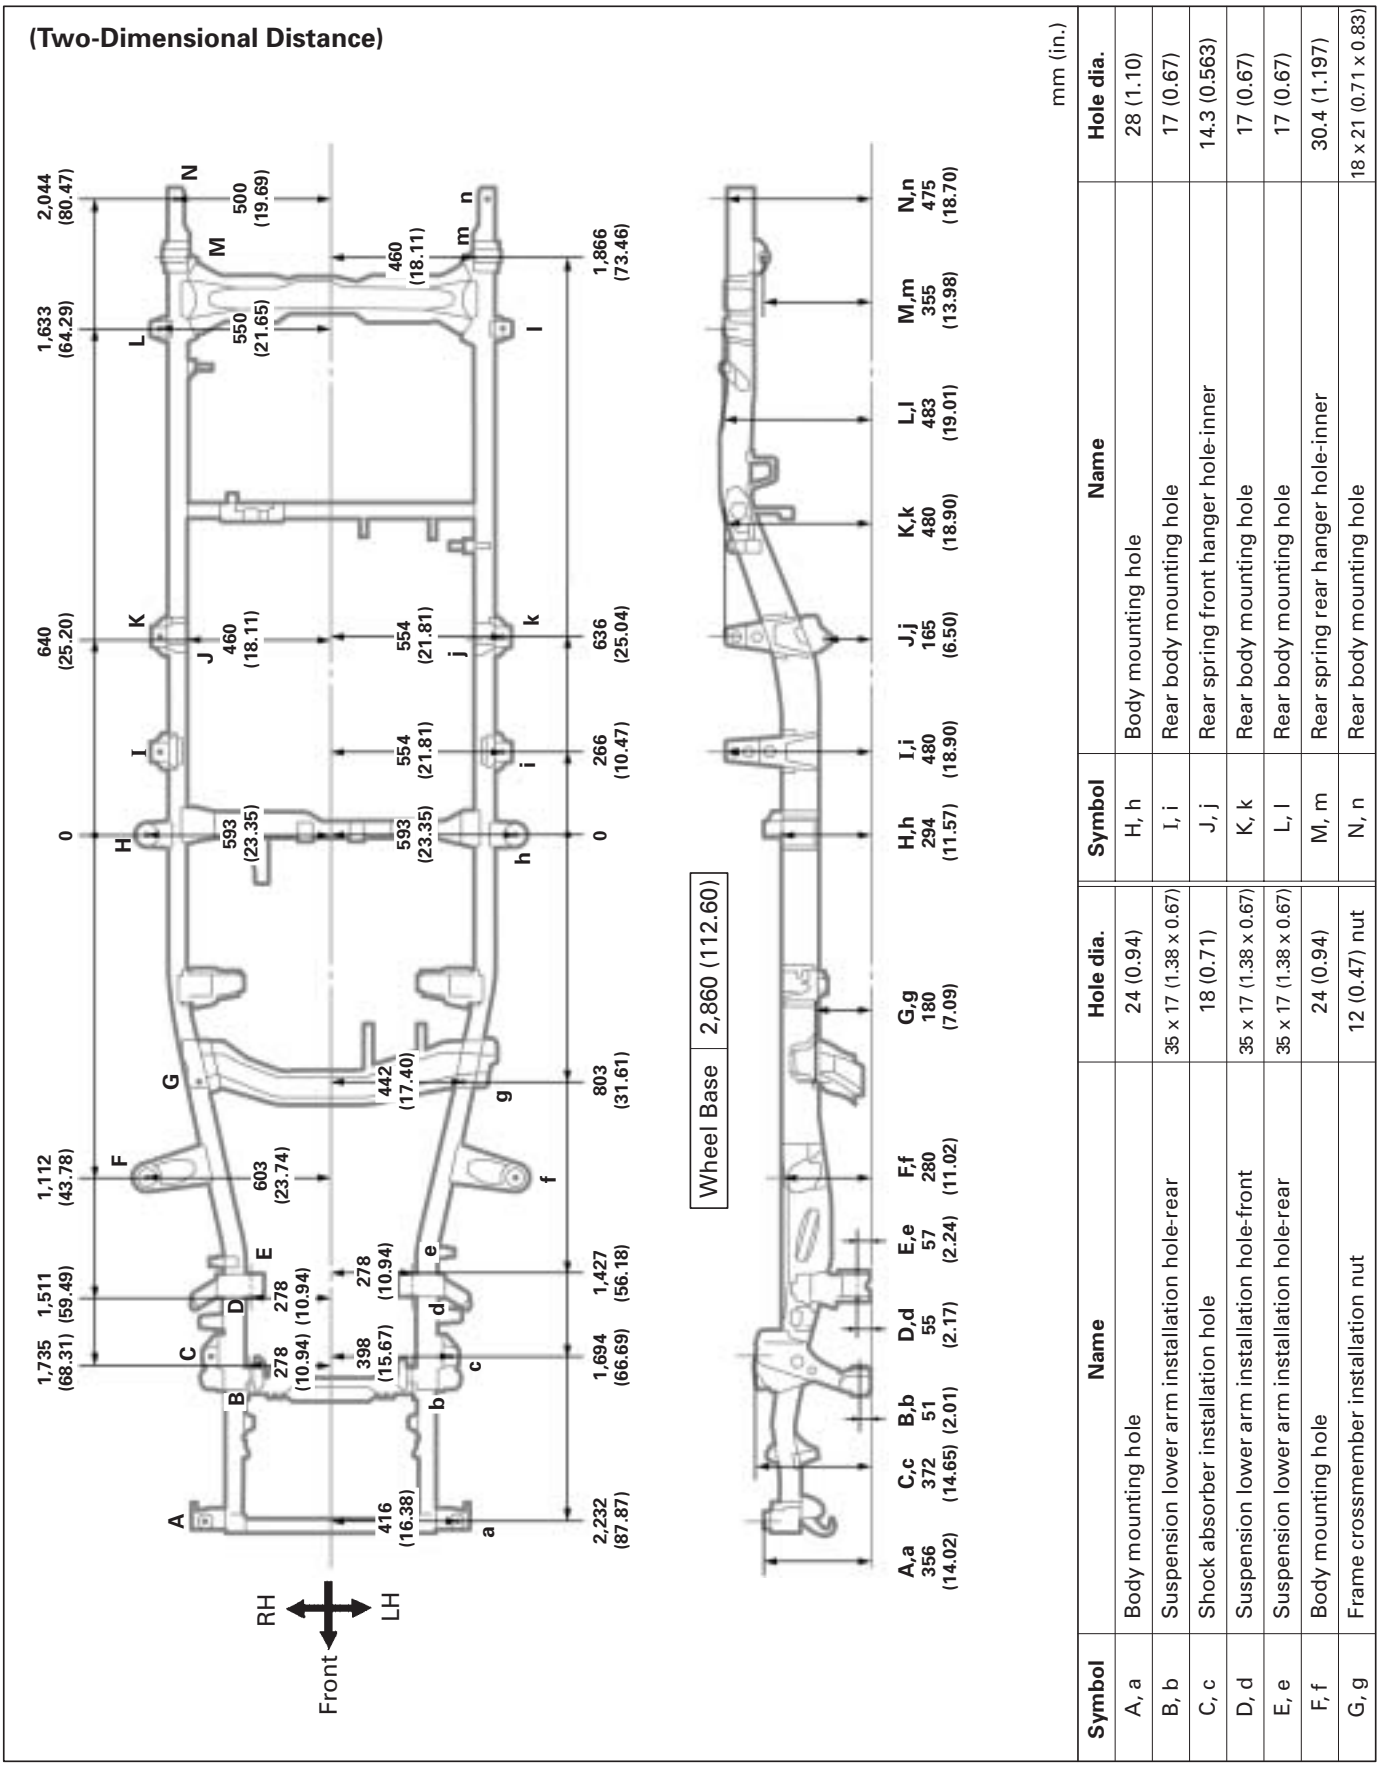


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	H, h	Body mounting hole	28 (1.10)
B, b	Suspension lower arm installation hole-rear	35 × 17 (1.38 × 0.67)	I, i	Rear body mounting hole	17 (0.67)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Rear spring front hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole-front	35 × 17 (1.38 × 0.67)	K, k	Rear body mounting hole	17 (0.67)
E, e	Suspension lower arm installation hole-rear	35 × 17 (1.38 × 0.67)	L, l	Rear body mounting hole	17 (0.67)
F, f	Body mounting hole	24 (0.94)	M, m	Rear spring rear hanger hole-inner	30.4 (1.197)
G, g	Frame crossmember installation nut	12 (0.47) nut	N, n	Rear body mounting hole	18 × 21 (0.71 × 0.83)

FRAME DIMENSION
4WD STYLE 2WD DOUBLE CAB

(Three-Dimensional Distance)

mm (in.)

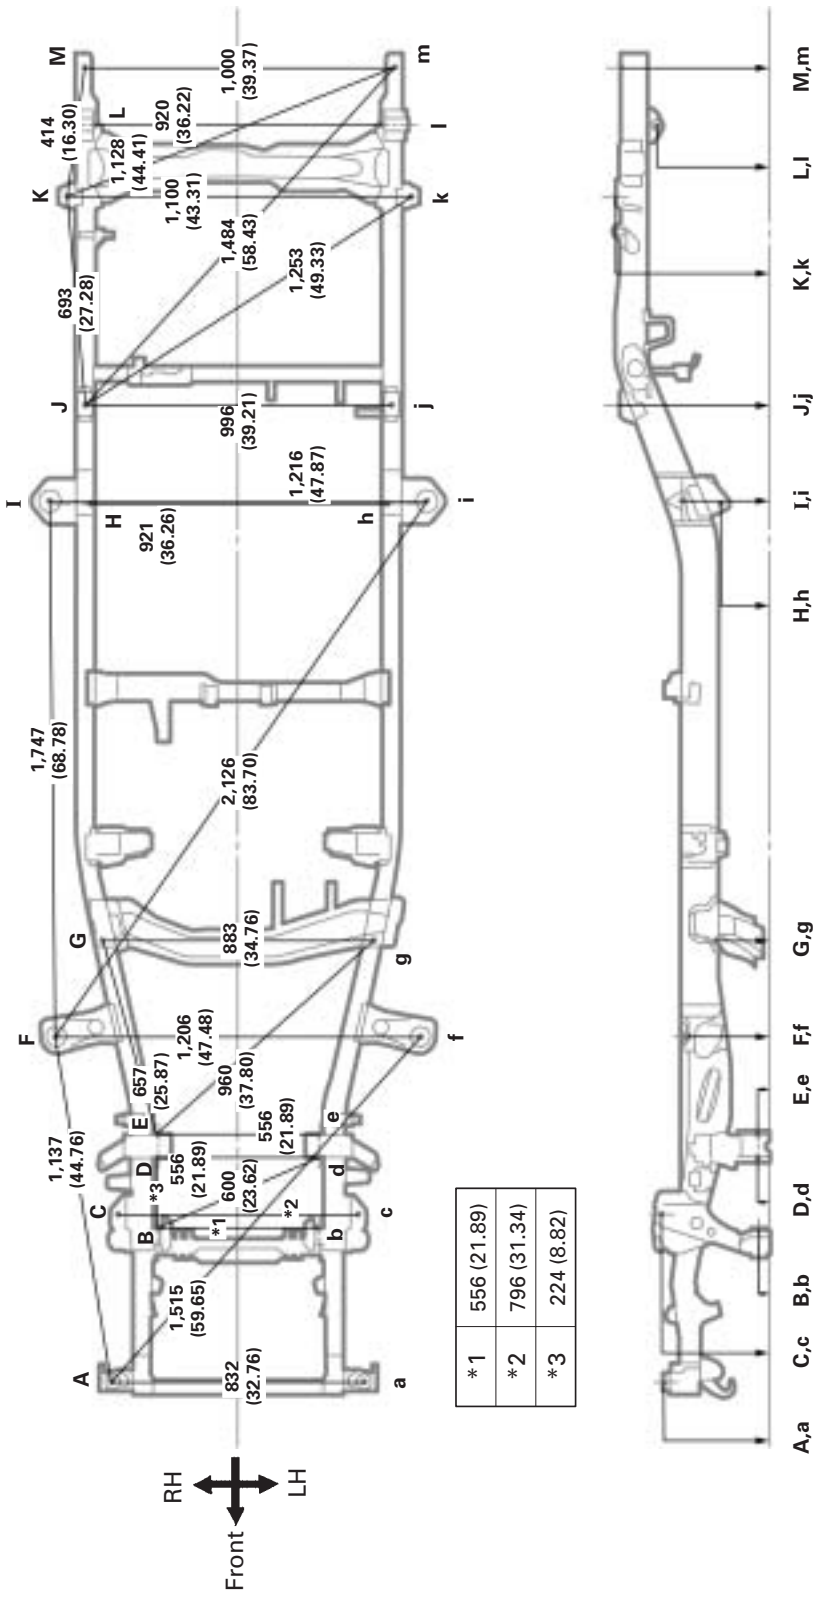


*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)
F, f	Body mounting hole	70 (2.76)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Rear spring front hanger hole-inner	14.3 (0.563)
I, i	Body mounting hole	70 (2.76)
J, j	Rear body mounting hole	17 (0.67)
K, k	Rear body mounting hole	22 (0.87)
L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
M, m	Rear body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION
4WD STYLE 2WD DOUBLE CAB (Cont'd)

(Two-Dimensional Distance)

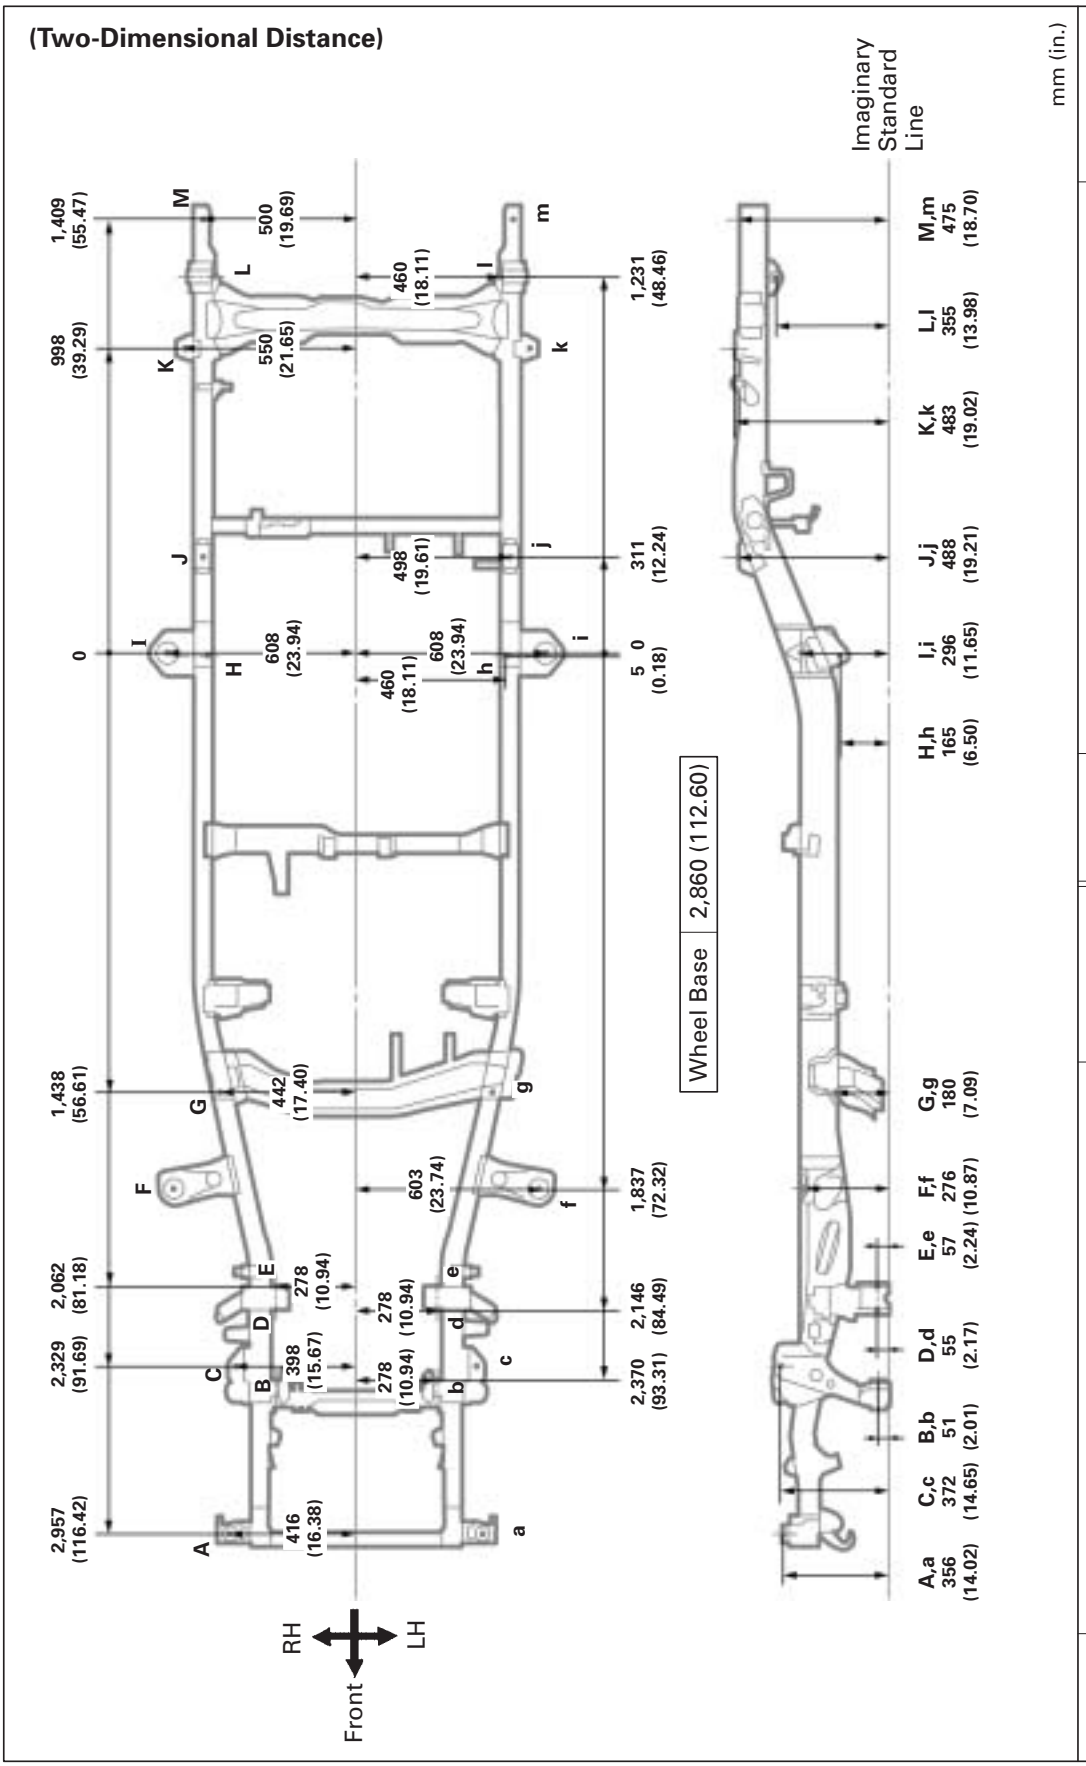

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	H, h	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Suspension lower arm installation hole-rear	35 × 17 (1.38 × 0.67)	I, i	Body mounting hole	70 (2.76)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Rear body mounting hole	17 (0.67)
D, d	Suspension lower arm installation hole-front	35 × 17 (1.38 × 0.67)	K, k	Rear body mounting hole	22 (0.87)
E, e	Suspension lower arm installation hole-rear	33 × 15 (1.30 × 0.59)	L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
F, f	Body mounting hole	70 (2.76)	M, m	Rear body mounting hole	18 × 21 (0.71 × 0.83)
G, g	Frame crossmember installation nut	12 (0.47) nut	—	—	—

FRAME DIMENSION

4WD REGULAR CAB (Except South Africa)

(Three-Dimensional Distance)

mm (in.)

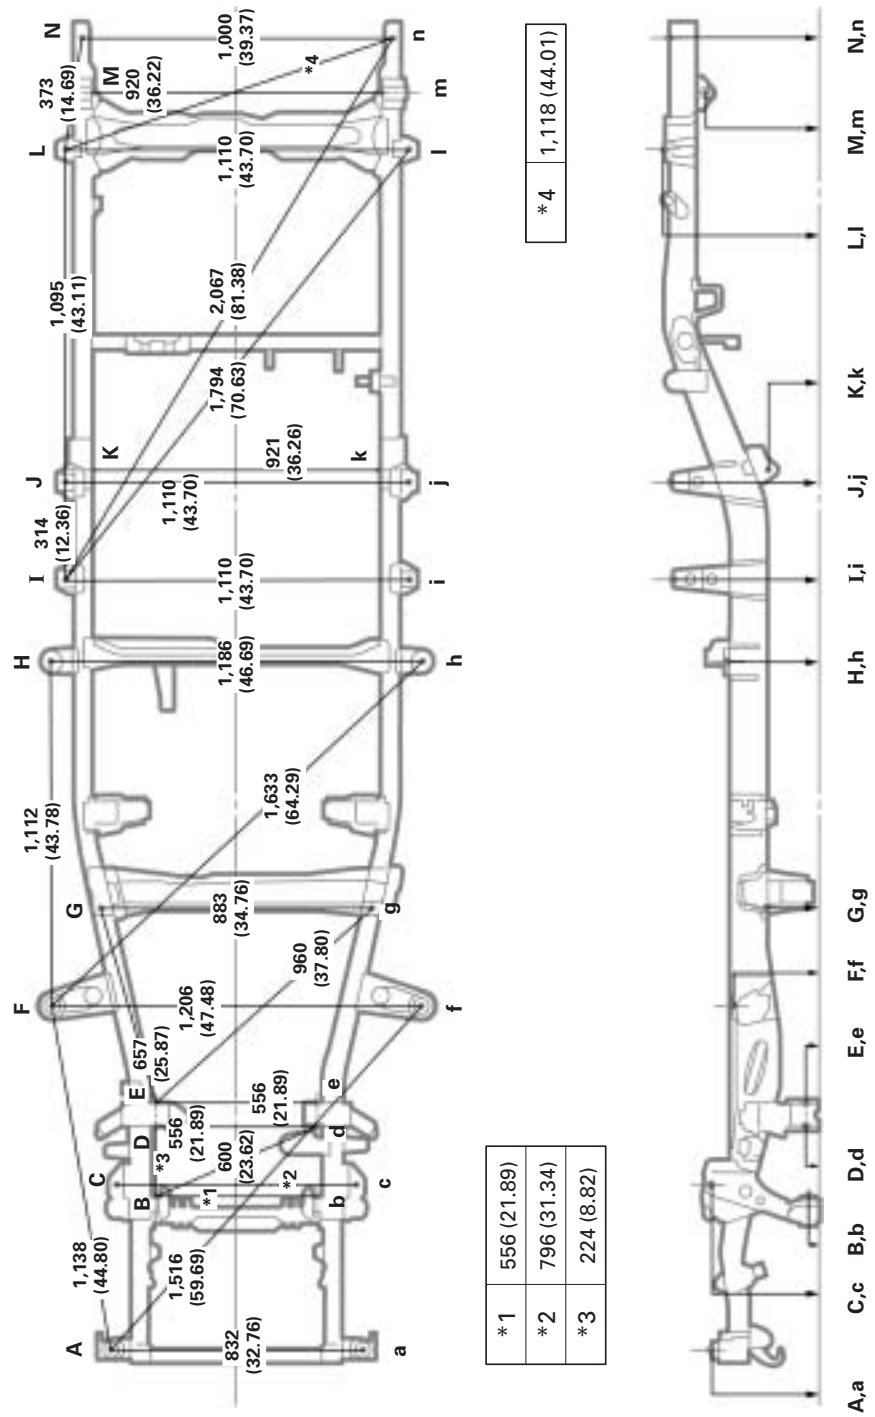

*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)

*4	1,118 (44.01)


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
F, f	Body mounting hole	24 (0.94)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Body mounting hole	28 (1.10)
I, i	Rear body mounting hole	22 (0.87)
J, j	Rear body mounting hole	22 (0.87)
K, k	Rear spring front hanger hole-inner	14.3 (0.563)
L, l	Rear body mounting hole	22 (0.87)
M, m	Rear spring rear hanger hole-inner	30.4 (1.197)
N, n	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

4WD REGULAR CAB (Except South Africa) (Cont'd)

(Two-Dimensional Distance)

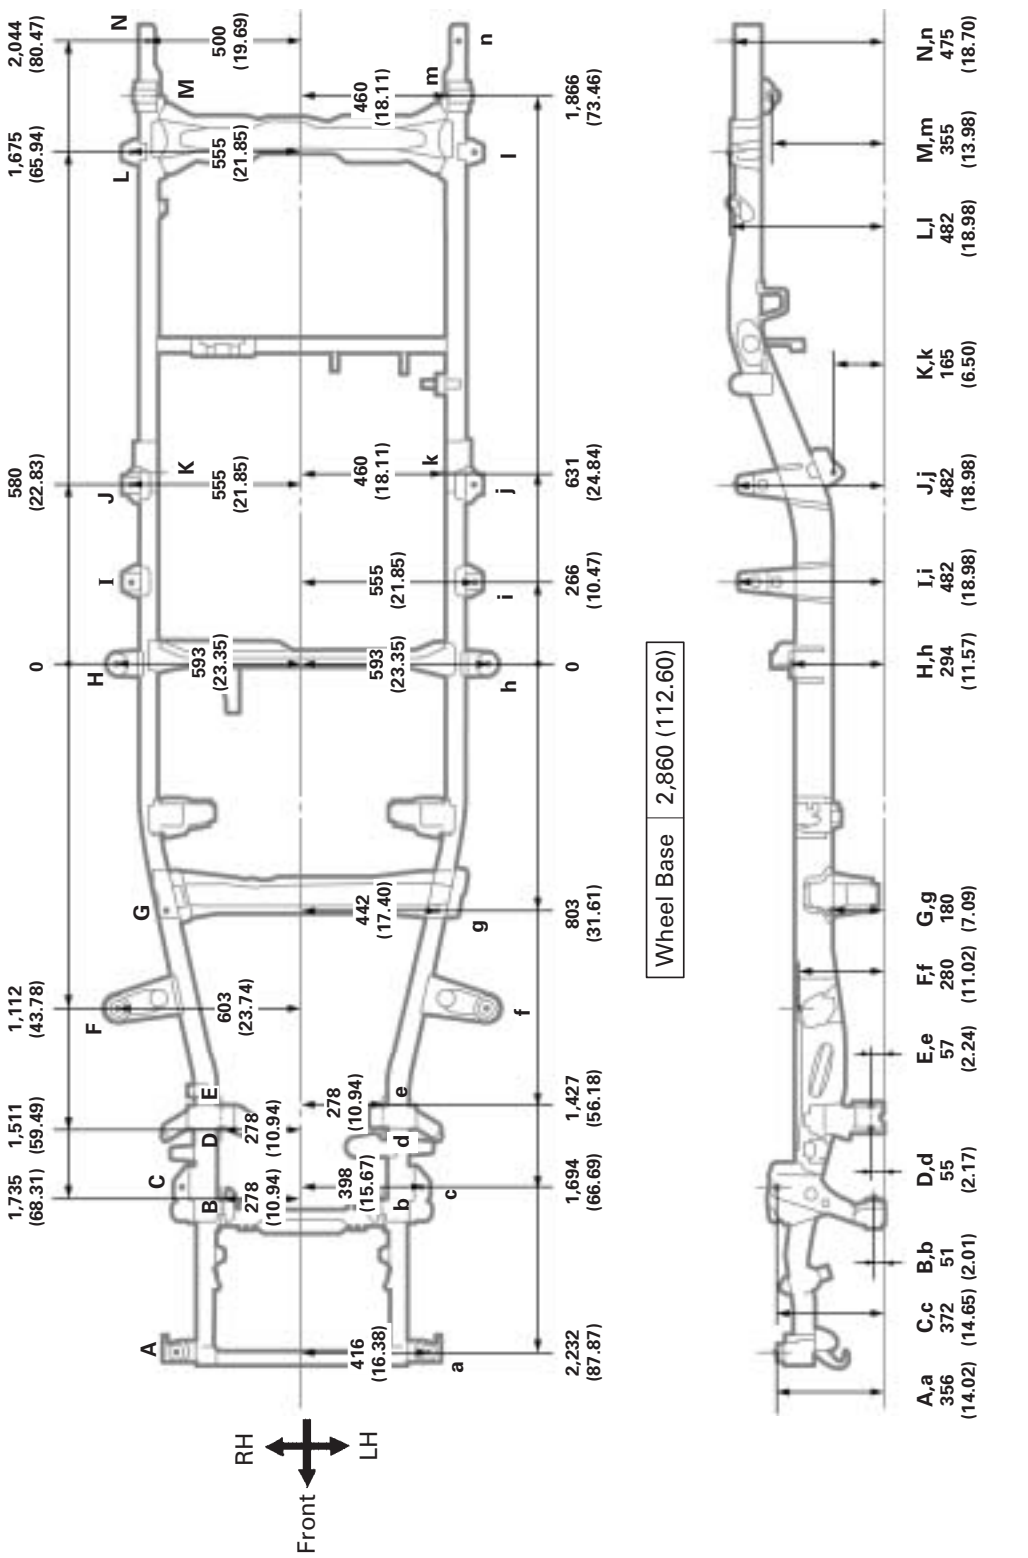


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	H, h	Body mounting hole	28 (1.10)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)	I, i	Rear body mounting hole	22 (0.87)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Rear body mounting hole	22 (0.87)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)	K, k	Rear spring front hanger hole-inner	14.3 (0.563)
E, e	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)	L, l	Rear body mounting hole	22 (0.87)
F, f	Body mounting hole	24 (0.94)	M, m	Rear spring rear hanger hole-inner	30.4 (1.197)
G, g	Frame crossmember installation nut	12 (0.47) nut	N, n	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

4WD REGULAR CAB (For South Africa)

(Three-Dimensional Distance)

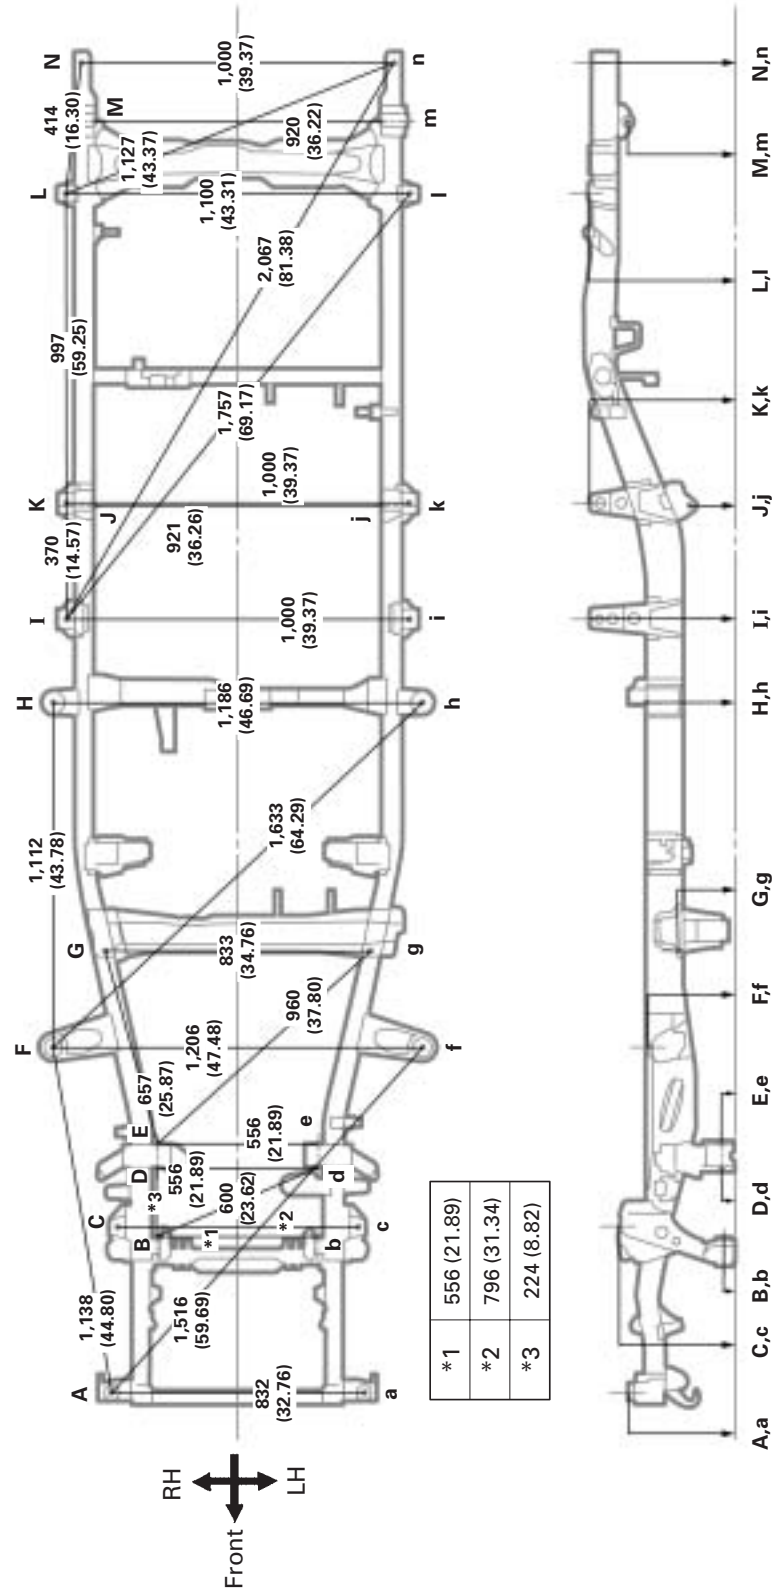

*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)

mm (in.)


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
F, f	Body mounting hole	24 (0.94)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Body mounting hole	28 (1.10)
I, i	Rear body mounting hole	17 (0.67)
J, j	Rear spring front hanger hole-inner	14.3 (0.563)
K, k	Rear body mounting hole	17 (0.67)
L, l	Rear body mounting hole	17 (0.67)
M, m	Rear spring rear hanger hole-inner	30.4 (1.197)
N, n	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

4WD REGULAR CAB (For South Africa) (Cont'd)

(Two-Dimensional Distance)

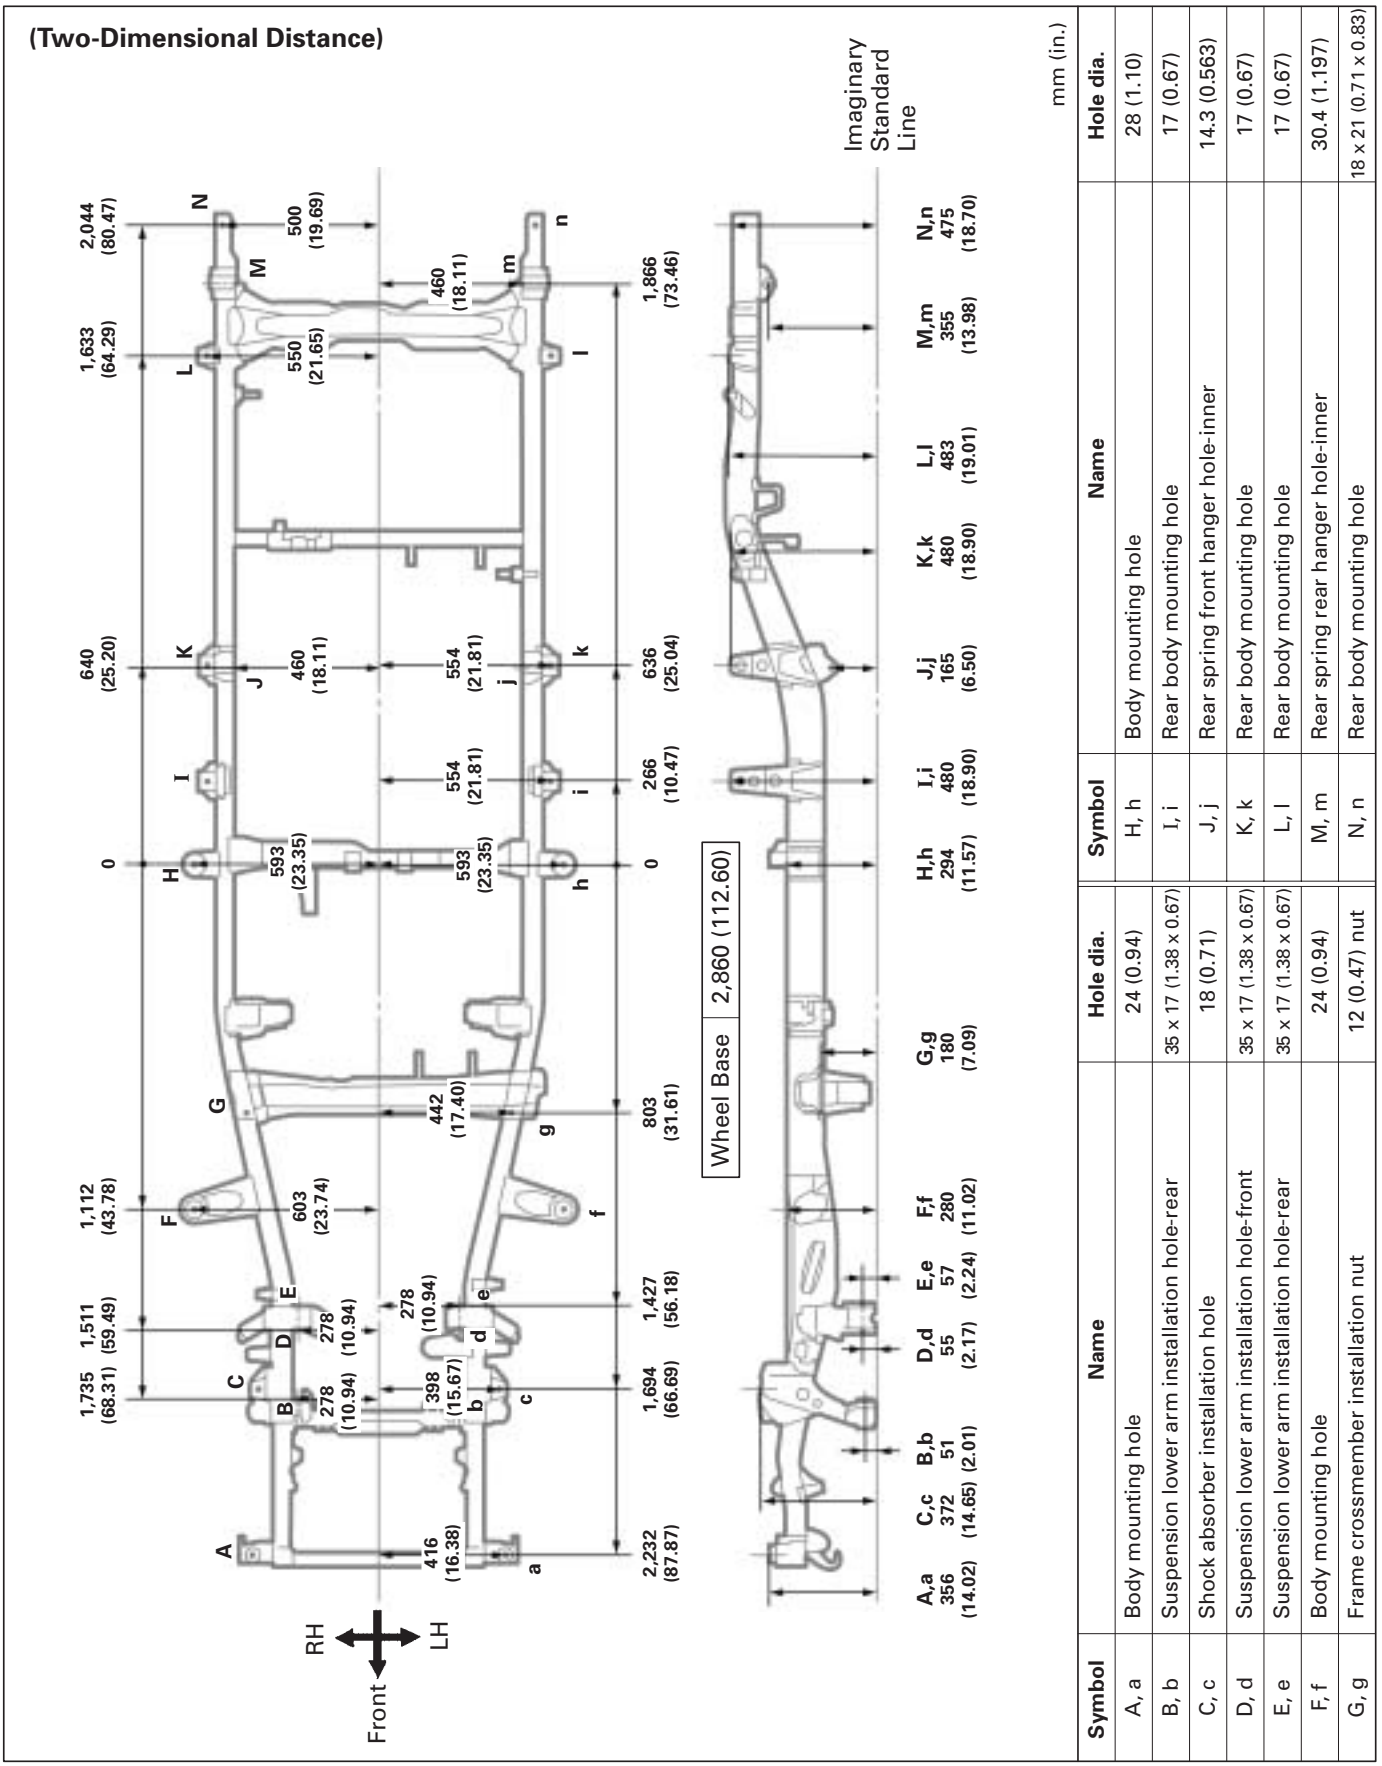

mm (in.)

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
F, f	Body mounting hole	24 (0.94)
G, g	Frame crossmember installation nut	12 (0.47) nut


Symbol	Name	Hole dia.
H, h	Body mounting hole	28 (1.10)
I, i	Rear body mounting hole	17 (0.67)
J, j	Rear spring front hanger hole-inner	14.3 (0.563)
K, k	Rear body mounting hole	17 (0.67)
L, l	Rear body mounting hole	17 (0.67)
M, m	Rear spring rear hanger hole-inner	30.4 (1.197)
N, n	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

4WD DOUBLE CAB (Except South Africa)

(Three-Dimensional Distance)

mm (in.)

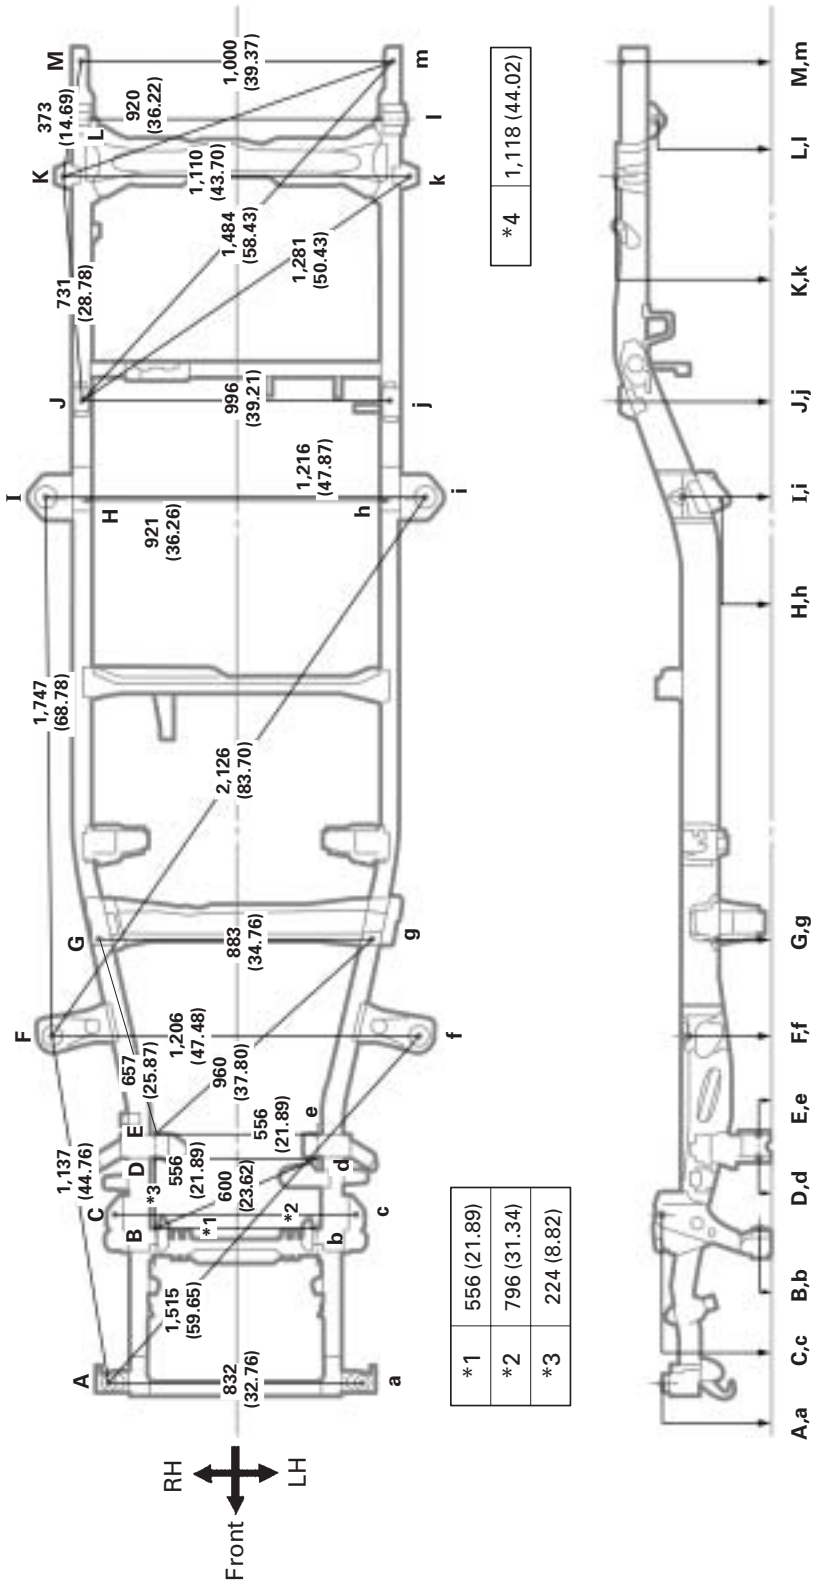


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)
F, f	Body mounting hole	70 (2.76)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Rear spring front hanger hole-inner	14.3 (0.563)
I, i	Body mounting hole	70 (2.76)
J, j	Rear body mounting hole	13 (0.51)
K, k	Rear body mounting hole	22 (0.87)
L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
M, m	Rear body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION

4WD DOUBLE CAB (Except South Africa) (Cont'd)

(Two-Dimensional Distance)

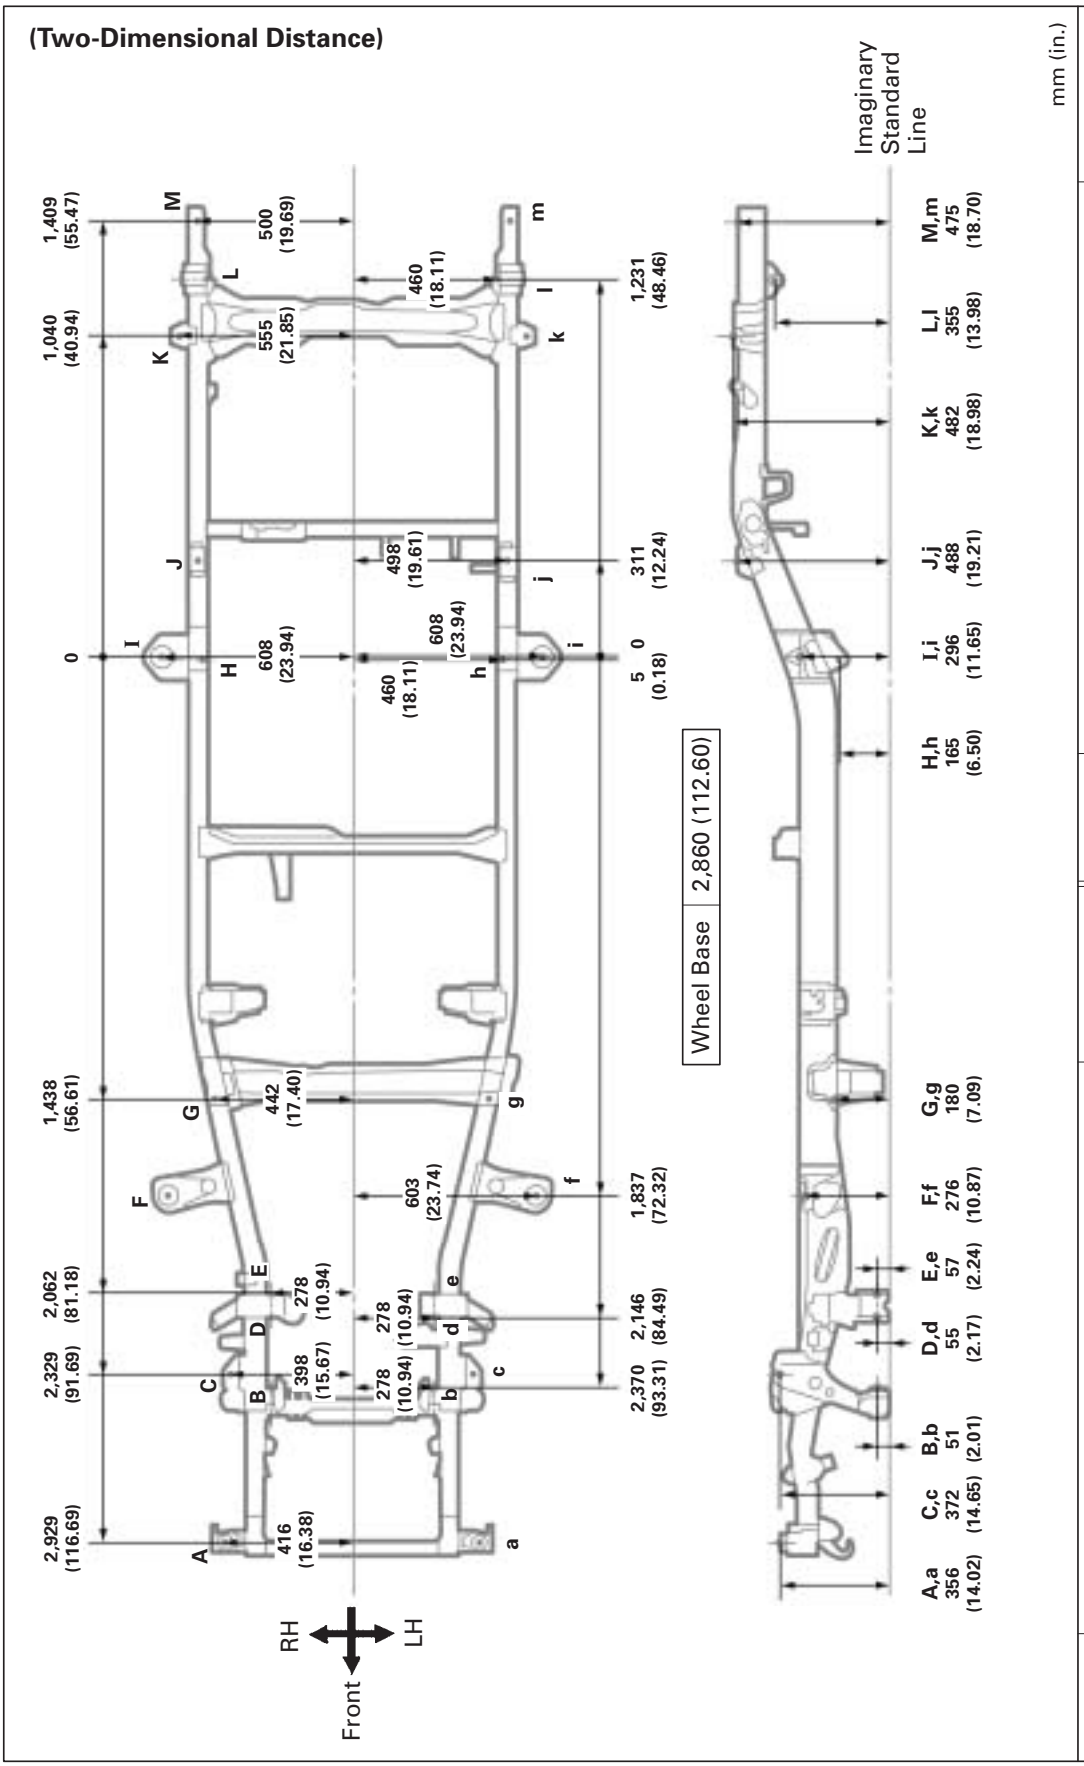


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	H, h	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Suspension lower arm installation hole-rear	35 × 17 (1.38 × 0.67)	I, i	Body mounting hole	70 (2.76)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Rear body mounting hole	13 (0.51)
D, d	Suspension lower arm installation hole-front	35 × 17 (1.38 × 0.67)	K, k	Rear body mounting hole	22 (0.87)
E, e	Suspension lower arm installation hole-rear	33 × 15 (1.30 × 0.59)	L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
F, f	Body mounting hole	70 (2.76)	M, m	Rear body mounting hole	18 × 21 (0.71 × 0.83)
G, g	Frame crossmember installation nut	12 (0.47) nut	—	—	—

FRAME DIMENSION

4WD DOUBLE CAB (For South Africa)

(Three-Dimensional Distance)

mm (in.)

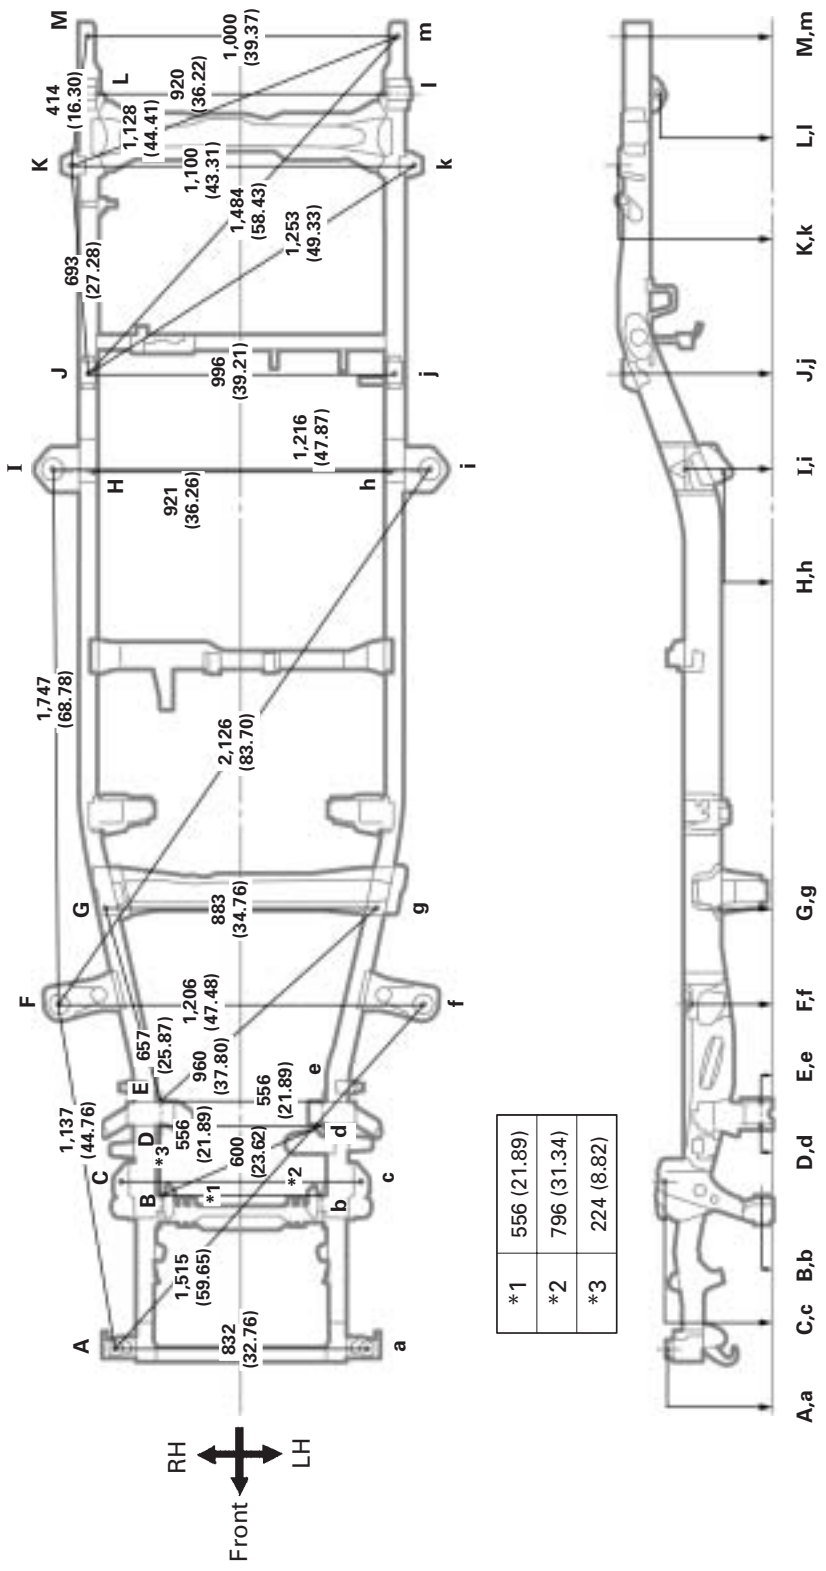


*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	H, h	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)	I, i	Body mounting hole	70 (2.76)
C, c	Shock absoeber installation hole	18 (0.71)	J, j	Rear body mounting hole	17 (0.67)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)	K, k	Rear body mounting hole	22 (0.87)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)	L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
F, f	Body mounting hole	70 (2.76)	M, m	Rear body mounting hole	18 x 21 (0.71 x 0.83)
G, g	Frame crossmember installation nut	12 (0.47) nut	—	—	—

FRAME DIMENSION

4WD DOUBLE CAB (For South Africa) (Cont'd)

(Two-Dimensional Distance)

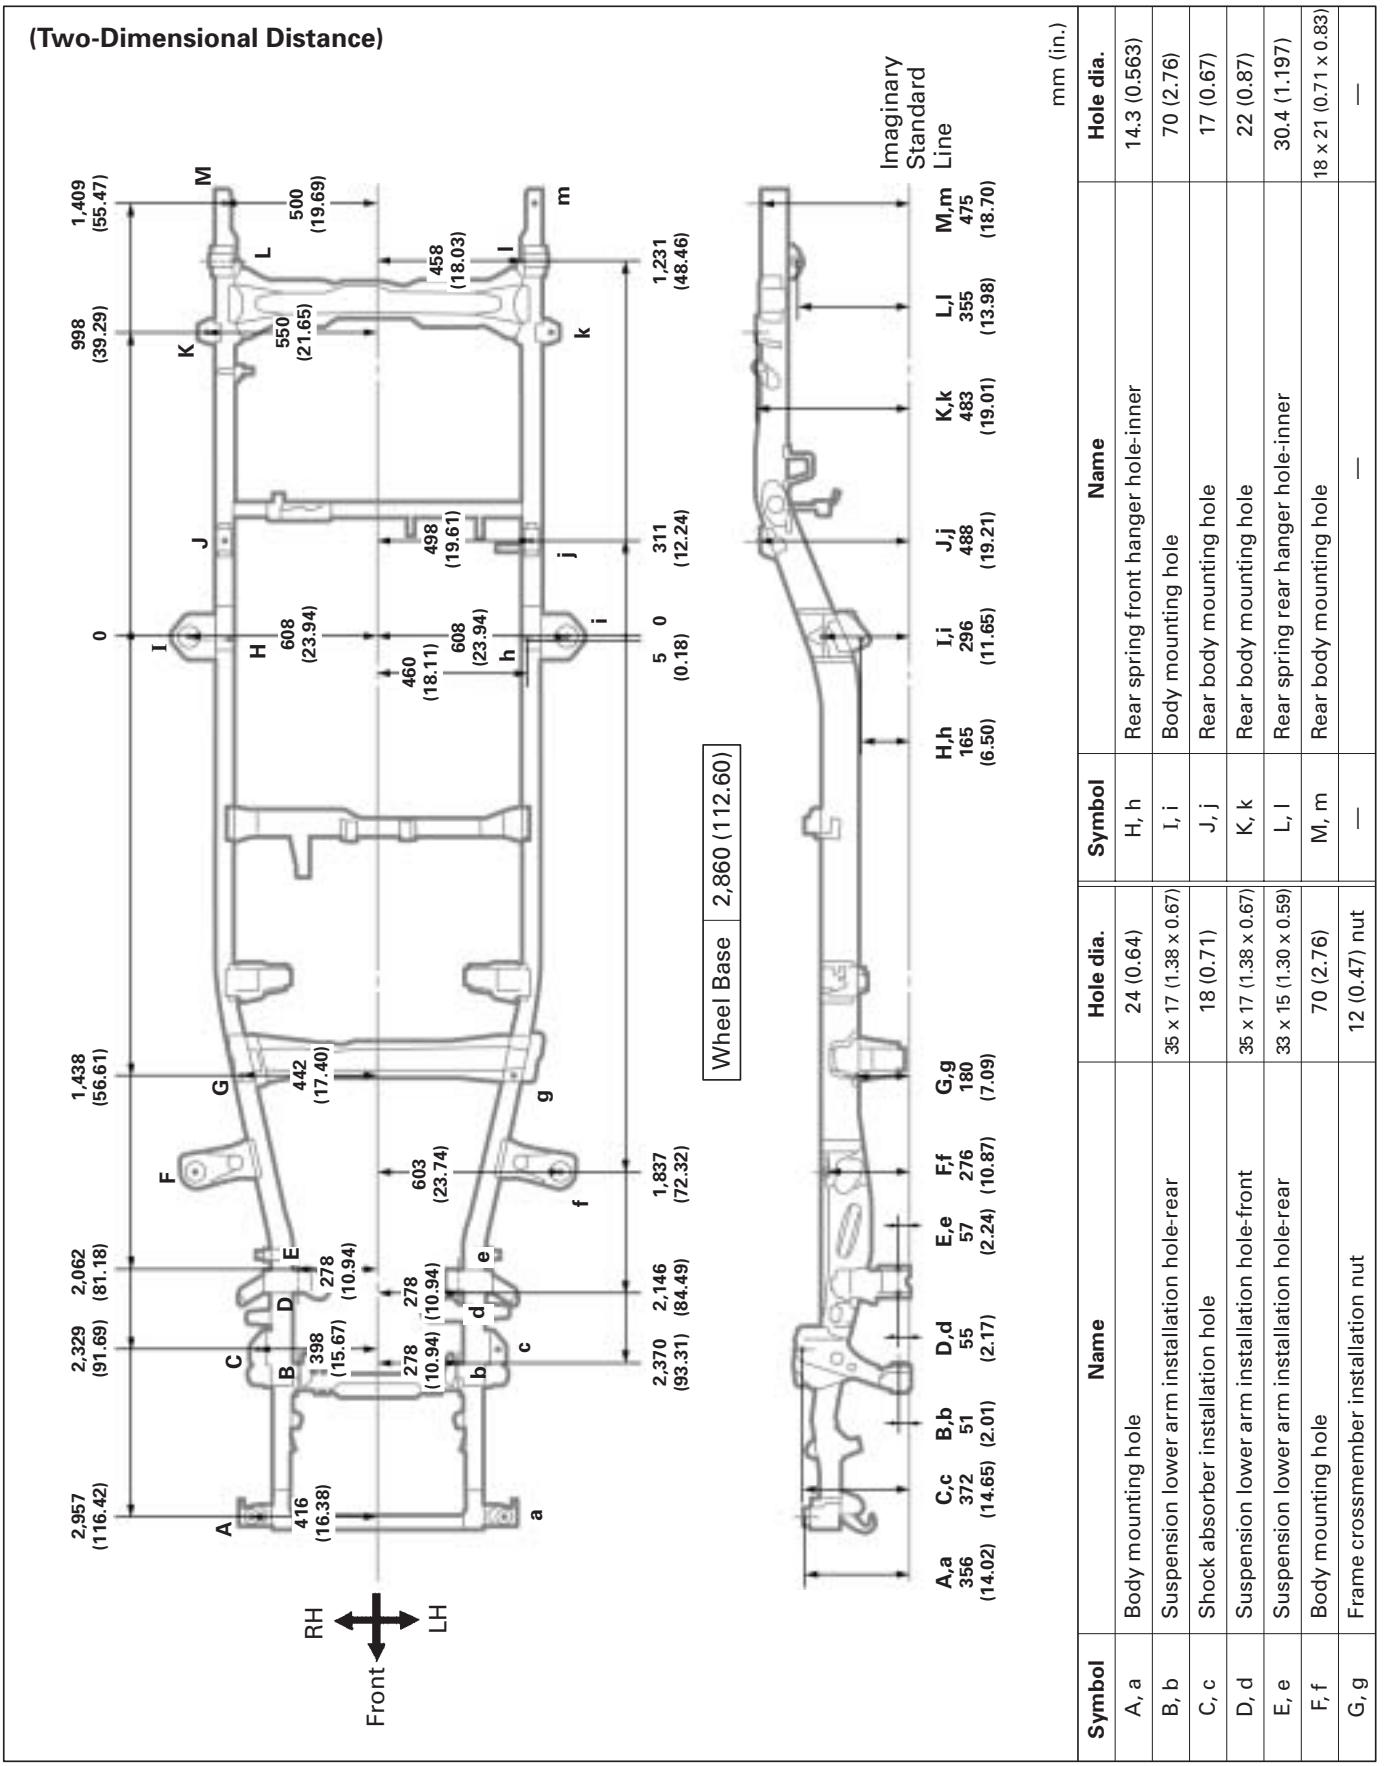


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.64)	H, h	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Suspension lower arm installation hole-rear	35 × 17 (1.38 × 0.67)	I, i	Body mounting hole	70 (2.76)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Rear body mounting hole	17 (0.67)
D, d	Suspension lower arm installation hole-front	35 × 17 (1.38 × 0.67)	K, k	Rear body mounting hole	22 (0.87)
E, e	Suspension lower arm installation hole-rear	33 × 15 (1.30 × 0.59)	L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
F, f	Body mounting hole	70 (2.76)	M, m	Rear body mounting hole	18 × 21 (0.71 × 0.83)
G, g	Frame crossmember installation nut	12 (0.47) nut	—	—	—

FRAME DIMENSION – Upper Face
2WD SHORT WHEEL BASE MODELS

(Three-Dimensional Distance)

mm (in.)

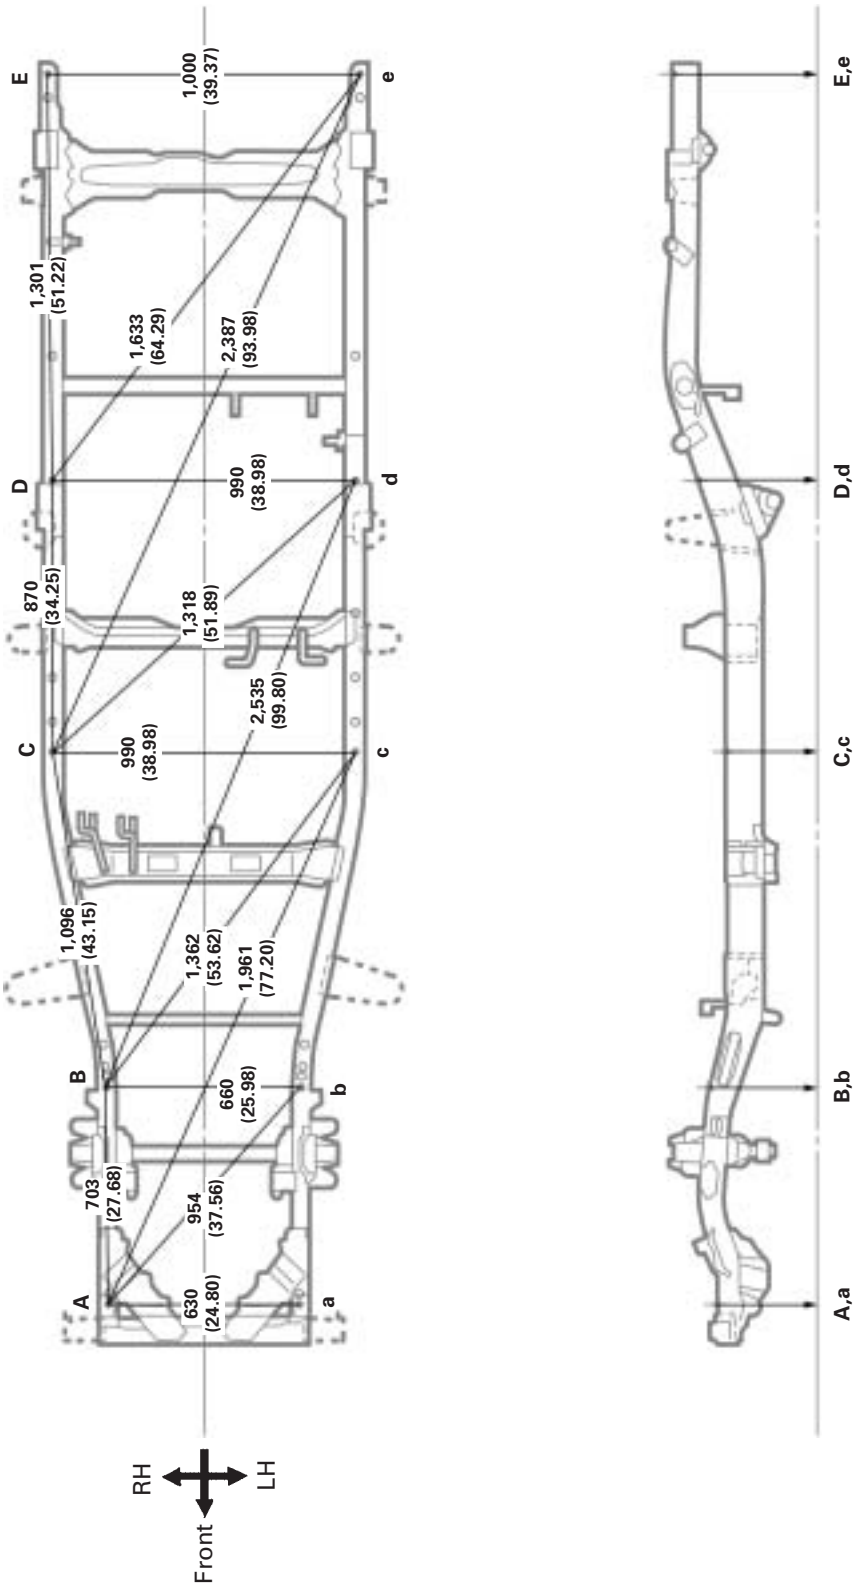


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Rear body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION – Upper Face
2WD SHORT WHEEL BASE MODELS (Cont'd)

(Two-Dimensional Distance)

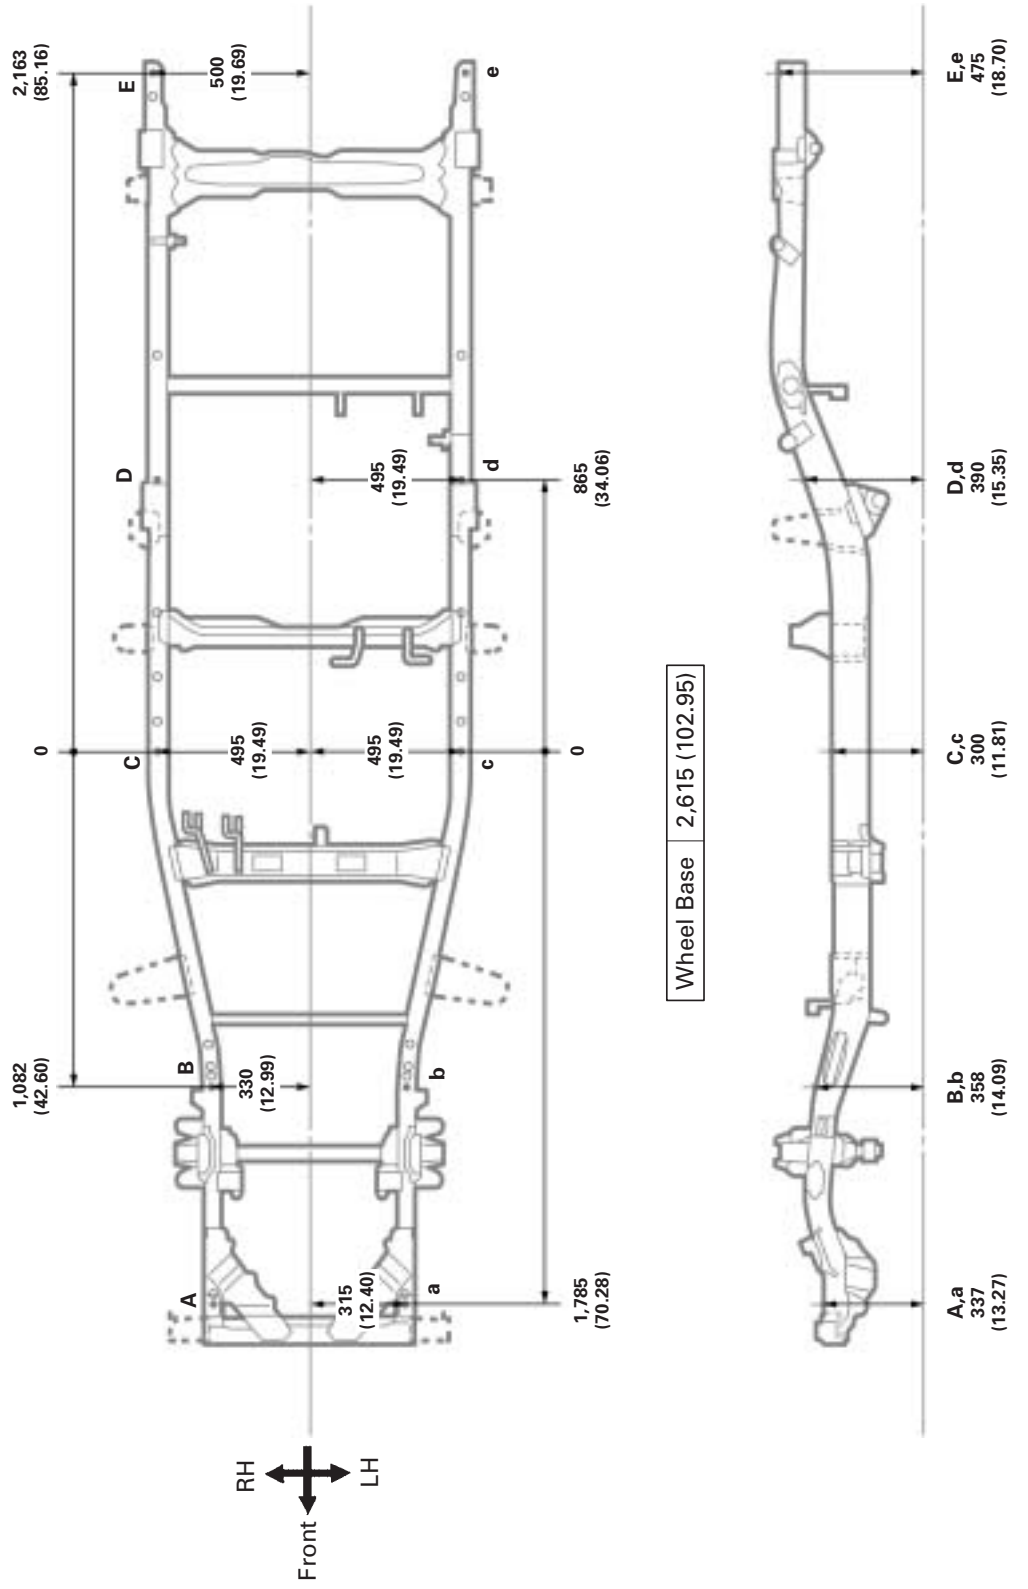

mm (in.)


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Rear body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION – Lower Face
2WD SHORT WHEEL BASE MODELS

(Three-Dimensional Distance)

mm (in.)

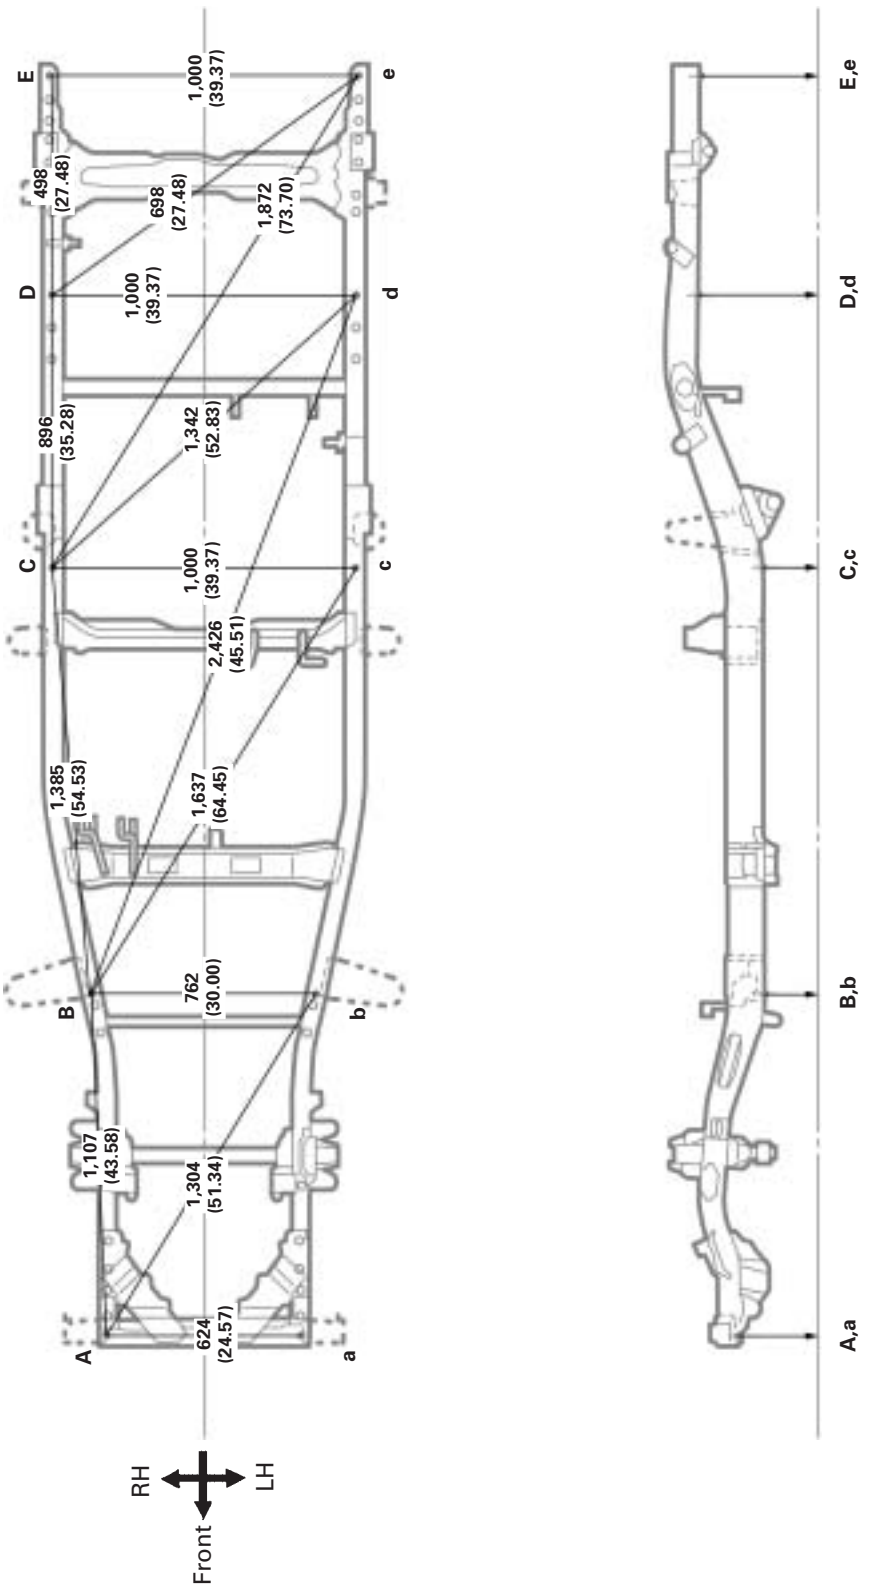



Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Rear body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Lower Face
2WD SHORT WHEEL BASE MODELS (Cont'd)

(Two-Dimensional Distance)

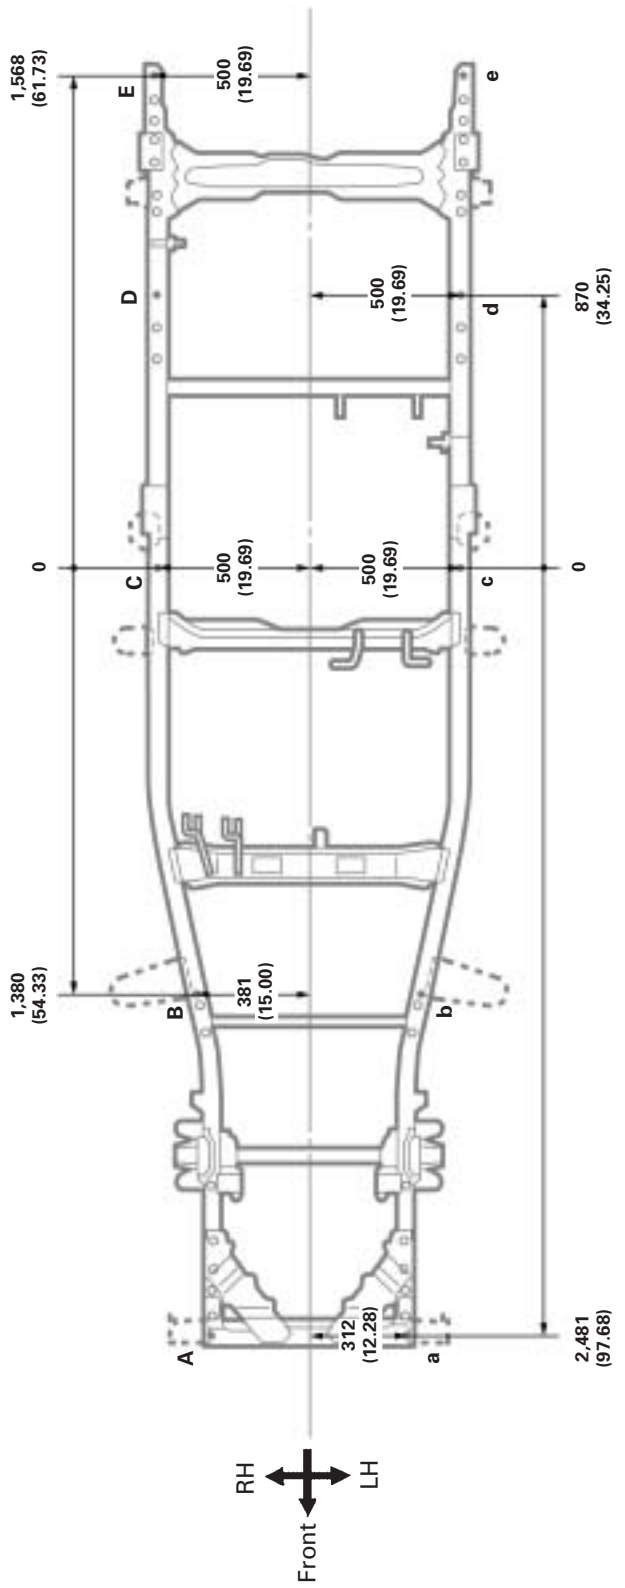

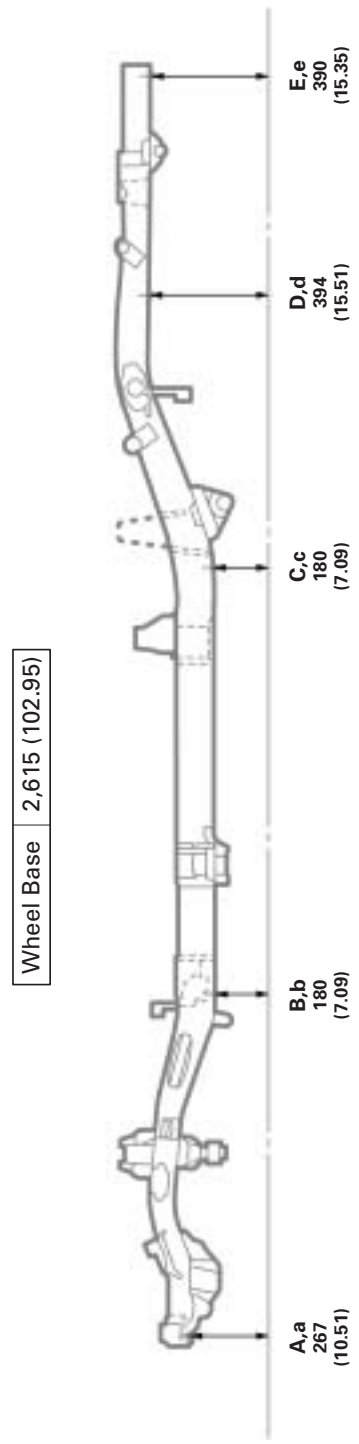

Wheel Base | 2,615 (102.95)

mm (in.)


Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Rear body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Upper Face
2WD LONG WHEEL BASE MODELS

(Three-Dimensional Distance)

mm (in.)

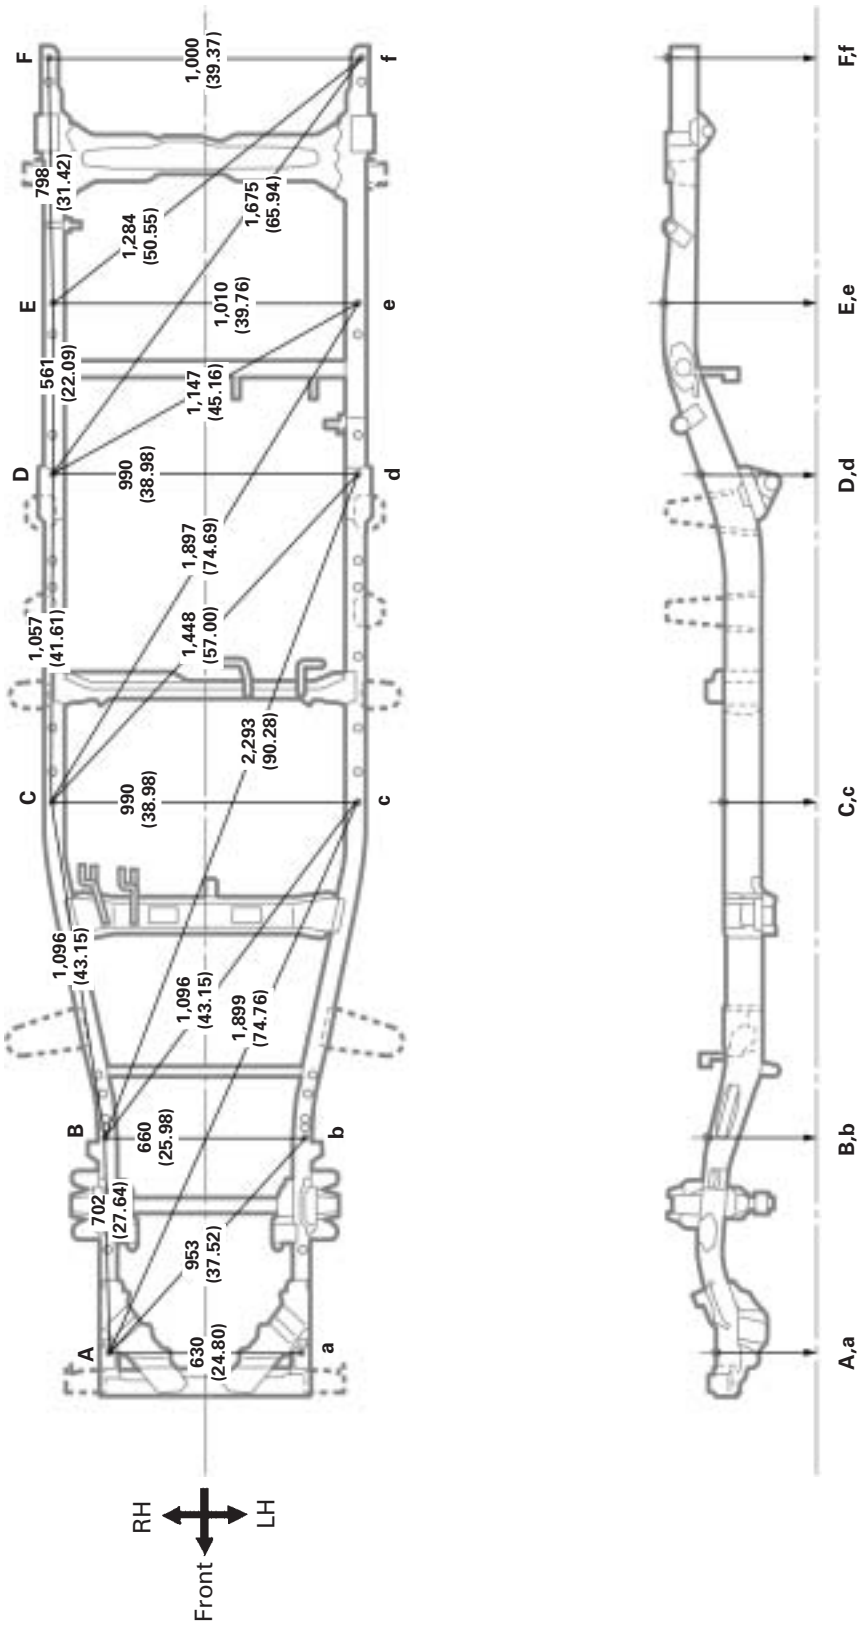


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexble hose brackt installation nut	8 (0.31) nut
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Upper Face
2WD LONG WHEEL BASE MODELS (Cont'd)

(Two-Dimensional Distance)

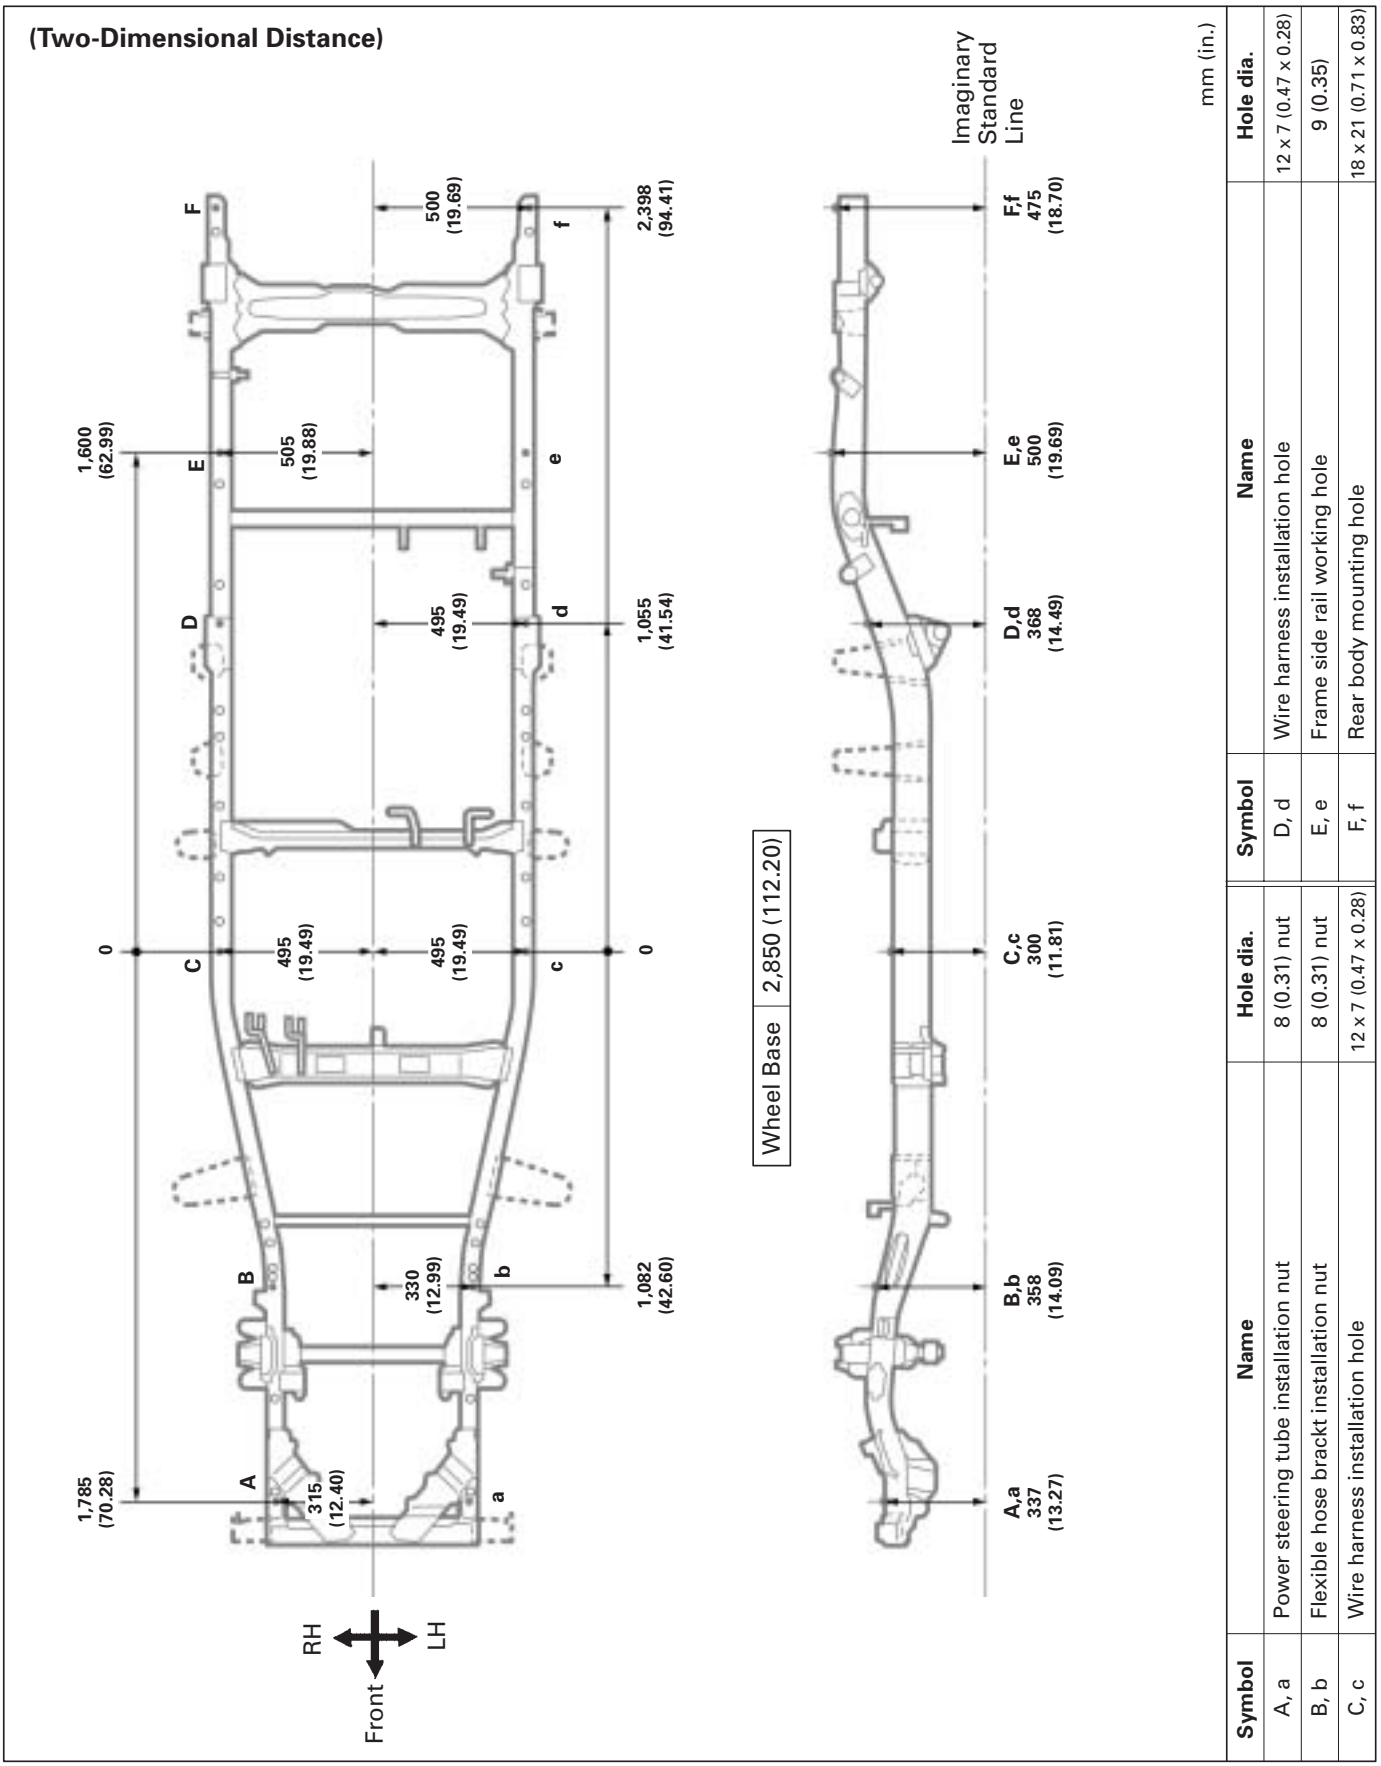


mm (in.)

Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose brackt installation nut	8 (0.31) nut
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Lower Face
2WD LONG WHEEL BASE MODELS

(Three-Dimensional Distance)

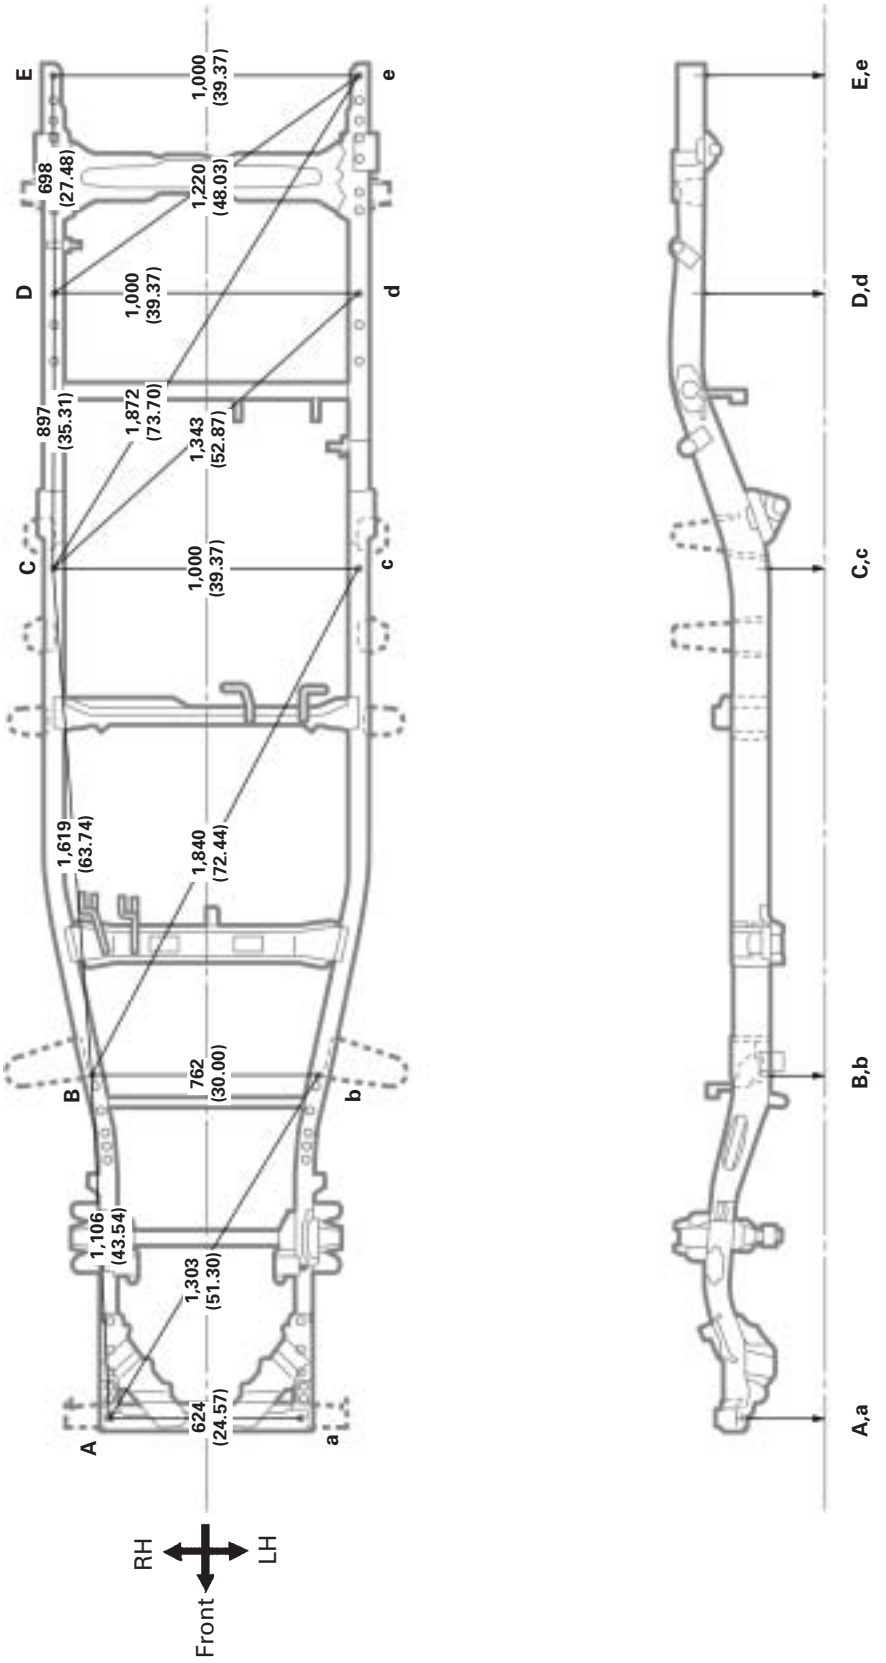


mm (in.)

Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Rear body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Lower Face
2WD LONG WHEEL BASE MODELS (Cont'd)

(Two-Dimensional Distance)

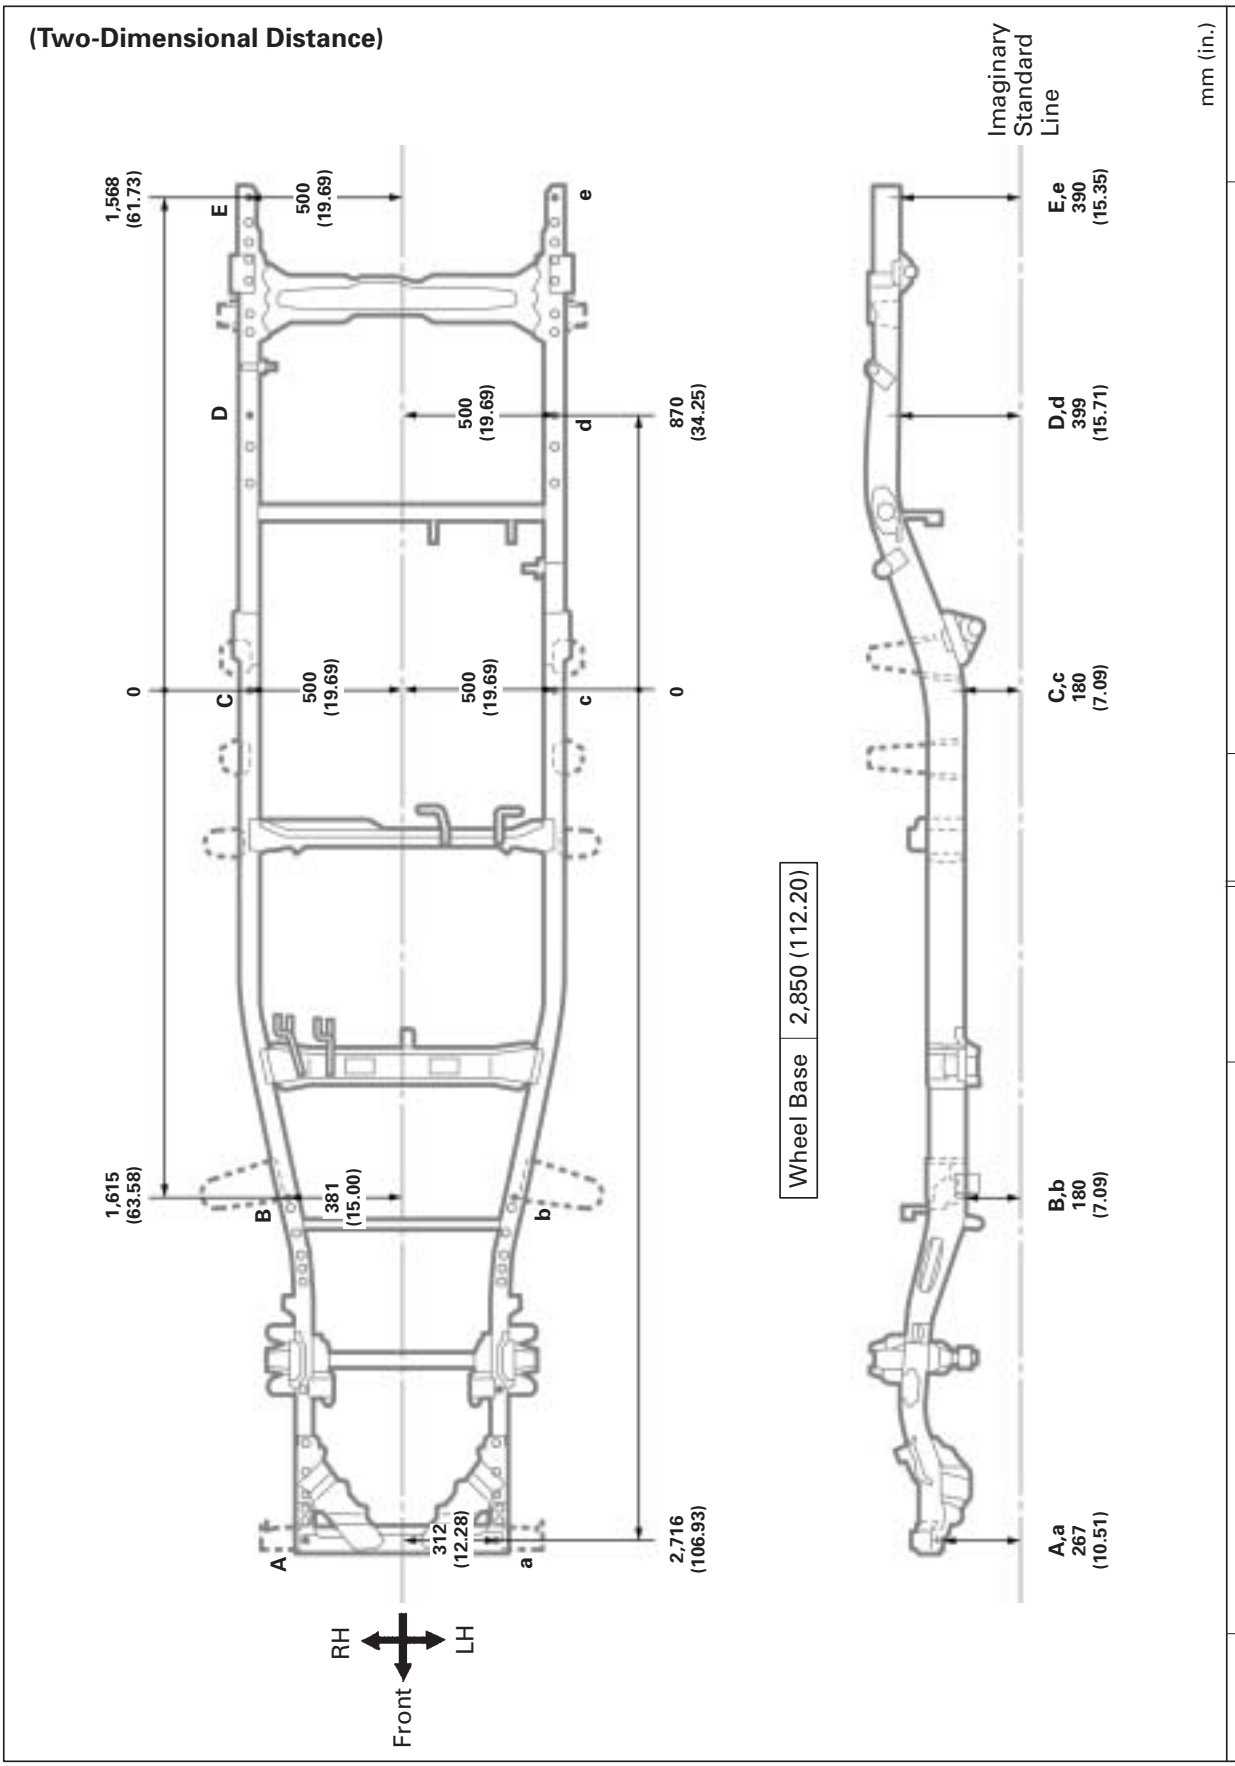


Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Rear body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Upper Face
2WD SUPER LONG WHEEL BASE MODELS

(Three-Dimensional Distance)

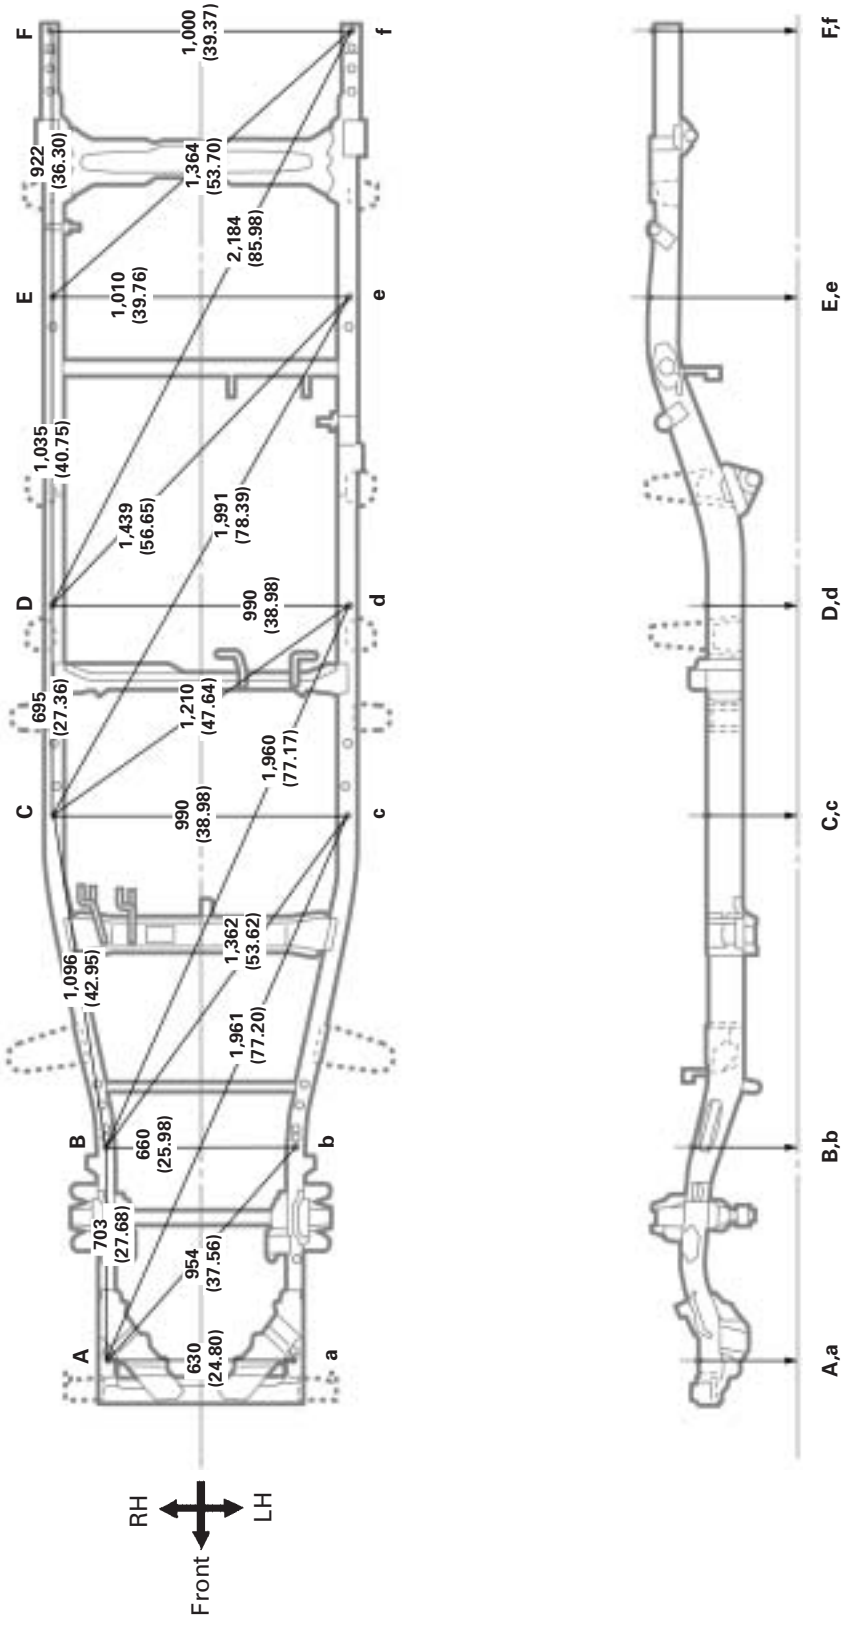


mm (in.)


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	7 (0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Upper Face
2WD SUPER LONG WHEEL BASE MODELS (Cont'd)

(Two-Dimensional Distance)

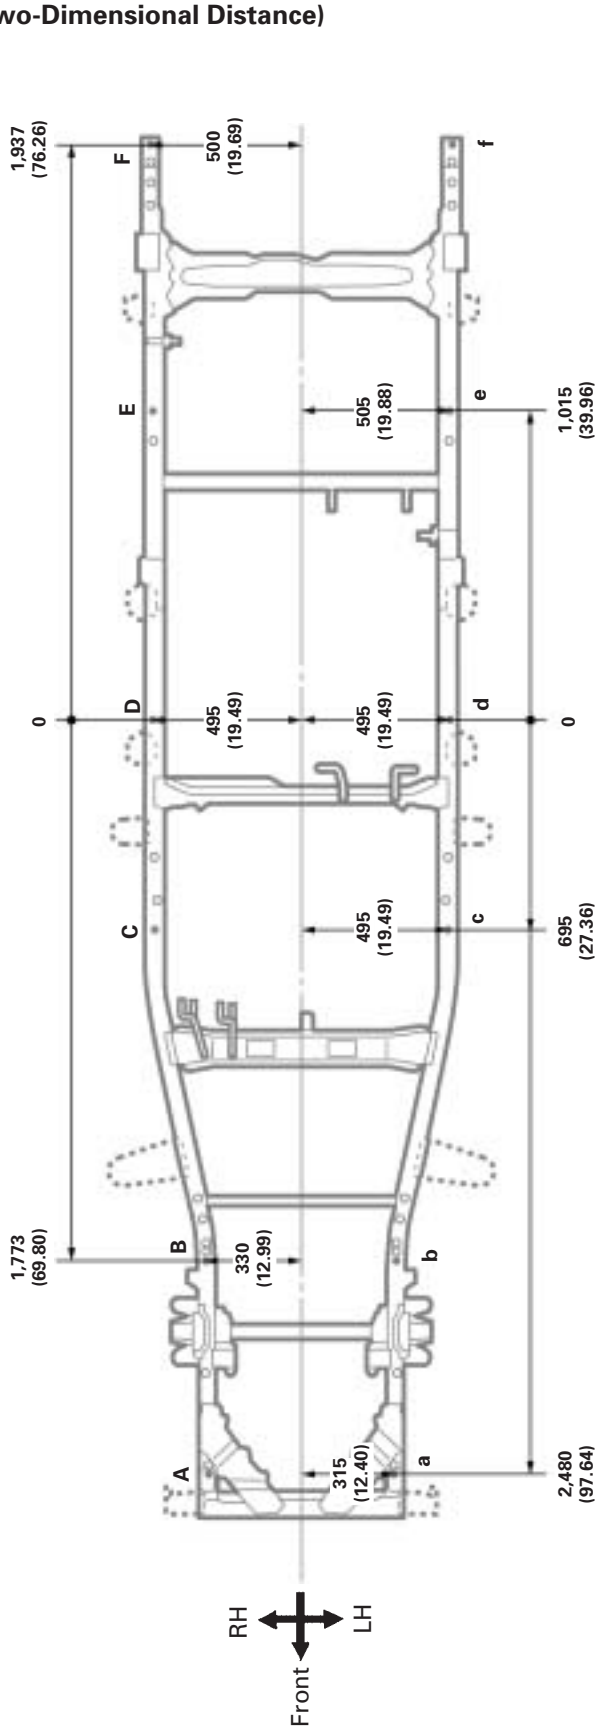

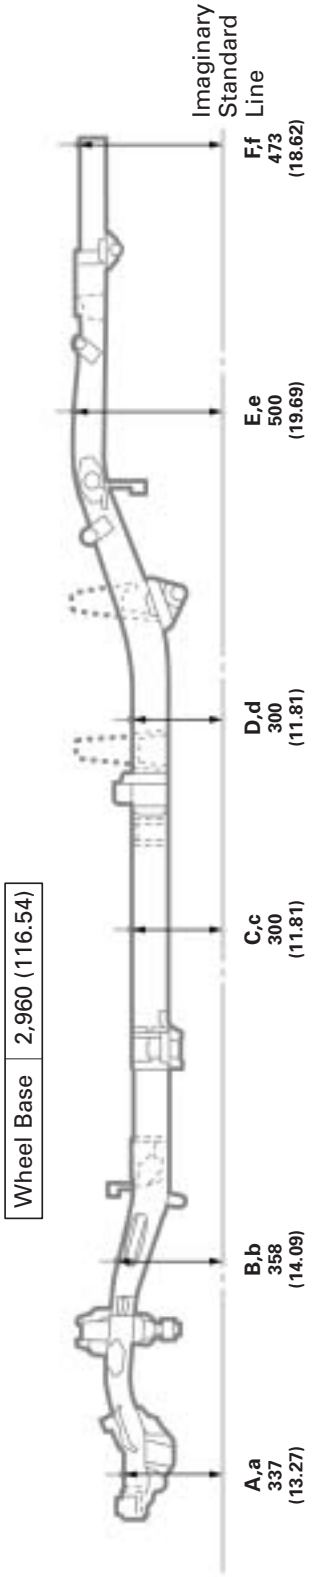

Wheel Base	2,960 (116.54)


mm (in.)

Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	7 (0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Lower Face
2WD SUPER LONG WHEEL BASE MODELS

(Three-Dimensional Distance)

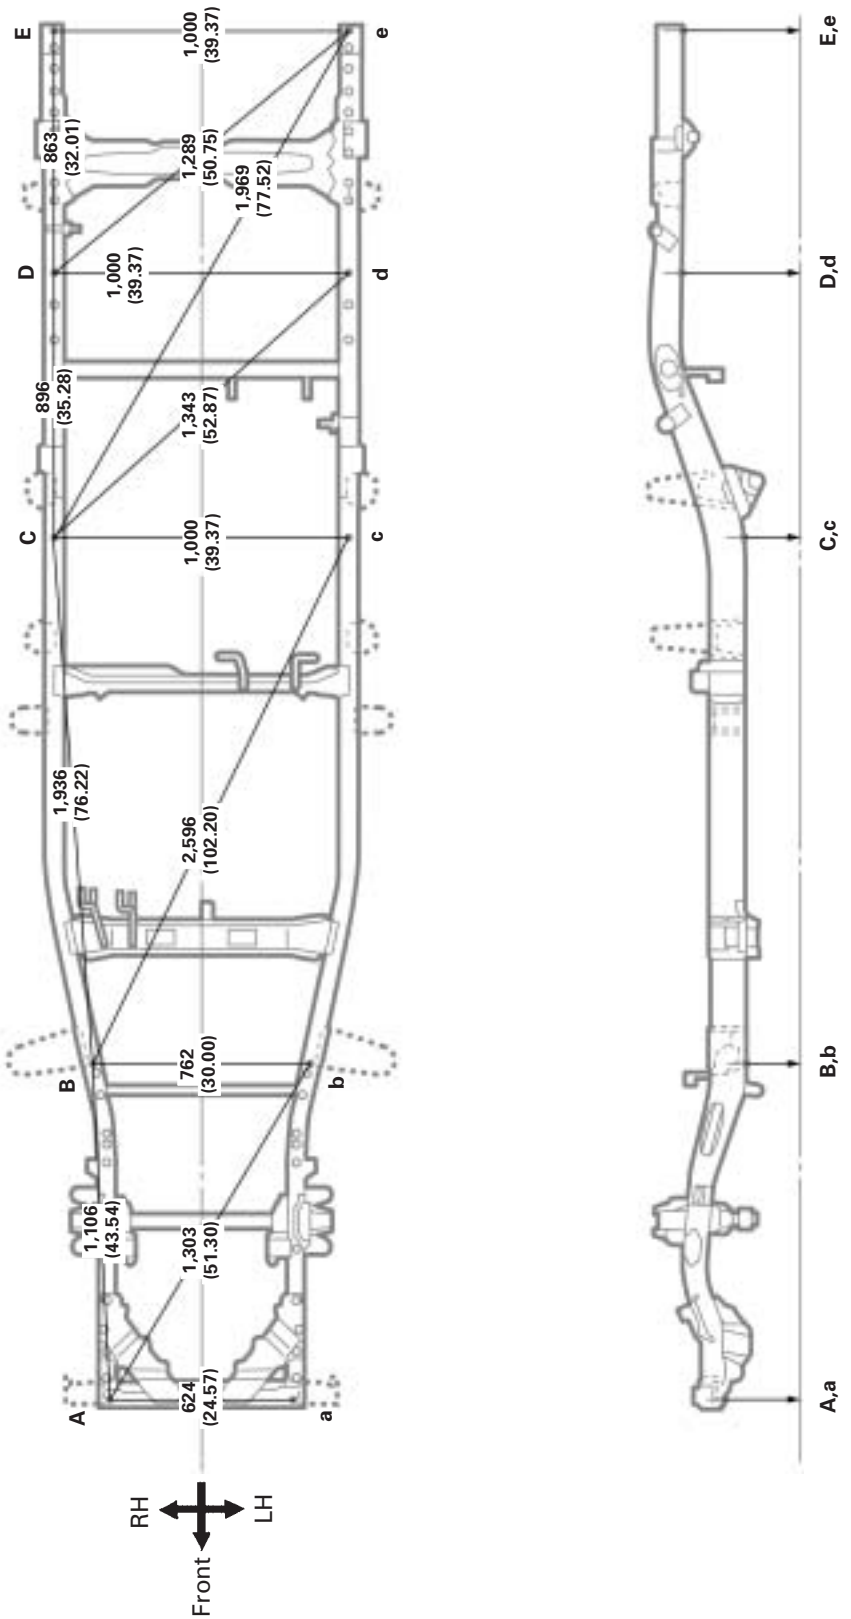


mm (in.)

Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Rear body mounting hole	28 x 31 (0.71 x 0.83)
—	—	—

FRAME DIMENSION – Lower Face
2WD SUPER LONG WHEEL BASE MODELS (Cont'd)

(Two-Dimensional Distance)

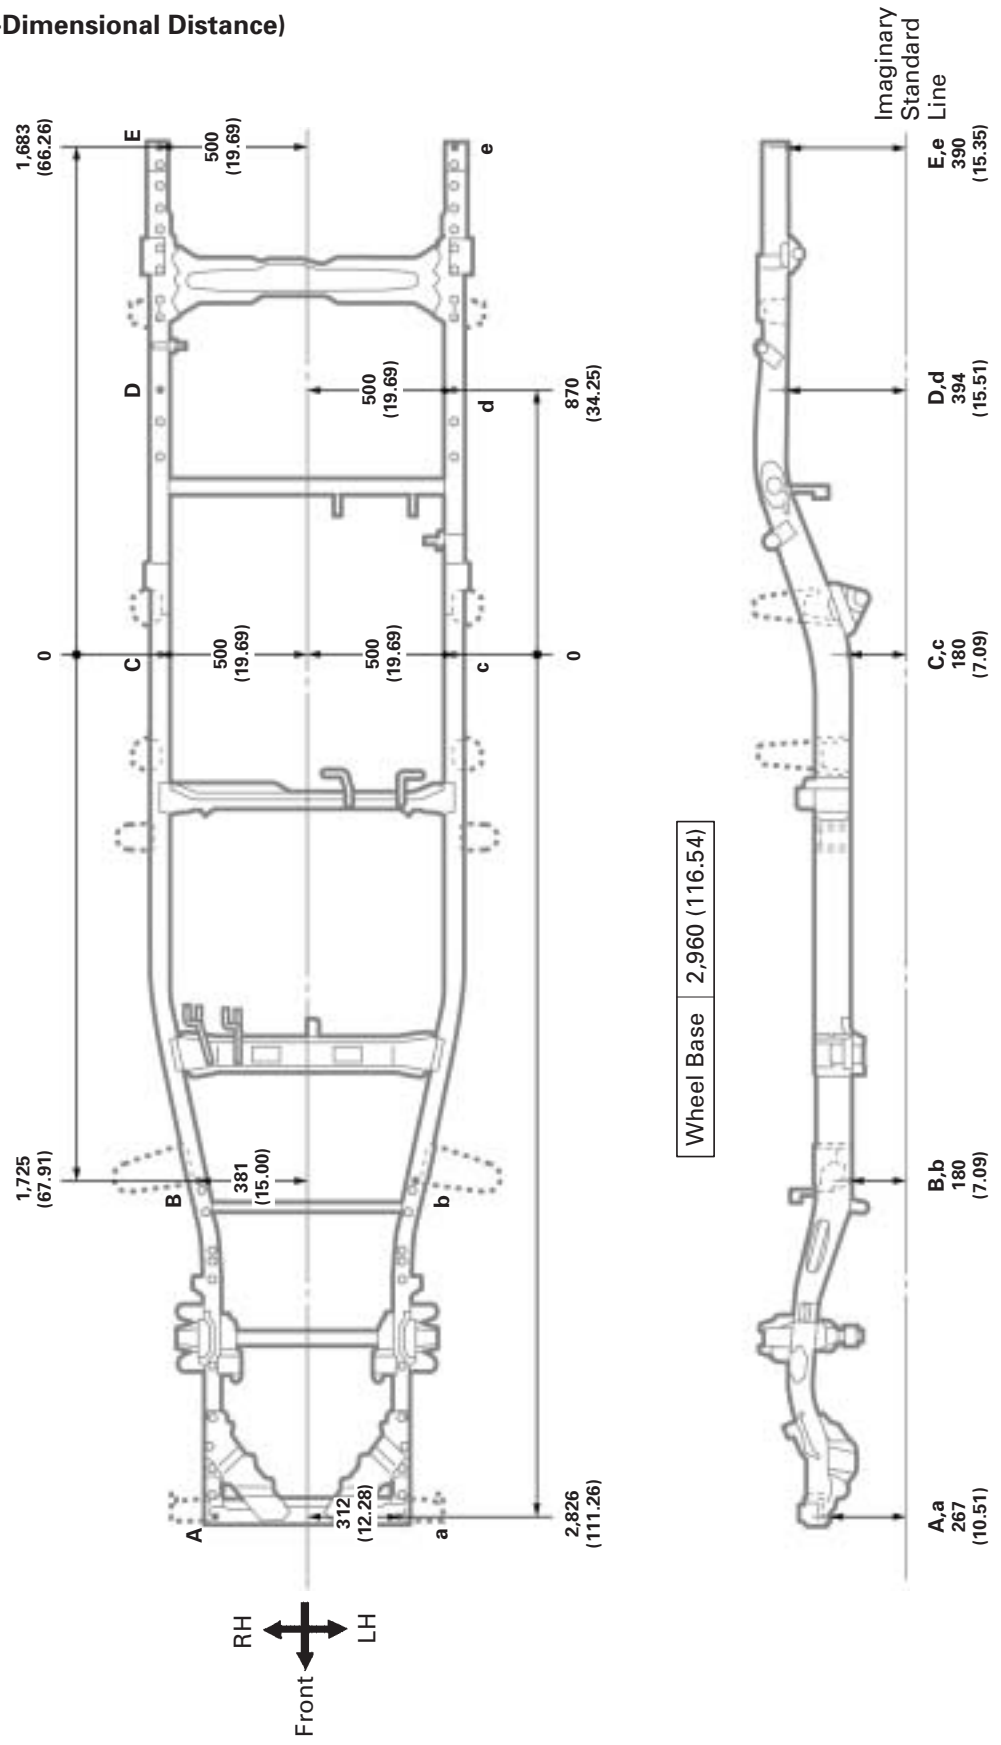

mm (in.)


Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Rear body mounting hole	28 x 31 (0.71 x 0.83)
—	—	—

FRAME DIMENSION – Upper Face
4WD & 4WD STYLE 2WD

(Three-Dimensional Distance)

mm (in.)

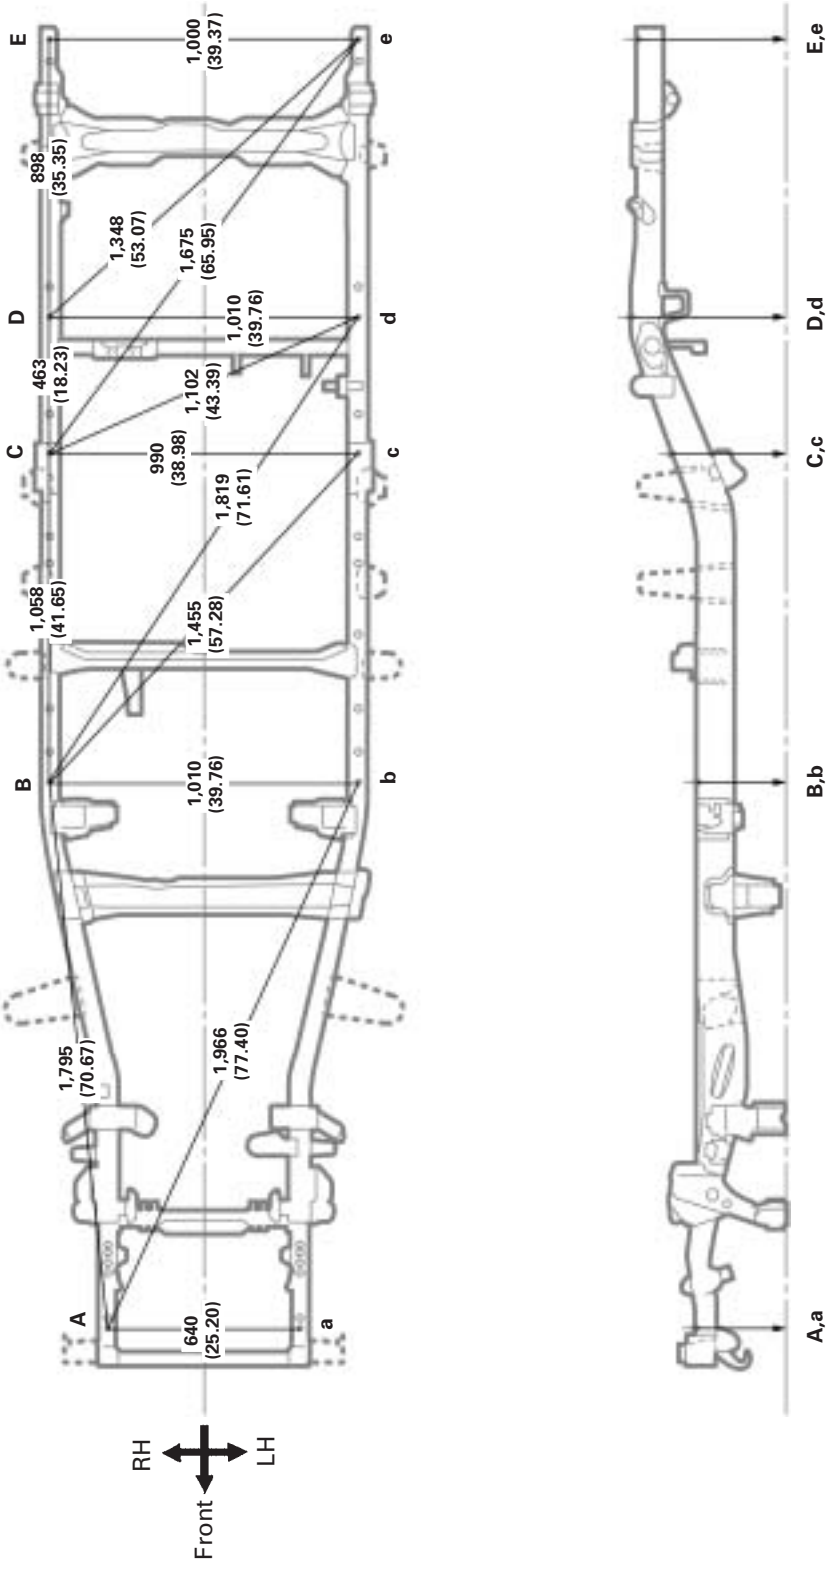


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31)nut
B, b	Wire harness installation hole	7 (0.28)
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9(0.35)
E, e	Rear body mounting hole	18 x 21(0.71 x 0.83)
—	—	—

FRAME DIMENSION – Upper Face
4WD & 4WD STYLE 2WD (Cont'd)

(Two-Dimensional Distance)

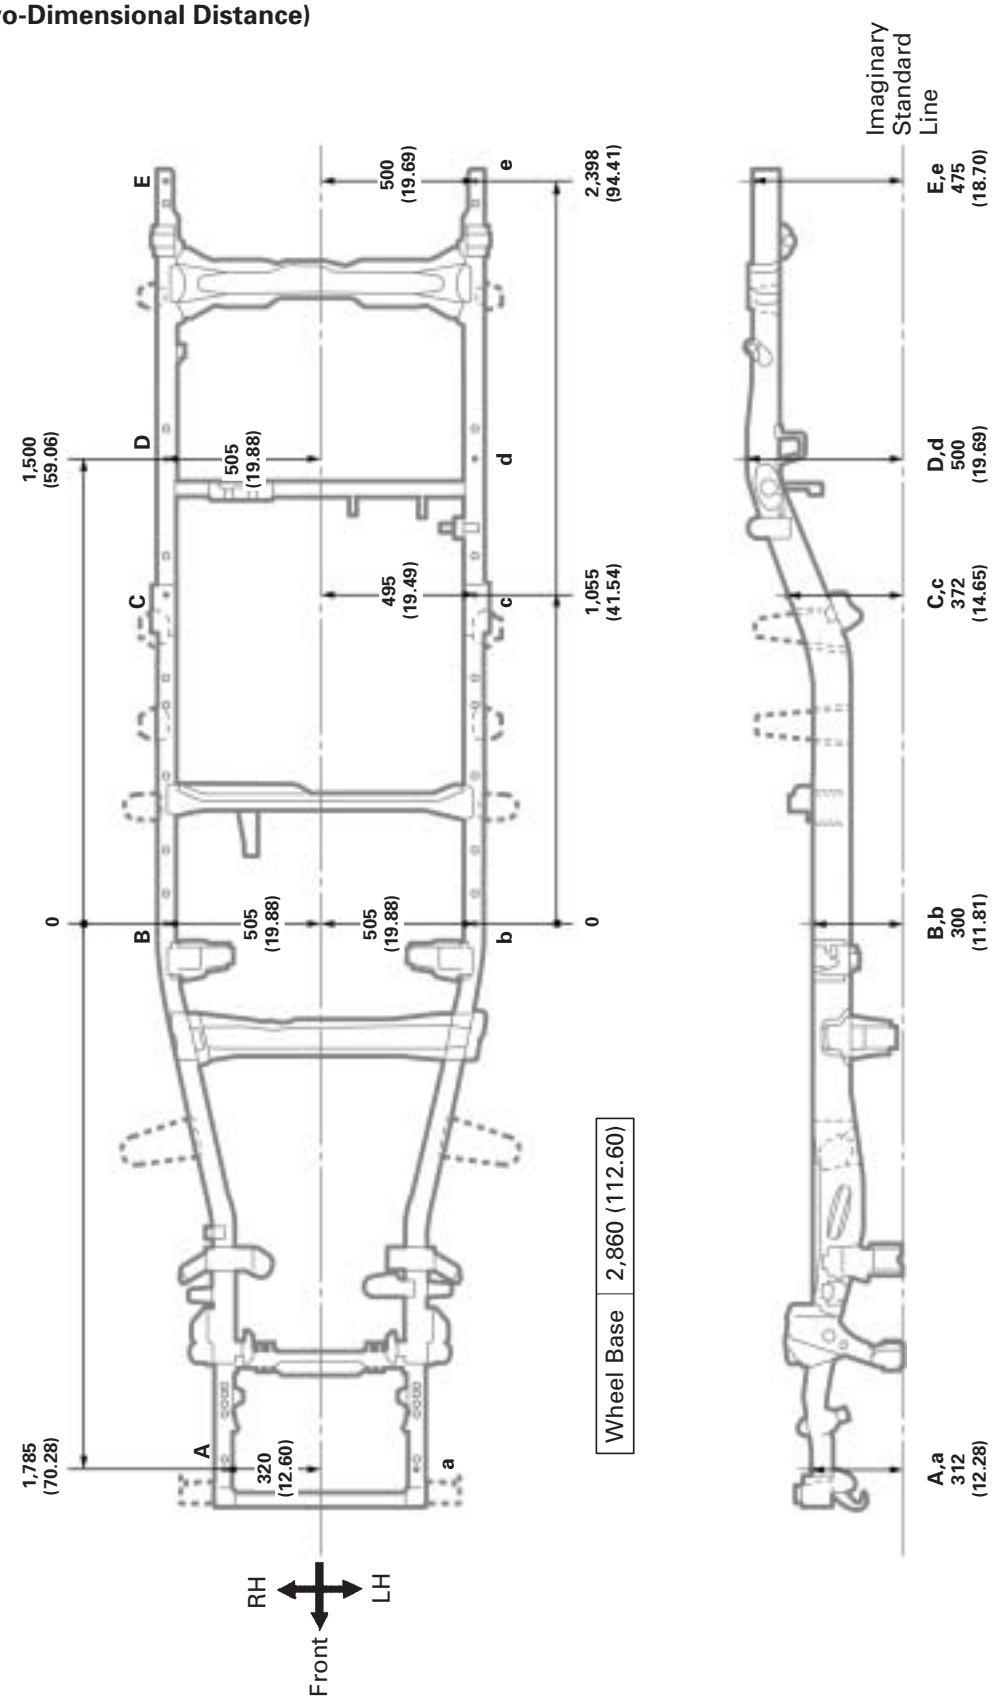


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31)nut
B, b	Wire harness installation hole	7 (0.28)
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9(0.35)
E, e	Rear body mounting hole	18 x 21(0.71 x 0.83)
—	—	—

FRAME DIMENSION – Lower Face
4WD & 4WD STYLE 2WD

(Three-Dimensional Distance)

mm (in.)

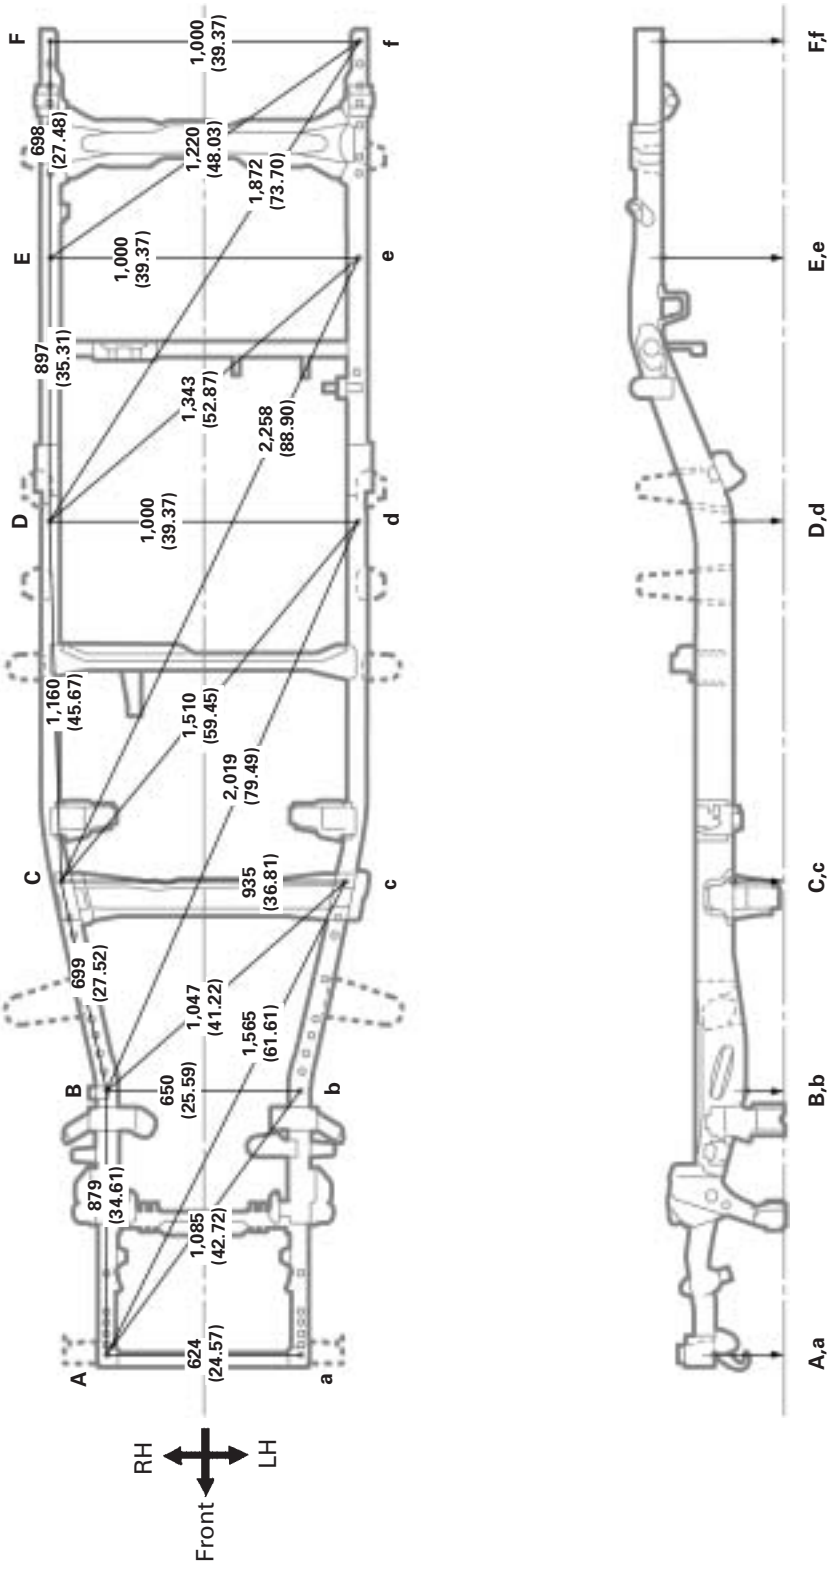


Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Stabilizer bracket installation nut	8 (0.31)nut
C, c	Frame crossmember installation nut	14 (0.55)nut

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	28 x 31 (1.10 x 1.22)

FRAME DIMENSION – Lower Face
4WD & 4WD STYLE 2WD (Cont'd)

(Two-Dimensional Distance)

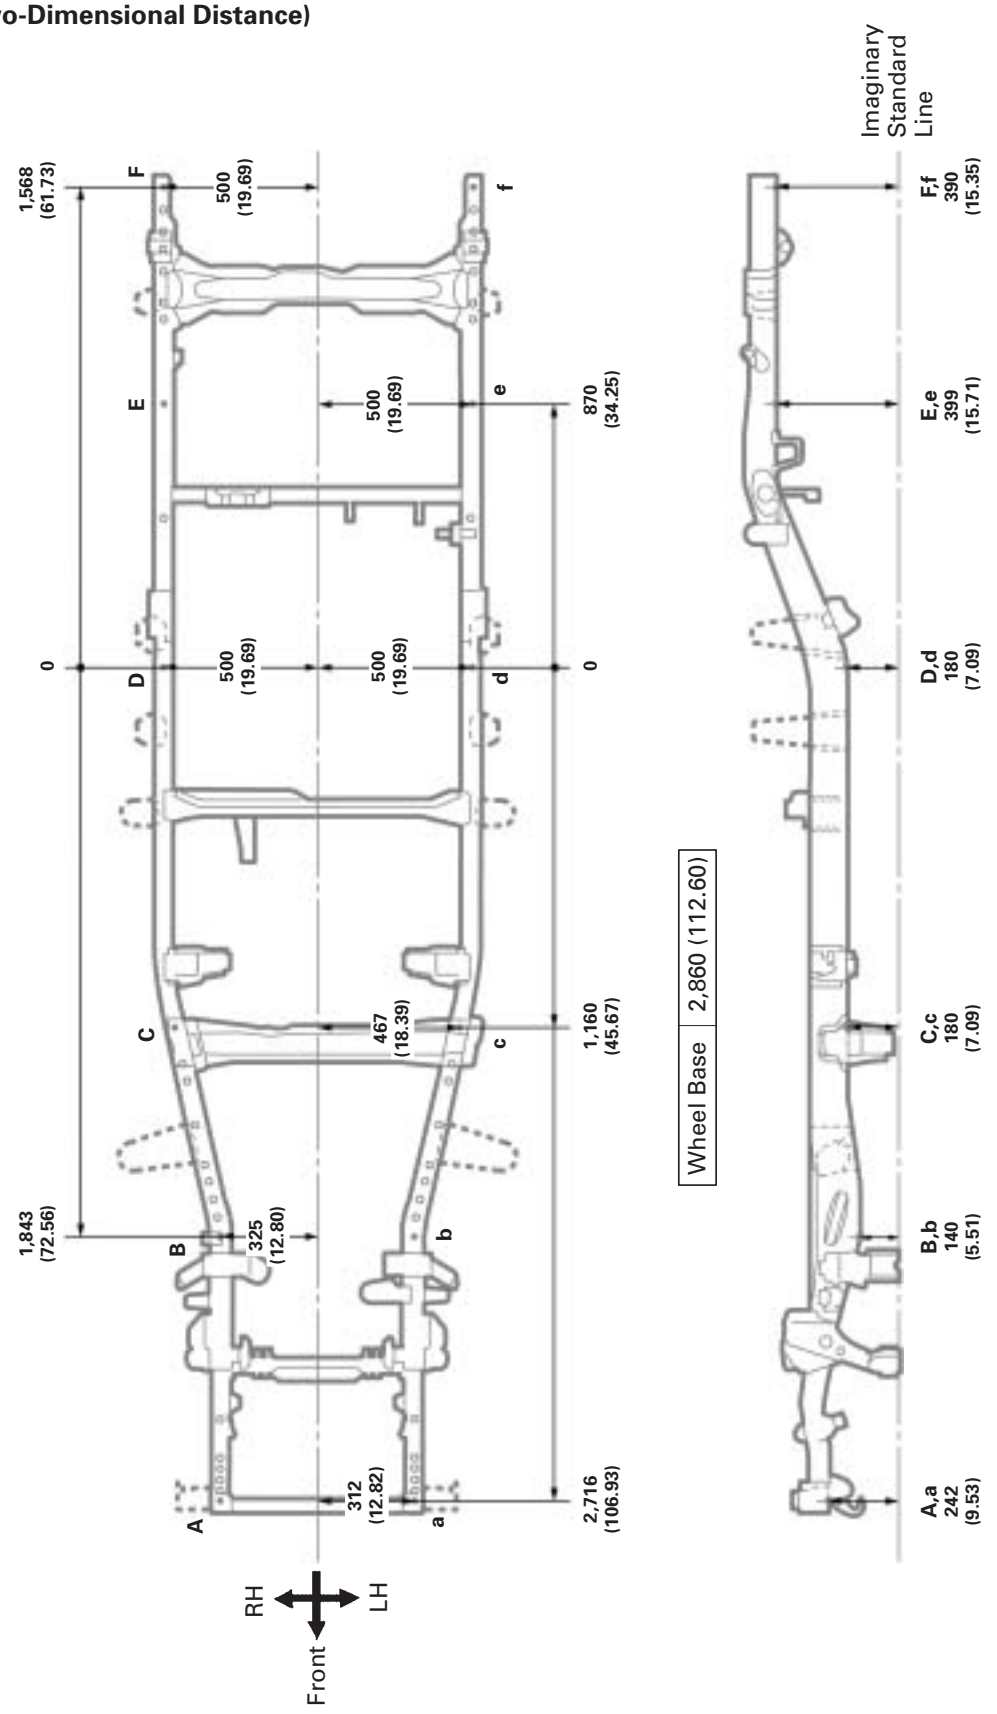

Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Stabilizer bracket installation nut	8 (0.31)nut
C, c	Frame crossmember installation nut	14 (0.55)nut

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	28 x 31 (1.10 x 1.22)