

BODY PANEL SEALING AREAS

HINT:

1. *Prior to applying body sealer, clean the area with a rag soaked in a grease, wax and silicone remover.*
2. *If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.*
3. *Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.*
4. *If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.*


ALL

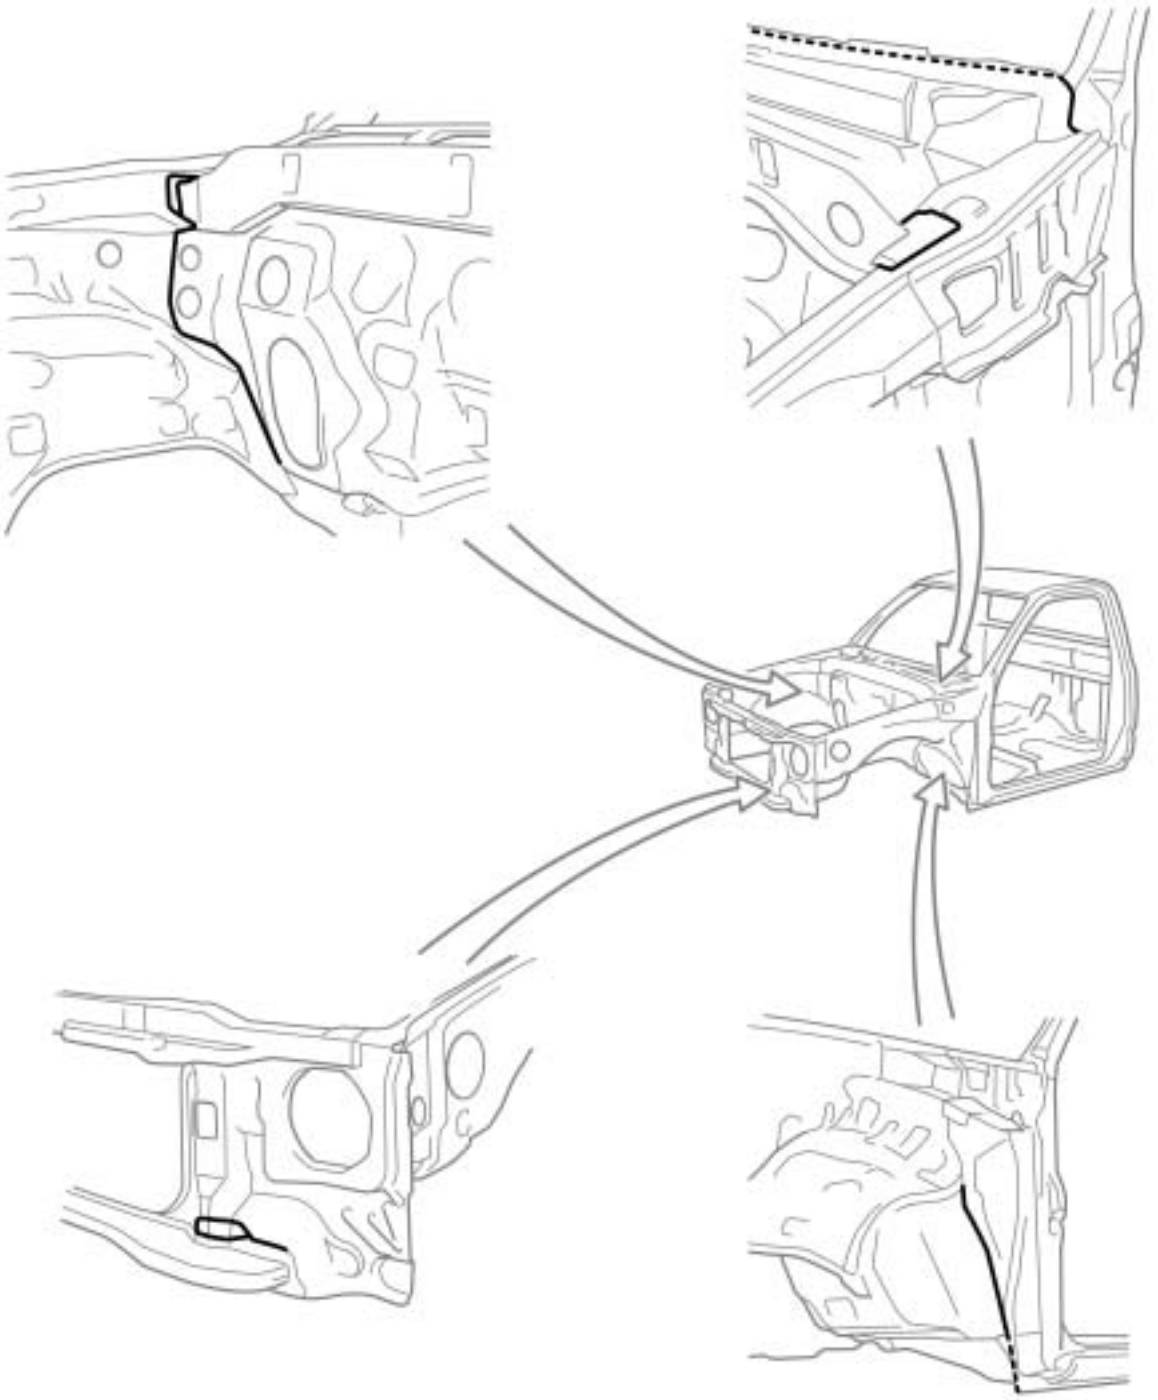

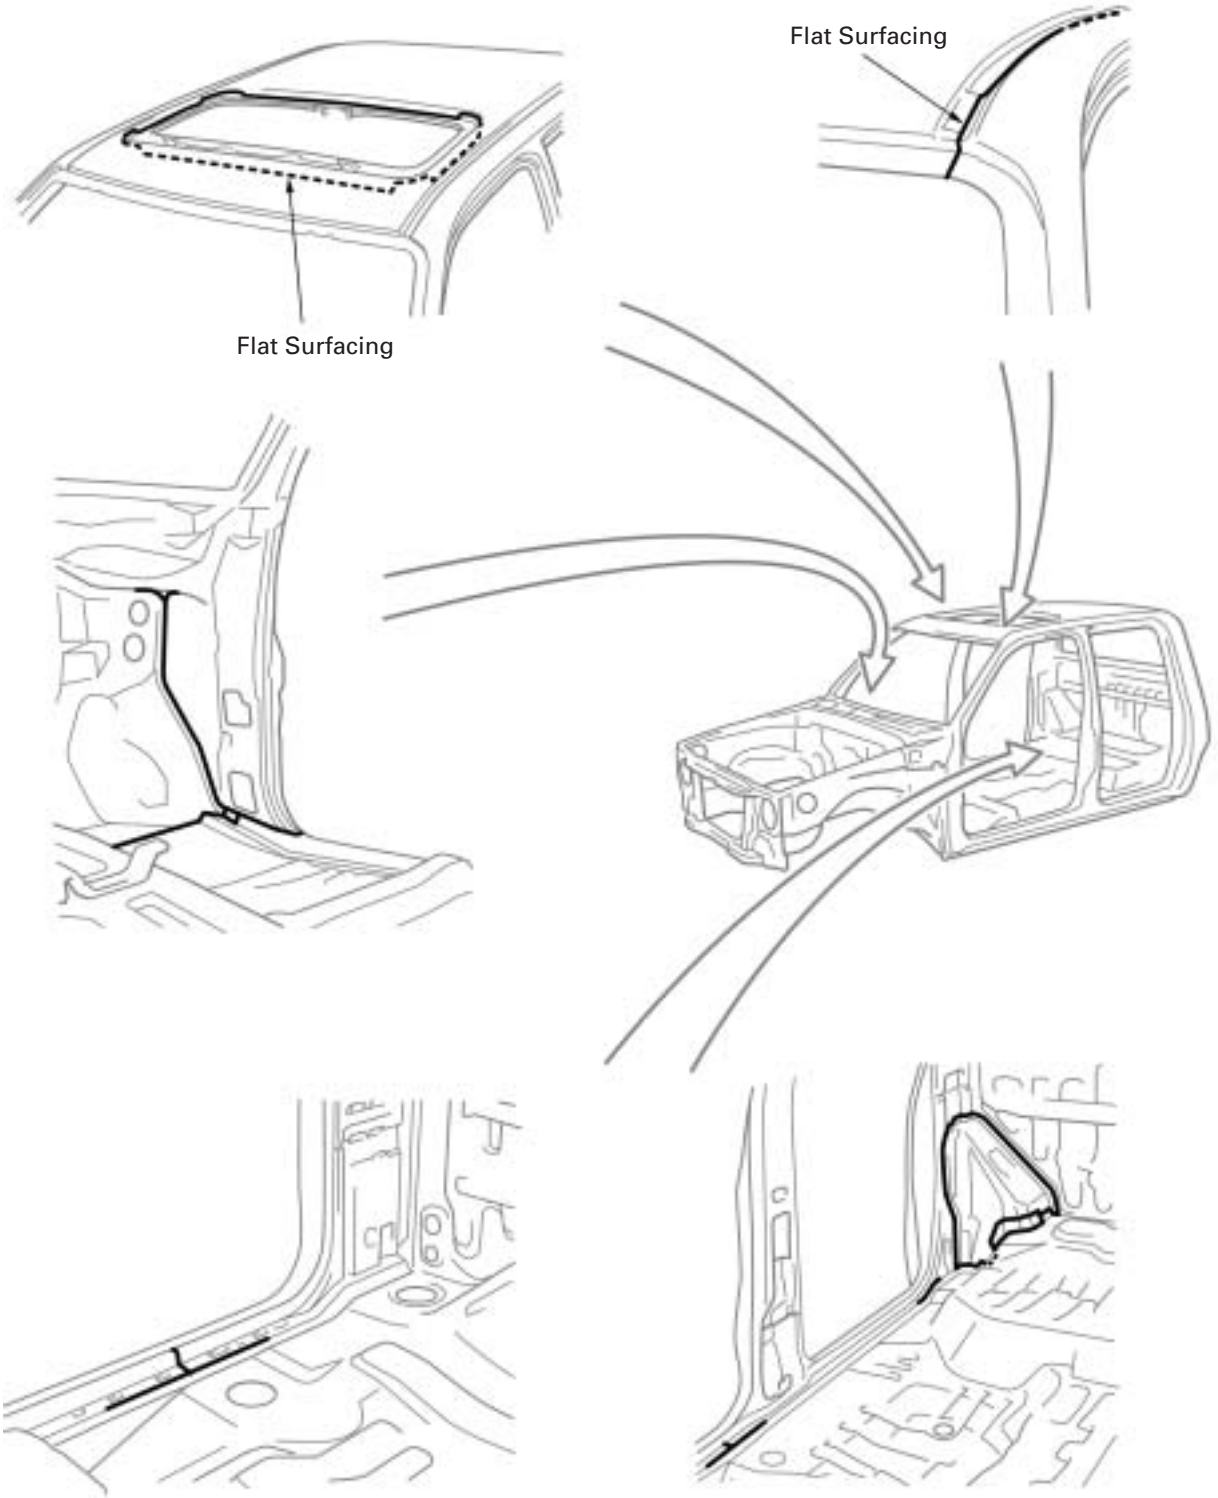


Regular Cab


Double Cab

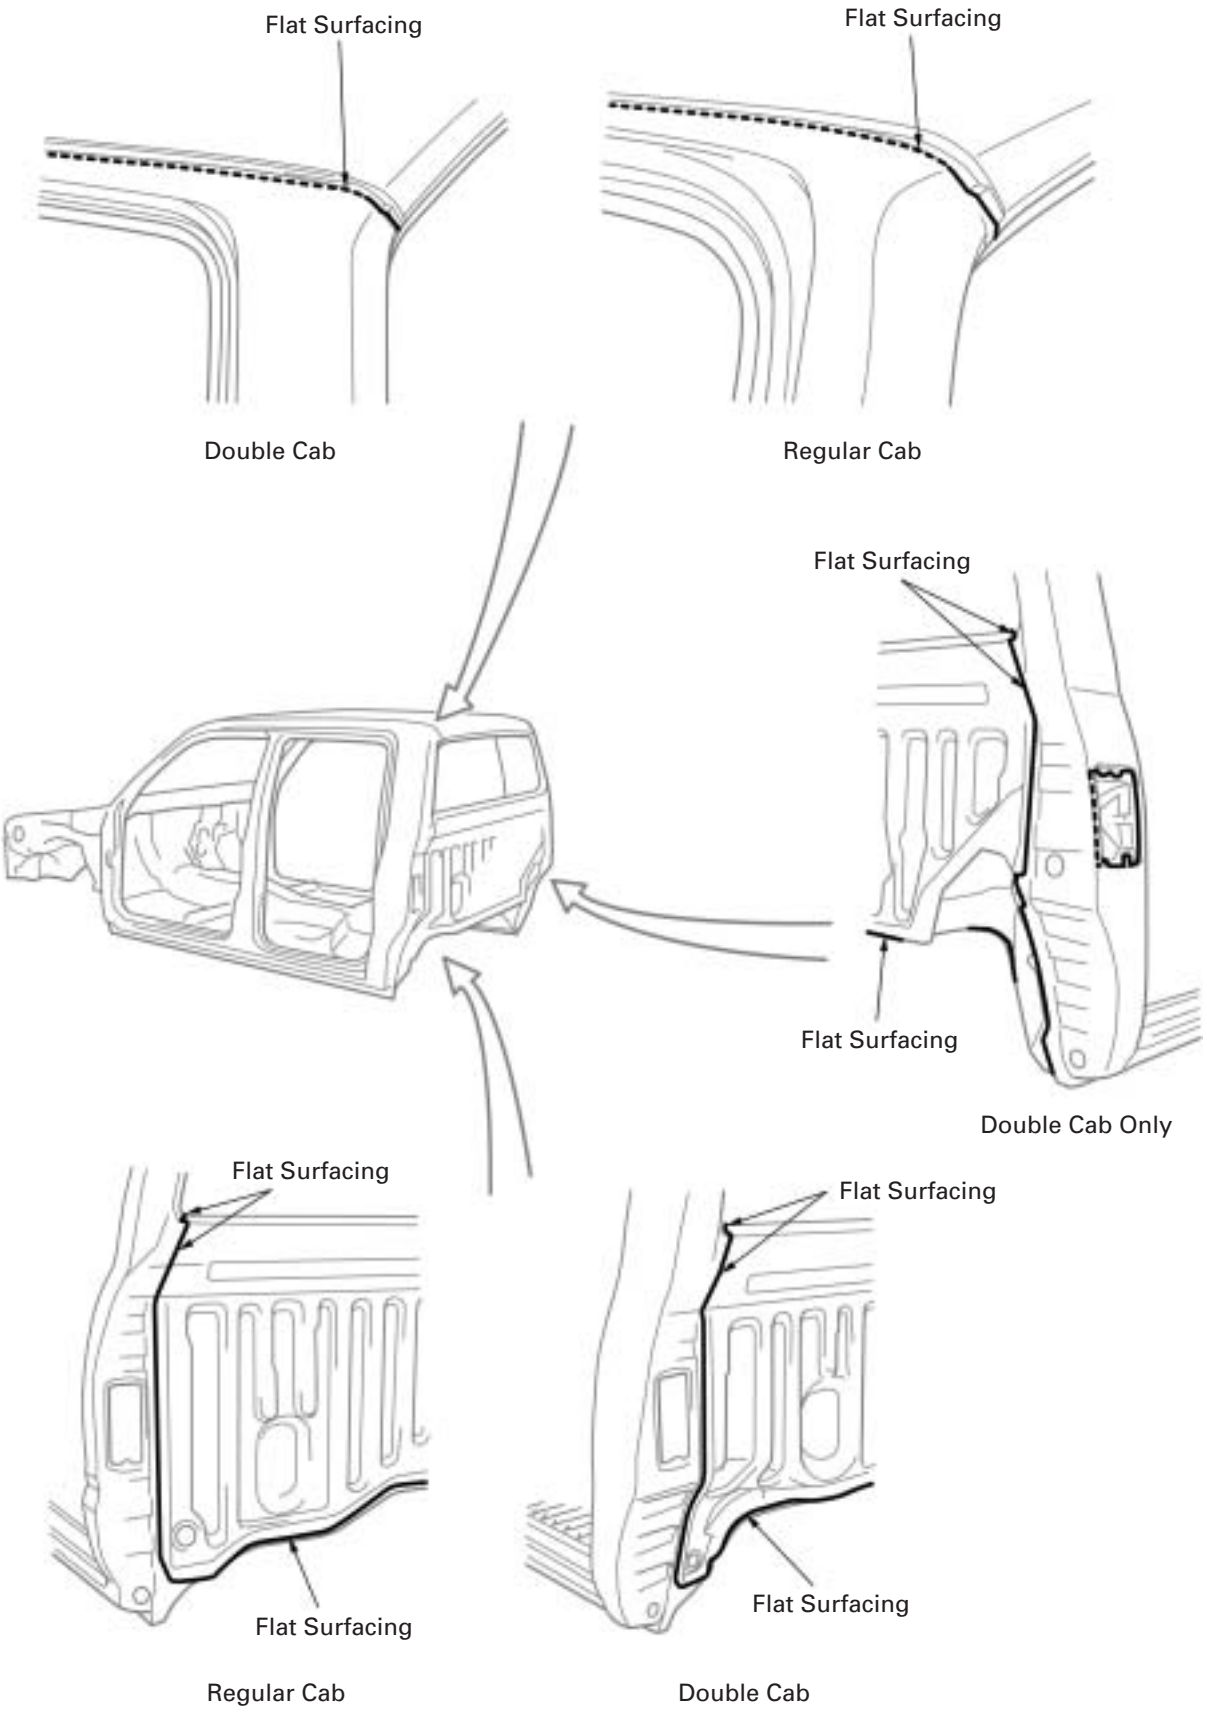

Flat Surfacing
Flat Surfacing
Double Cab
Regular Cab
Flat Surfacing
Flat Surfacing
Double Cab Only
Flat Surfacing
Flat Surfacing
Flat Surfacing
Flat Surfacing
Regular Cab
Double Cab


Flash Surface Type Deck

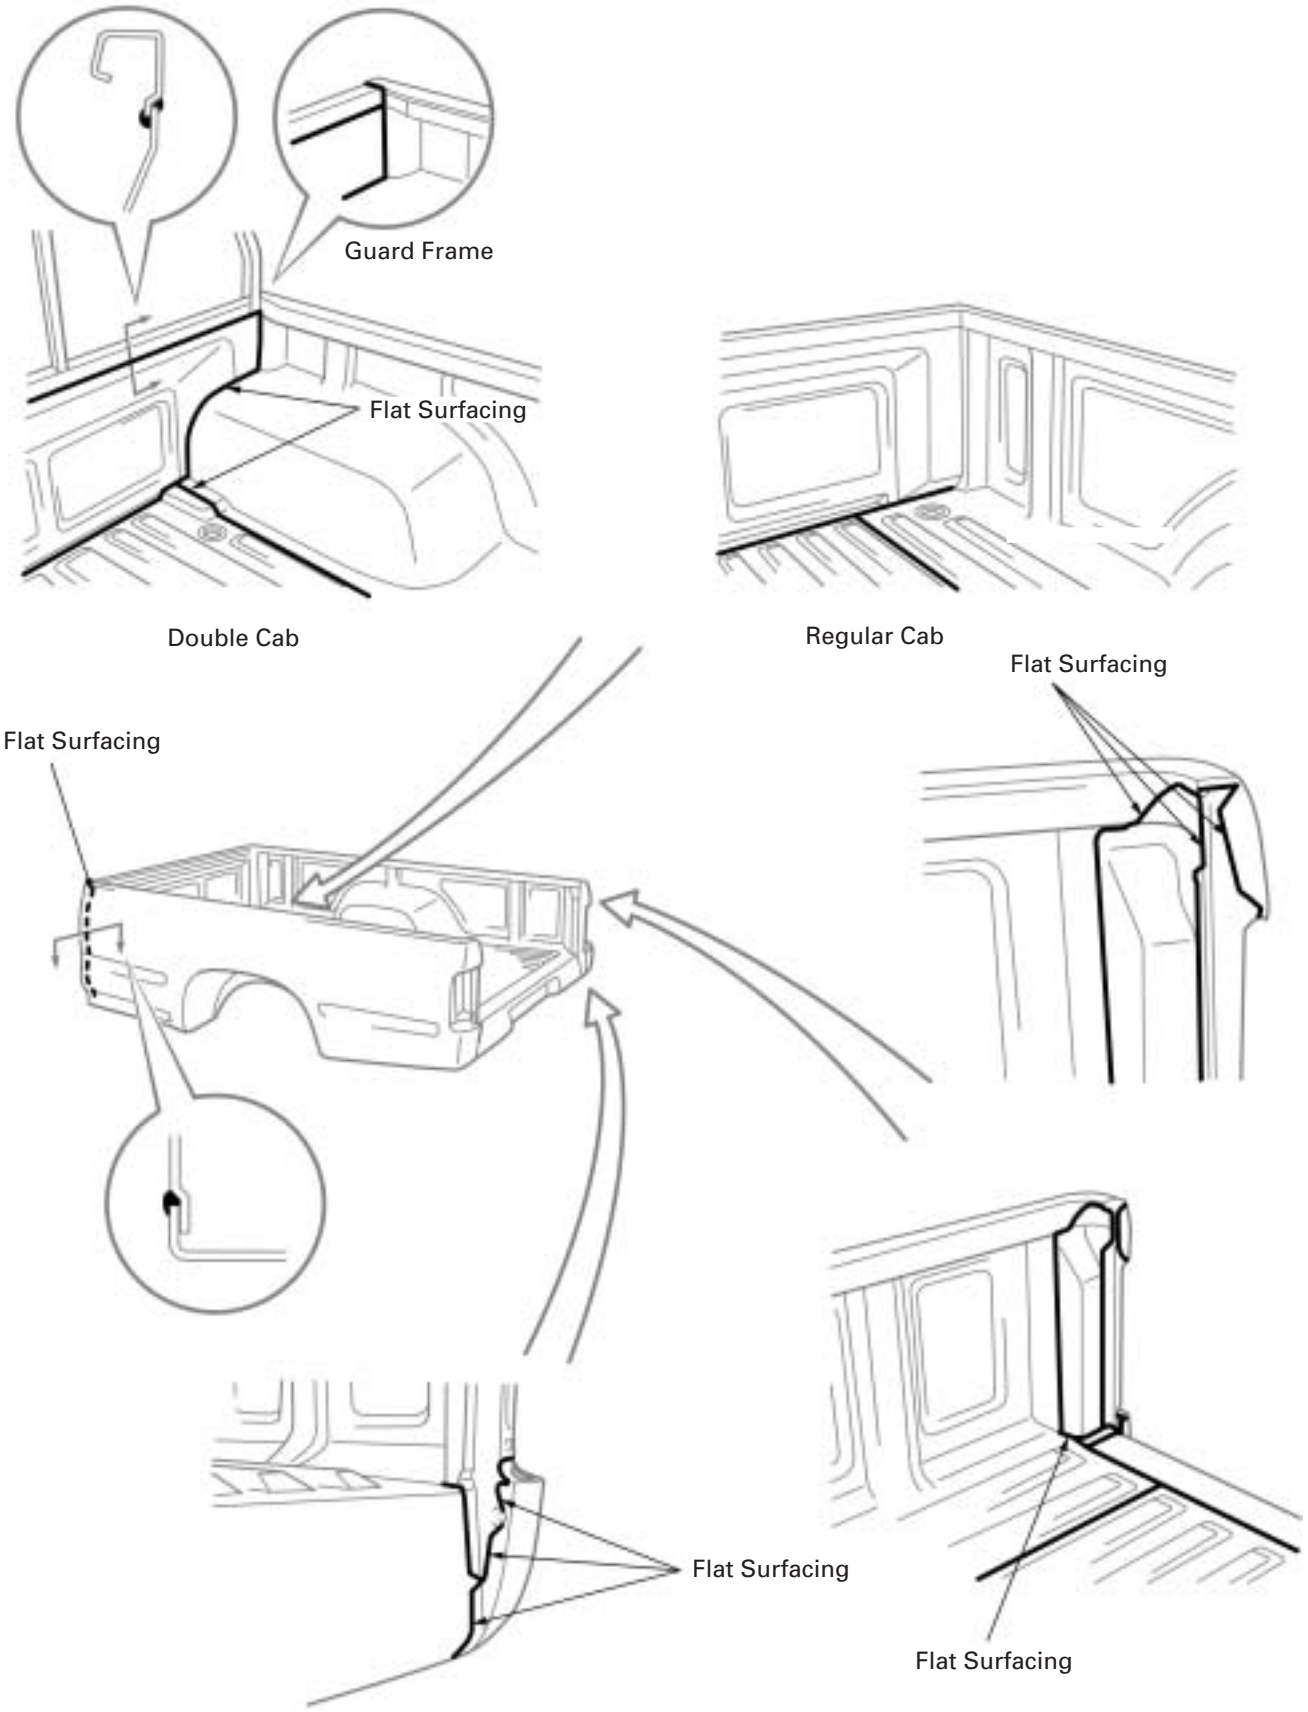


Standard Type Deck

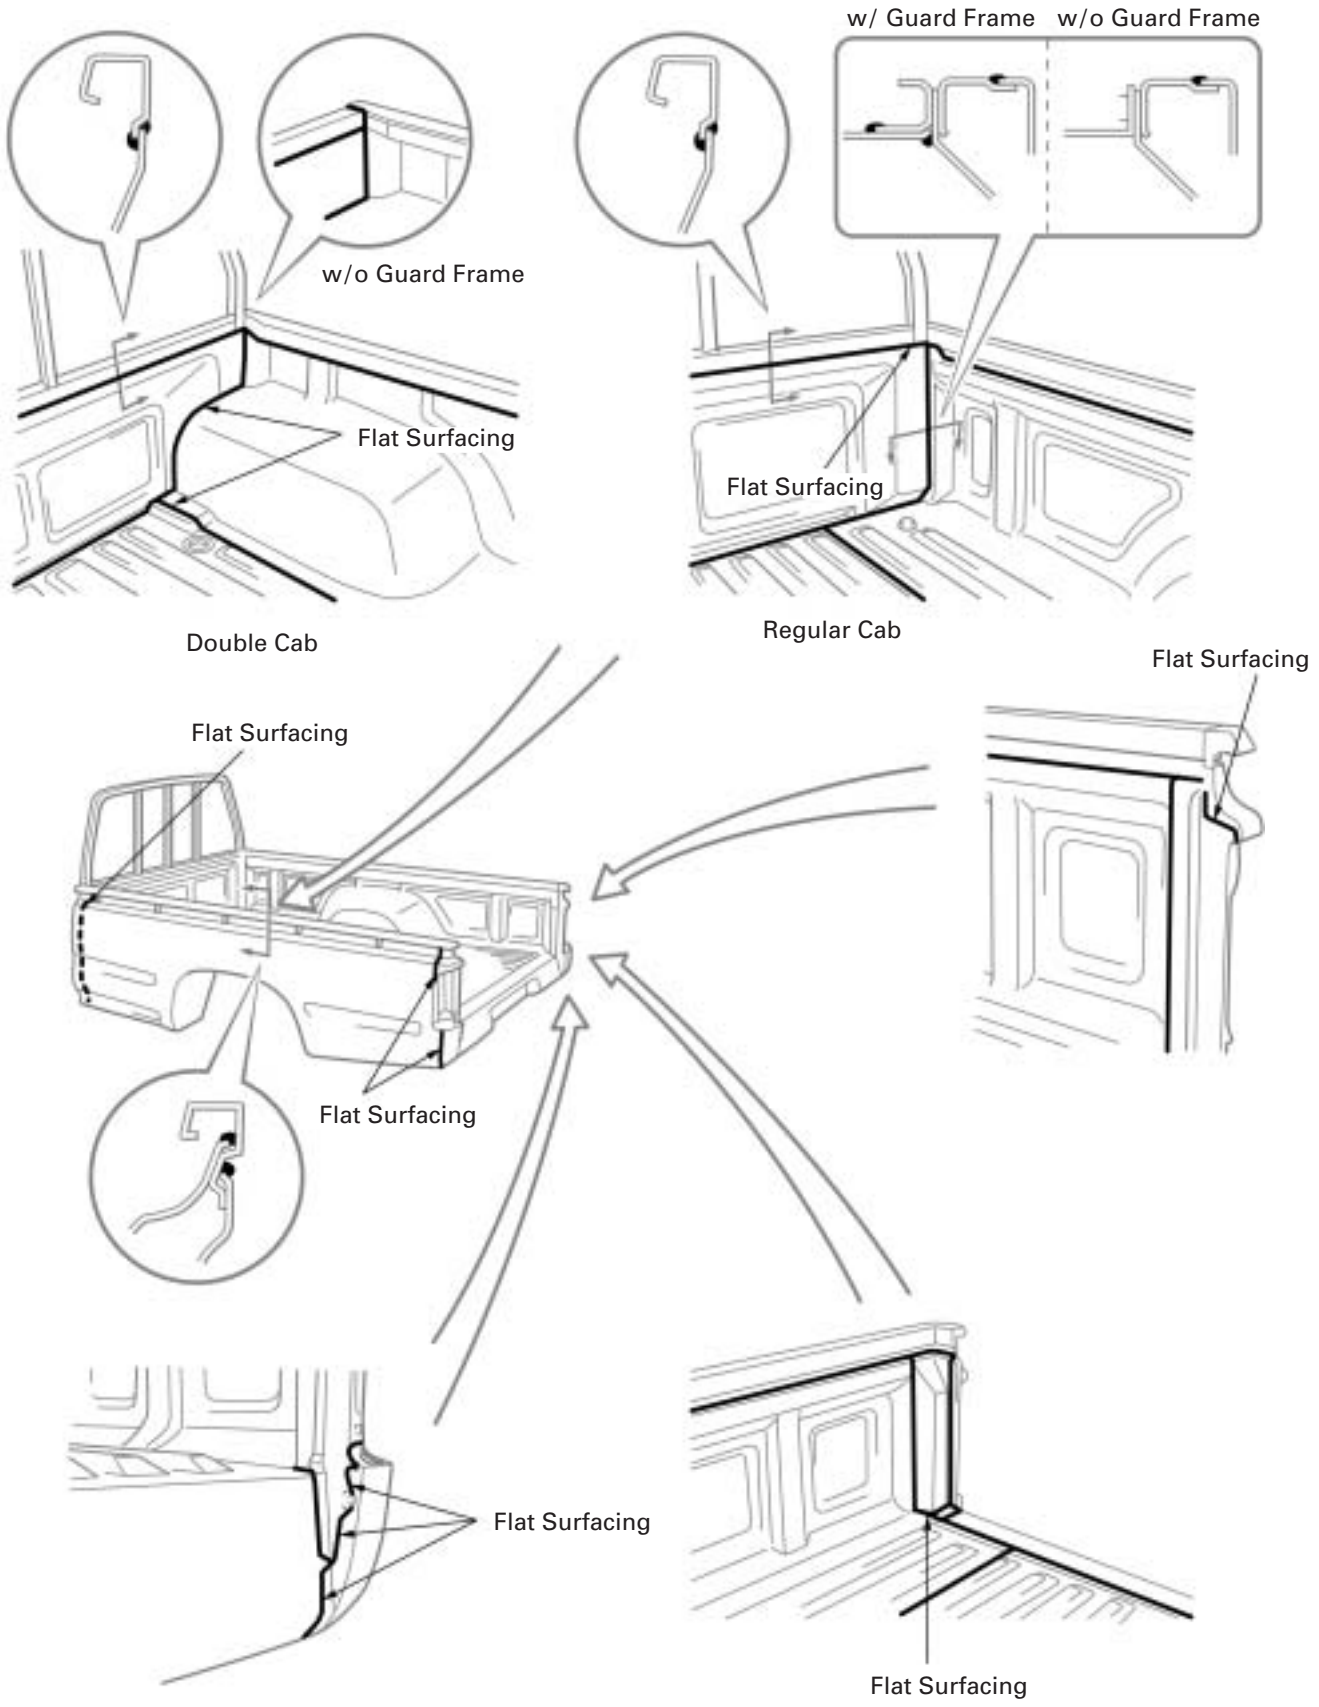


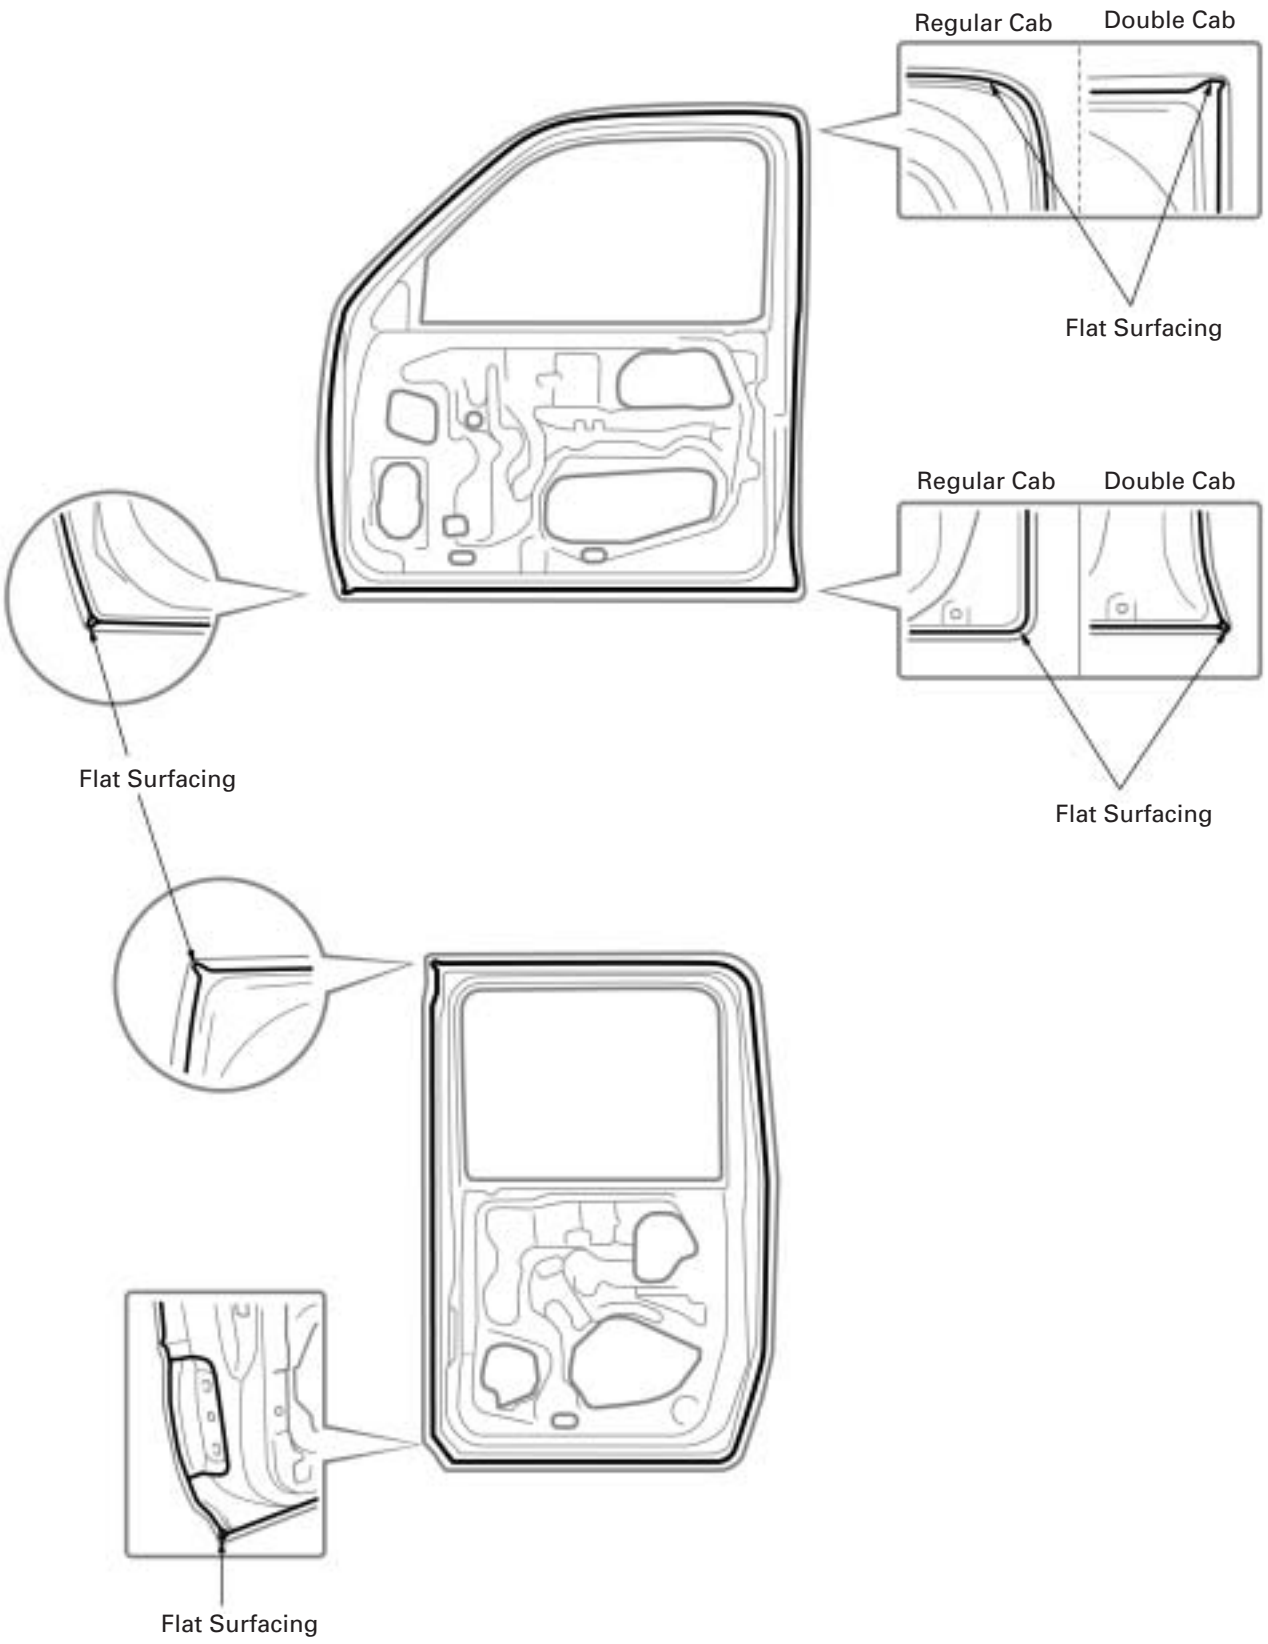
Regular Cab
Double Cab
Flat Surfacing
Regular Cab
Double Cab
Flat Surfacing
Flat Surfacing
Flat Surfacing

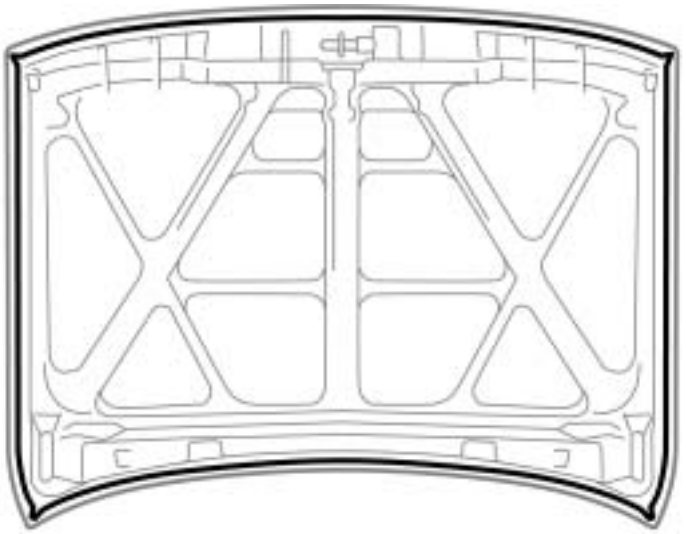

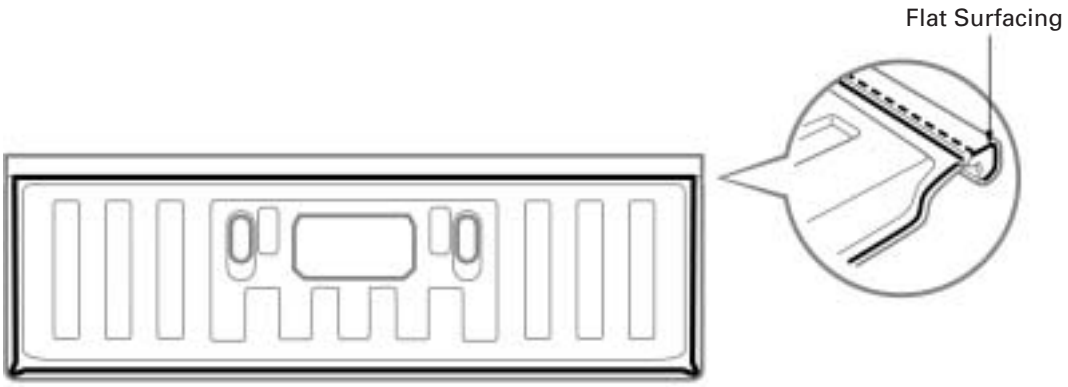

Standard Type Deck

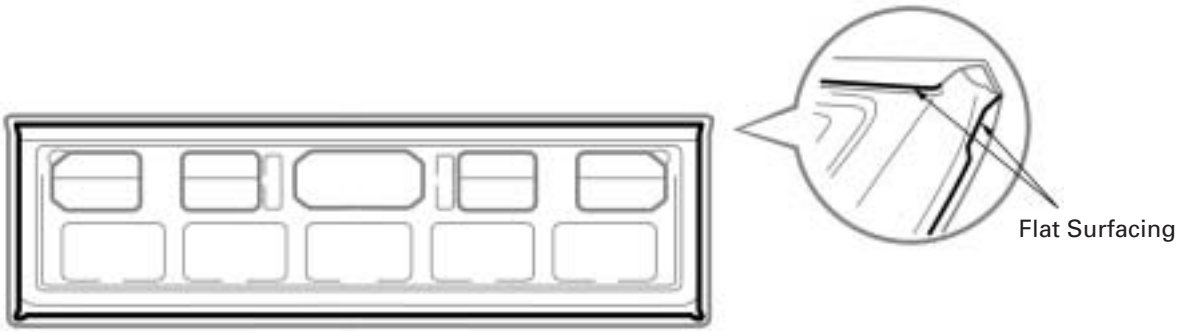

Flash Surface Type Deck