
BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

HINT:


1. *Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.*
2. *Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.*
3. *Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover if accidently applied to other areas.*

REGULAR CAB

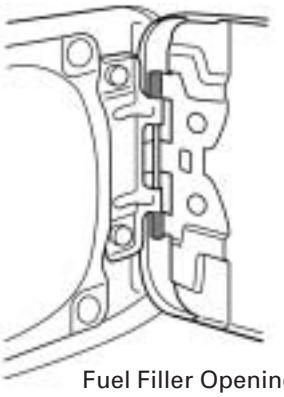

Fuel Filler Opening Lid Hinge






Tail Gate Hinge





Hood

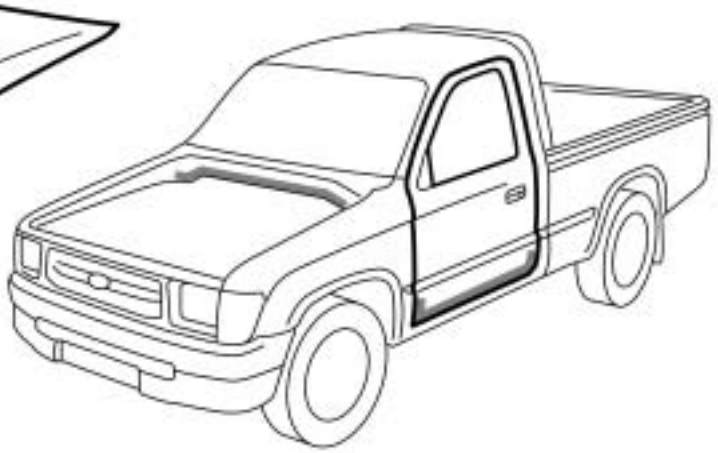



Cowl Top Panel



Hood Hinge



Front Door Hinge



Door