
BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

HINT:


1. *Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.*
2. *Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.*
3. *Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover if accidently applied to other areas.*

REGULAR CAB

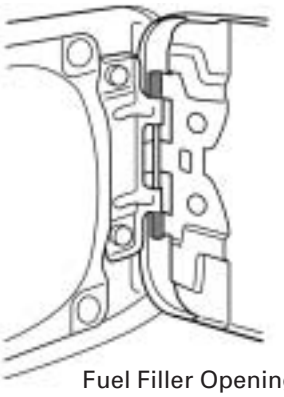

Fuel Filler Opening Lid Hinge






Tail Gate Hinge





Hood

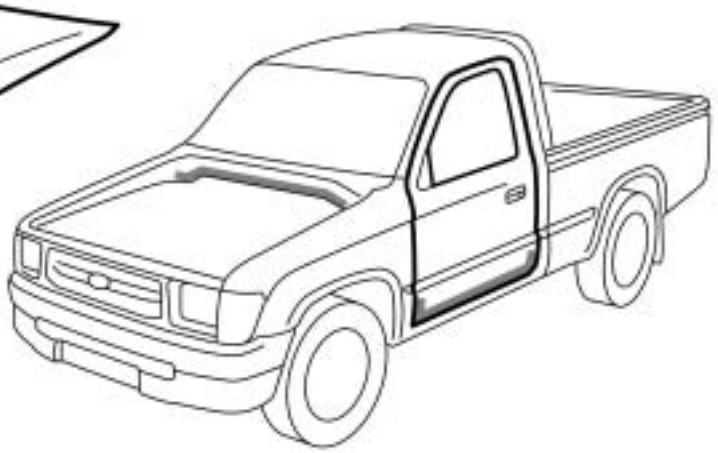



Cowl Top Panel



Hood Hinge




Front Door Hinge




Door

DOUBLE CAB

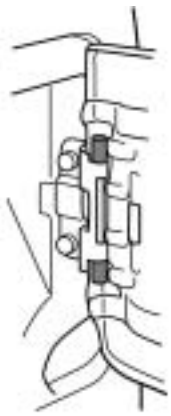

Fuel Filler Opening Lid Hinge






Tail Gate Hinge





Hood

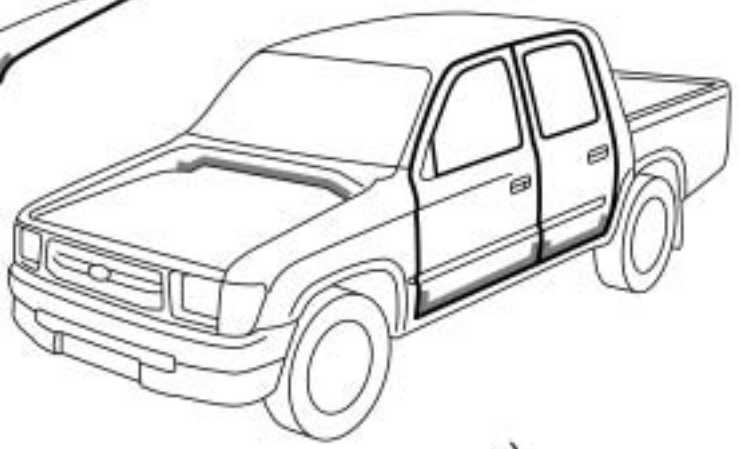



Cowl Top Panel



Hood Hinge



Front Door Hinge



Door



Rear Door Hinge