
BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three-Dimensional Distance)

mm (in.)

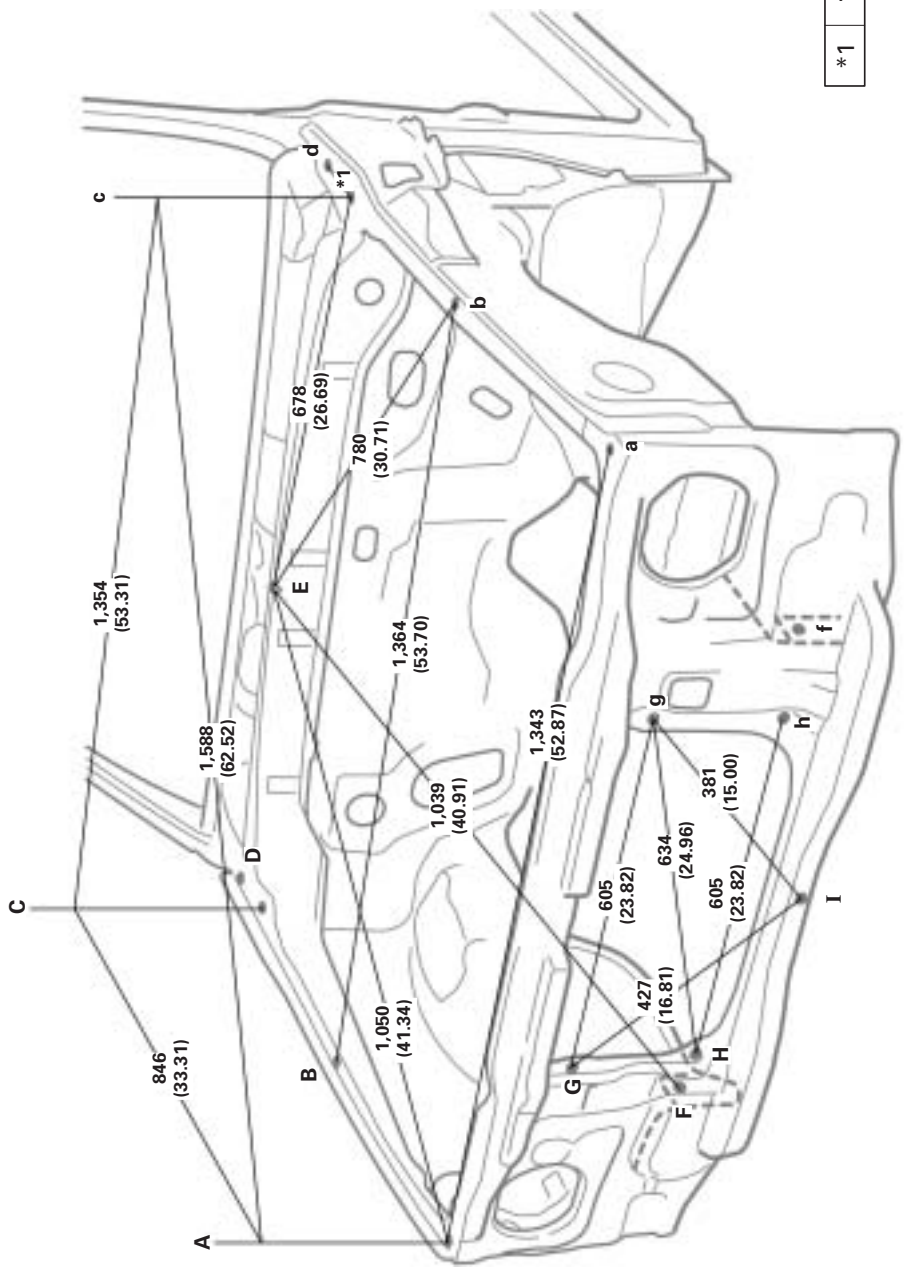


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	F, f	Front fender apron standard hole	13 (0.51)
B, b	Front fender installation nut	6 (0.24) nut	G, g	Radiator installation hole	RH: 13 (0.51) LH: 13 x 8.5 (0.51 x 0.335)
C, c	Front fender installation nut	6 (0.24) nut	H, h	Radiator installation hole	12 (0.47)
D, d	Hood hinge installation nut-rear	8 (0.31) nut	I	Hood lock support installation nut	6 (0.24) nut
E	Cowl top panel vehicle center mark	—	—	—	—

BODY OPENING AREAS

(Three-Dimensional Distance)

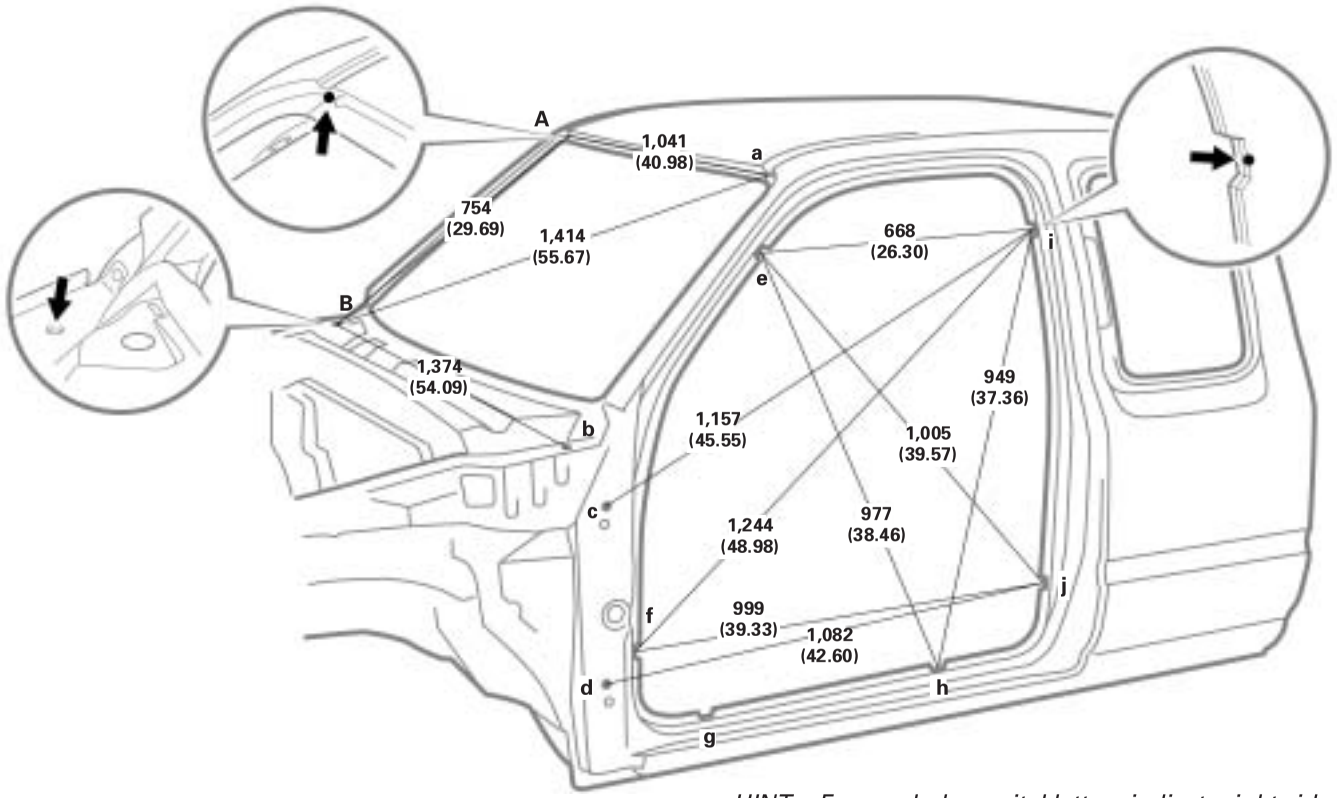

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j
1,249 (49.17)	1,384 (54.49)	1,386 (54.57)	1,386 (54.57)	1,249 (49.17)	1,390 (54.72)

E-f or e-F	E-h or e-H	E-i or e-I	F-i or f-I	F-j or f-J	G-h or g-H	G-i or g-I	H-i or h-I	I-j or i-J
1,543 (60.75)	1,638 (64.49)	1,415 (55.71)	1,812 (71.34)	1,711 (67.36)	1,488 (58.58)	1,798 (70.79)	1,623 (63.90)	1,518 (59.76)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	F, f	Front body pillar assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	G, g	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	H, h	Rocker panel assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	I, i	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	J, j	Quarter panel assembly mark	—

BODY OPENING AREAS (Side View – Front)
DOUBLE CAB

(Three-Dimensional Distance)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j
1,244 (48.98)	1,388 (54.65)	1,386 (54.57)	1,386 (54.57)	1,247 (49.09)	1,389 (54.69)


E-f or e-F	E-h or e-H	E-i or e-I	F-i or f-I	F-j or f-J	G-h or g-H	H-i or h-I	I-j or i-J
1,543 (60.75)	1,638 (64.49)	1,405 (55.31)	1,800 (70.87)	1,641 (64.61)	1,488 (58.58)	1,621 (63.82)	1,520 (59.84)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	I, i	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	J, j	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Raer door hinge installation hole	15 (0.59)
F, f	Front body pillar assembly mark	—	L, l	Raer door hinge installation hole	15 (0.59)

FRAME DIMENSION

2WD (Except Thailand)

(Three-Dimensional Distance)

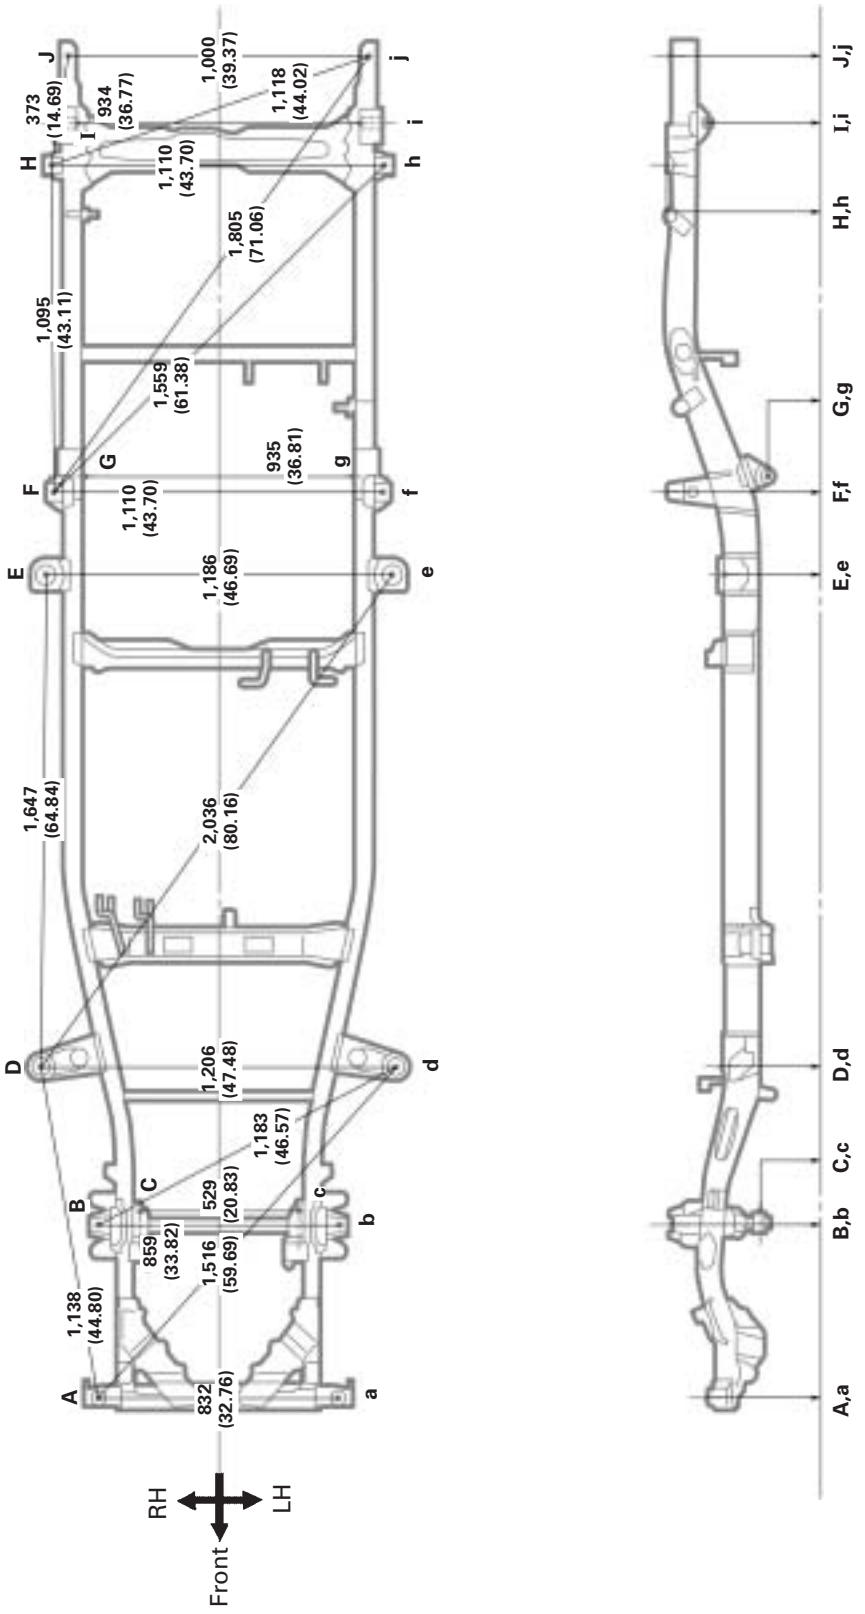

mm (in.)


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	70 (2.76)

Symbol	Name	Hole dia.
F, f	Rear body mounting hole	22 (0.87)
G, g	Rear spring front hanger hole-inner	14.6 (0.575)
H, h	Rear body mounting hole	22 (0.87)
I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

2WD (Except Thailand) (Cont'd)

(Two-Dimensional Distance)

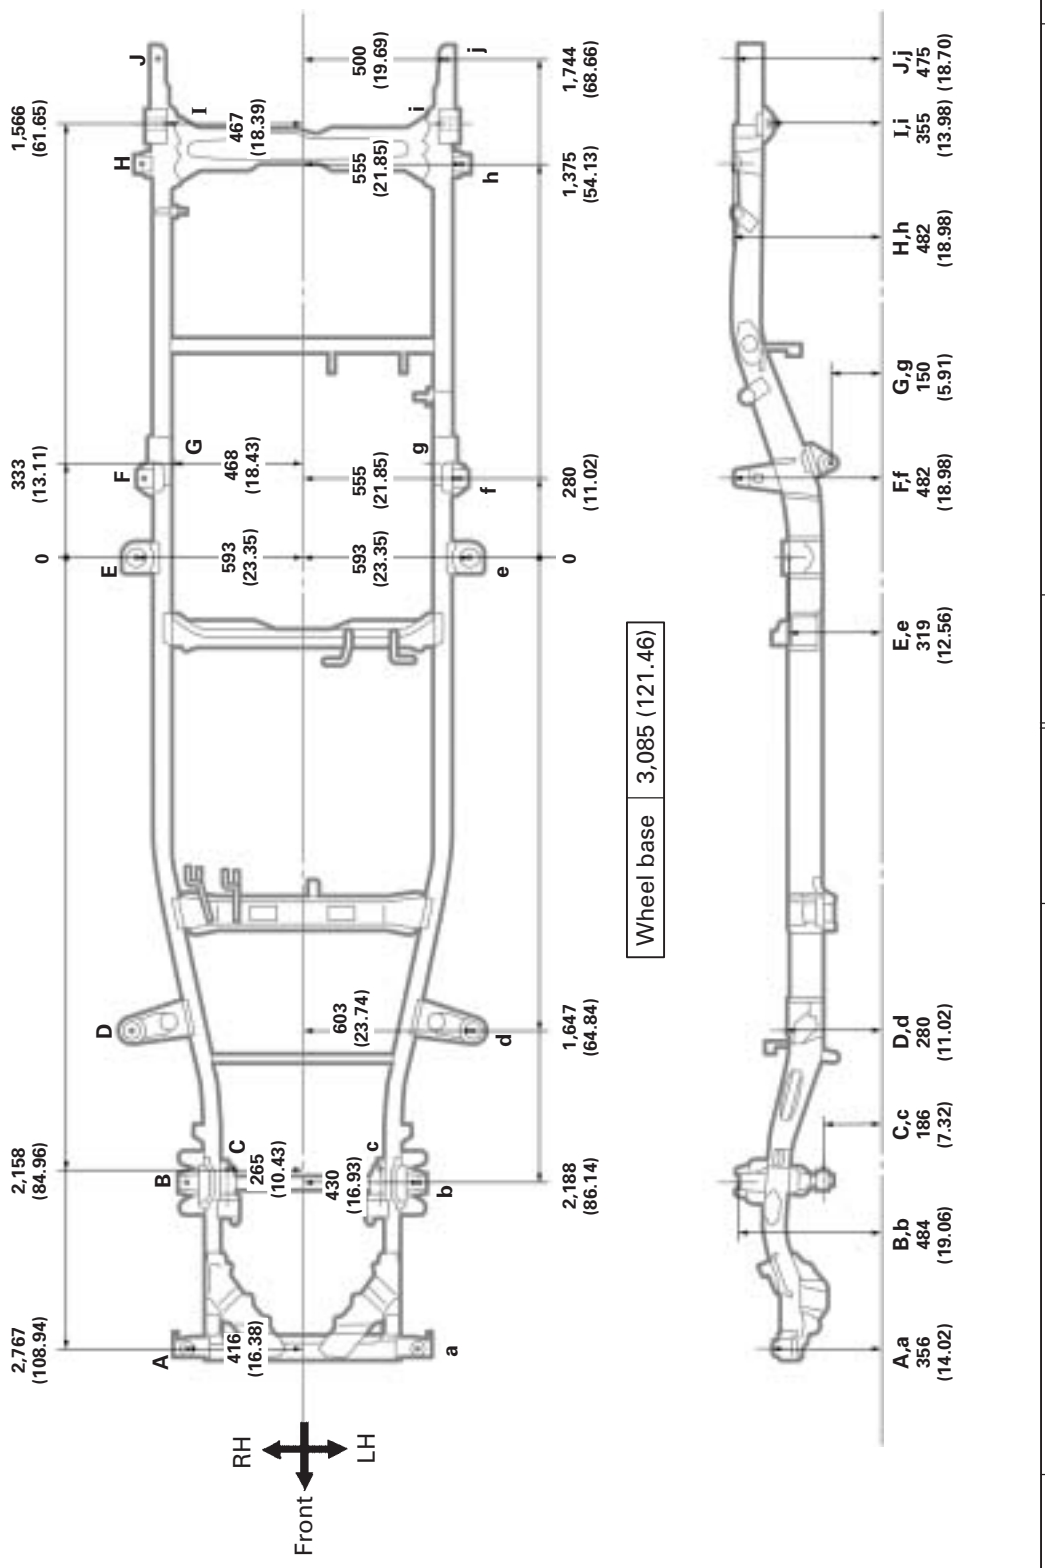

mm (in.)

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	70 (2.76)


Symbol	Name	Hole dia.
F, f	Raar body mounting hole	22 (0.87)
G, g	Rear spring front hanger hole-inner	14.6 (0.575)
H, h	Raar body mounting hole	22 (0.87)
I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
J, j	Raar body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

2WD (For Thailand)

(Three-Dimensional Distance)

mm (in.)

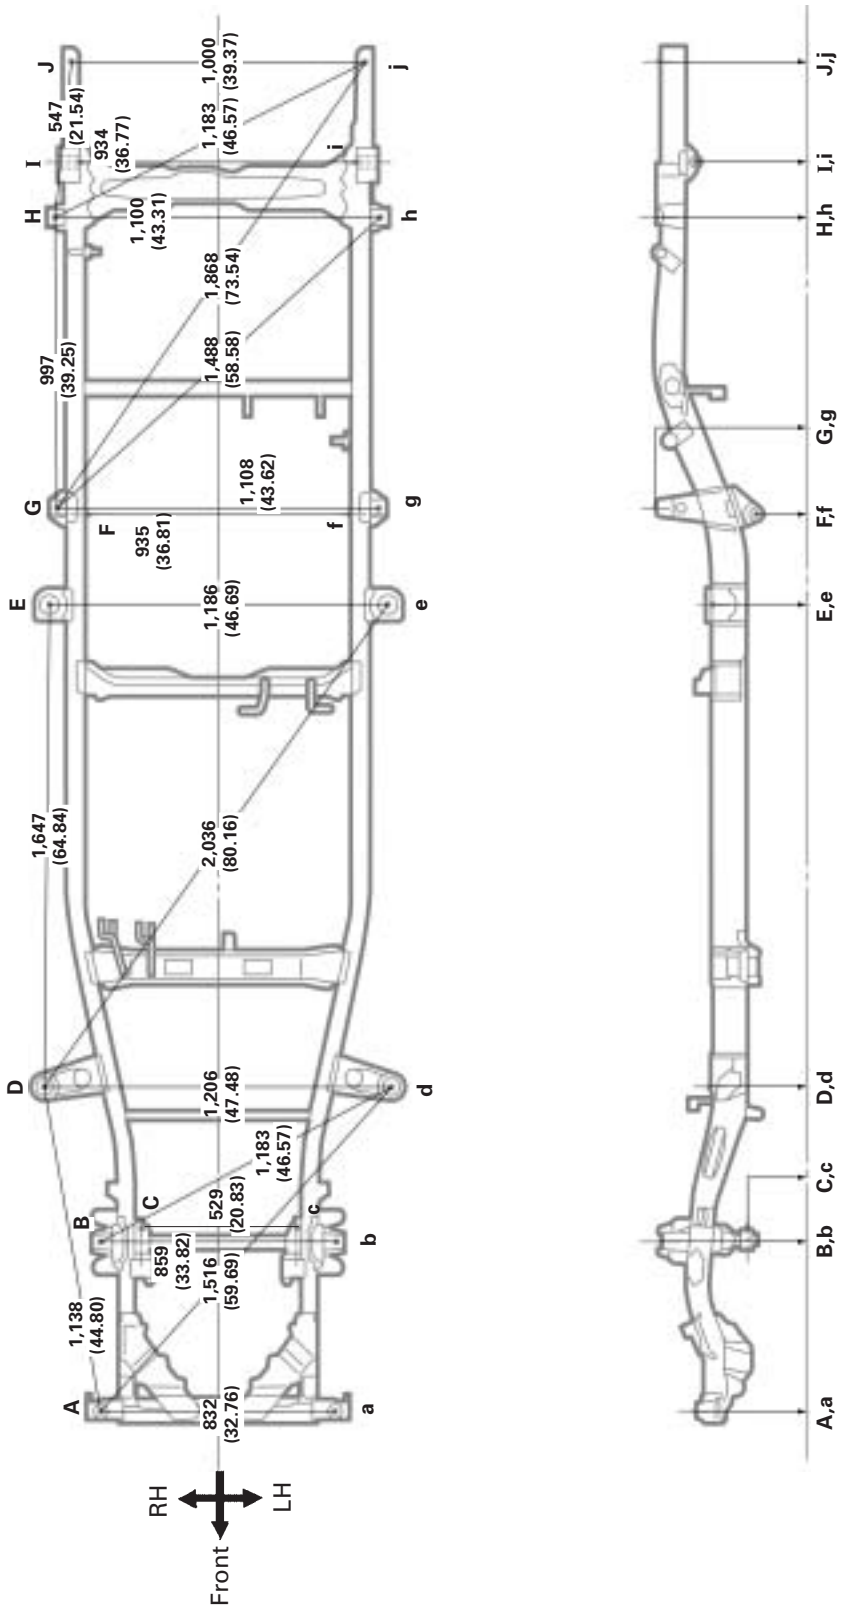


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	F, f	Rear body mounting hole	22 (0.87)
B, b	Shock absorber installation hole	16 (0.63)	G, g	Rear spring front hanger hole-inner	14.6 (0.575)
C, c	Suspension lower arm installation hole	36 (1.42)	H, h	Rear body mounting hole	22 (0.87)
D, d	Body mounting hole	24 (0.94)	I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
E, e	Body mounting hole	70 (2.76)	J, j	Rear body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

2WD (For Thailand) (Cont'd)

(Two-Dimensional Distance)

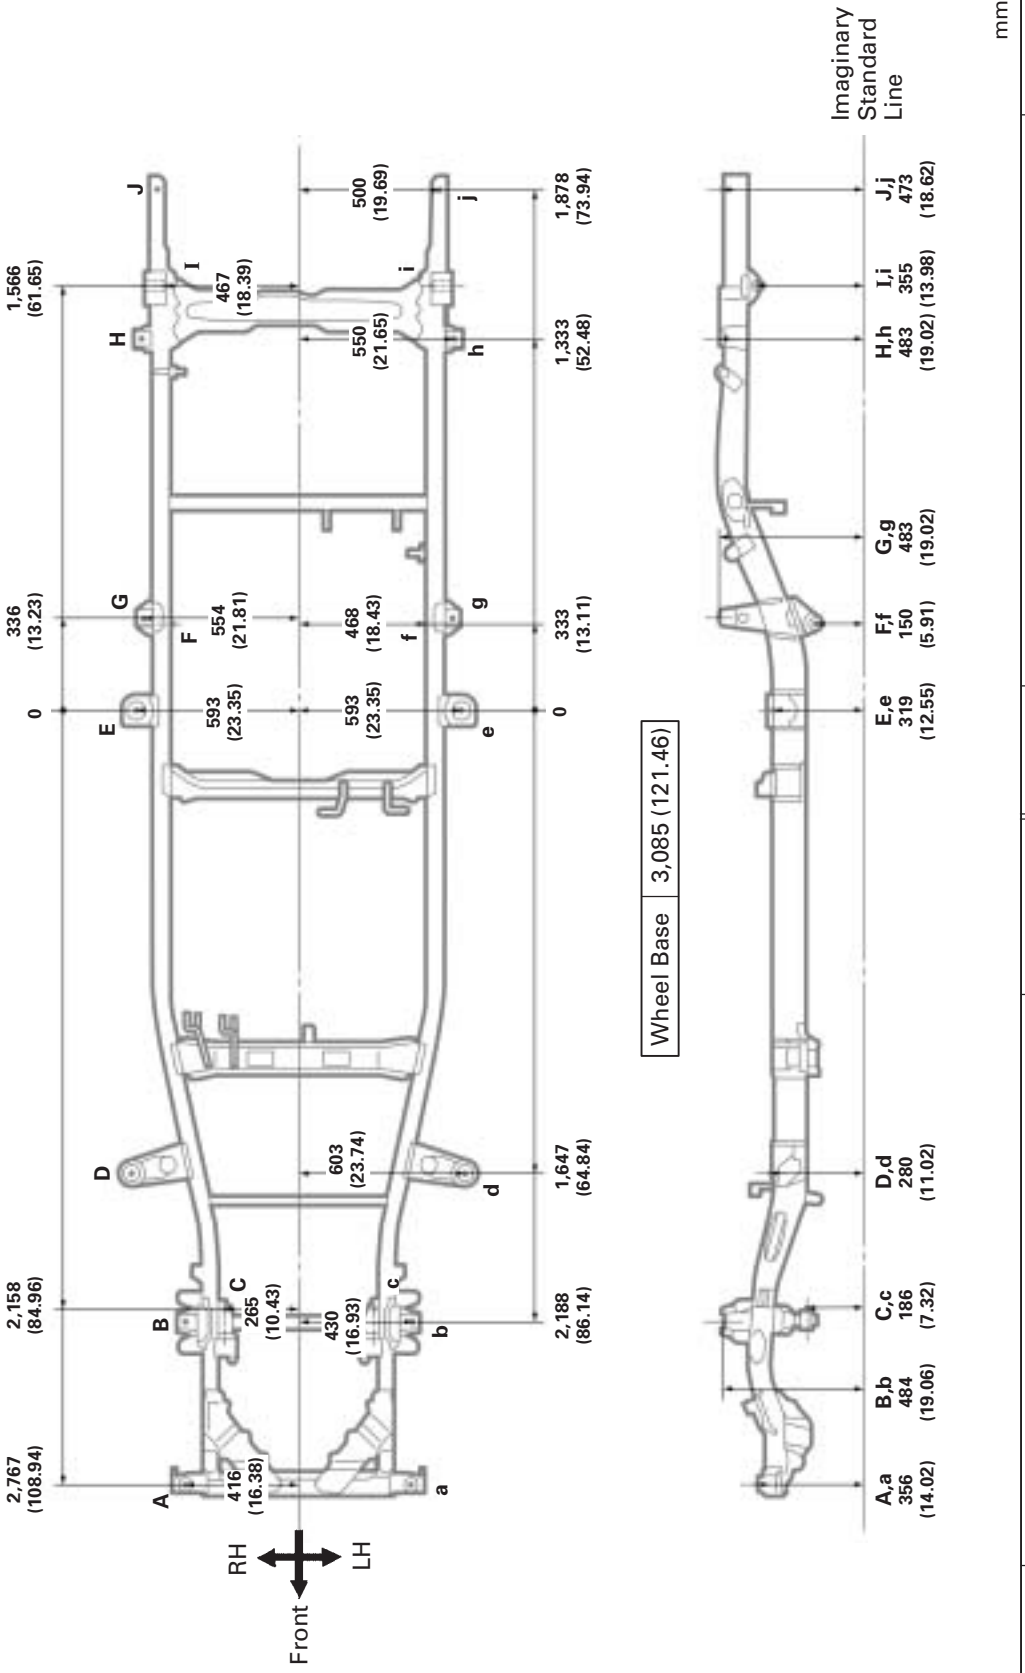

mm (in.)


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)
C, c	Suspension lower arm installation hole	36 (1.42)
D, d	Body mounting hole	24 (0.94)
E, e	Body mounting hole	70 (2.76)

Symbol	Name	Hole dia.
F, f	Raar body mounting hole	22 (0.87)
G, g	Rear spring front hanger hole-inner	14.6 (0.575)
H, h	Raar body mounting hole	22 (0.87)
I, i	Rear spring rear hanger hole-inner	30.2 (1.189)
J, j	Raar body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION

4WD STYLE 2WD

(Three-Dimensional Distance)

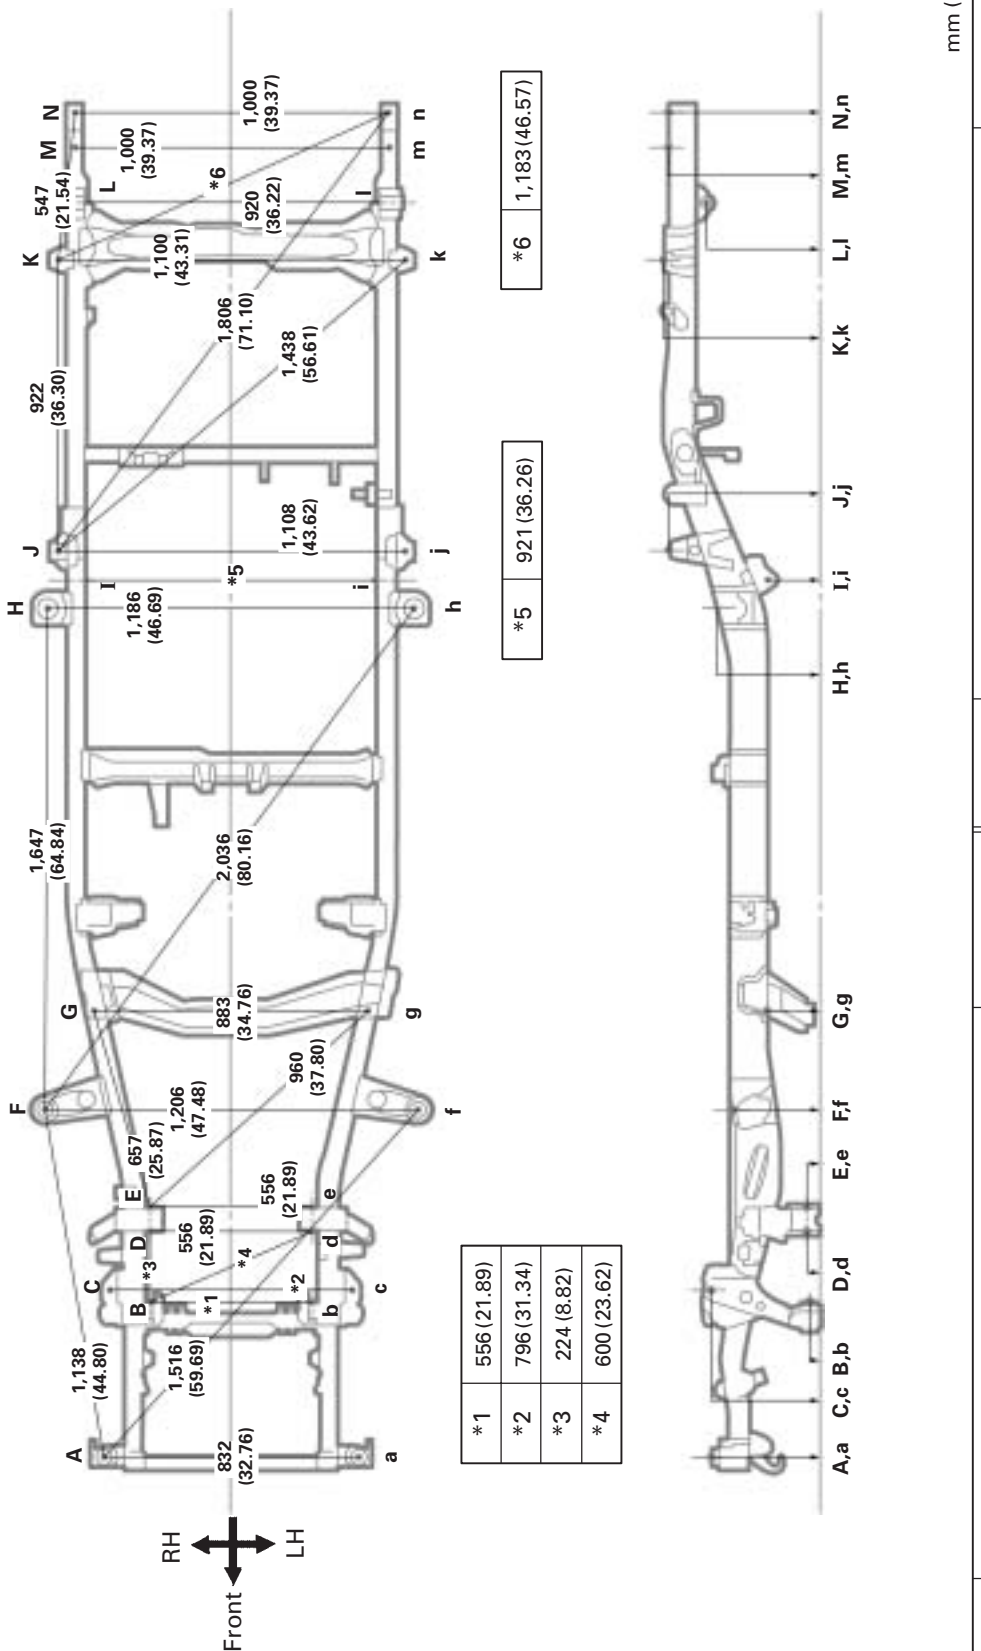

*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)
*4	600 (23.62)

*5	921 (36.26)

*6	1,183 (46.57)


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hose	24 (0.94)	H, h	Body mounting hole	70 (2.76)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)	I, i	Rear spring front hanger hole-inner	14.3 (0.563)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Rear body mounting hole	17 (0.67)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)	K k	Rear body mounting hole	22 (0.87)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)	L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
F, f	Body mounting hole	24 (0.94)	M, m	Rear body mounting hole	18 x 21 (0.71 x 0.83)
G, g	Frame crossmember installation nut	12 (0.47) nut	N, n	Rear body mounting hole	18 (0.71)

FRAME DIMENSION

4WD STYLE 2WD (Cont'd)

(Two-Dimensional Distance)

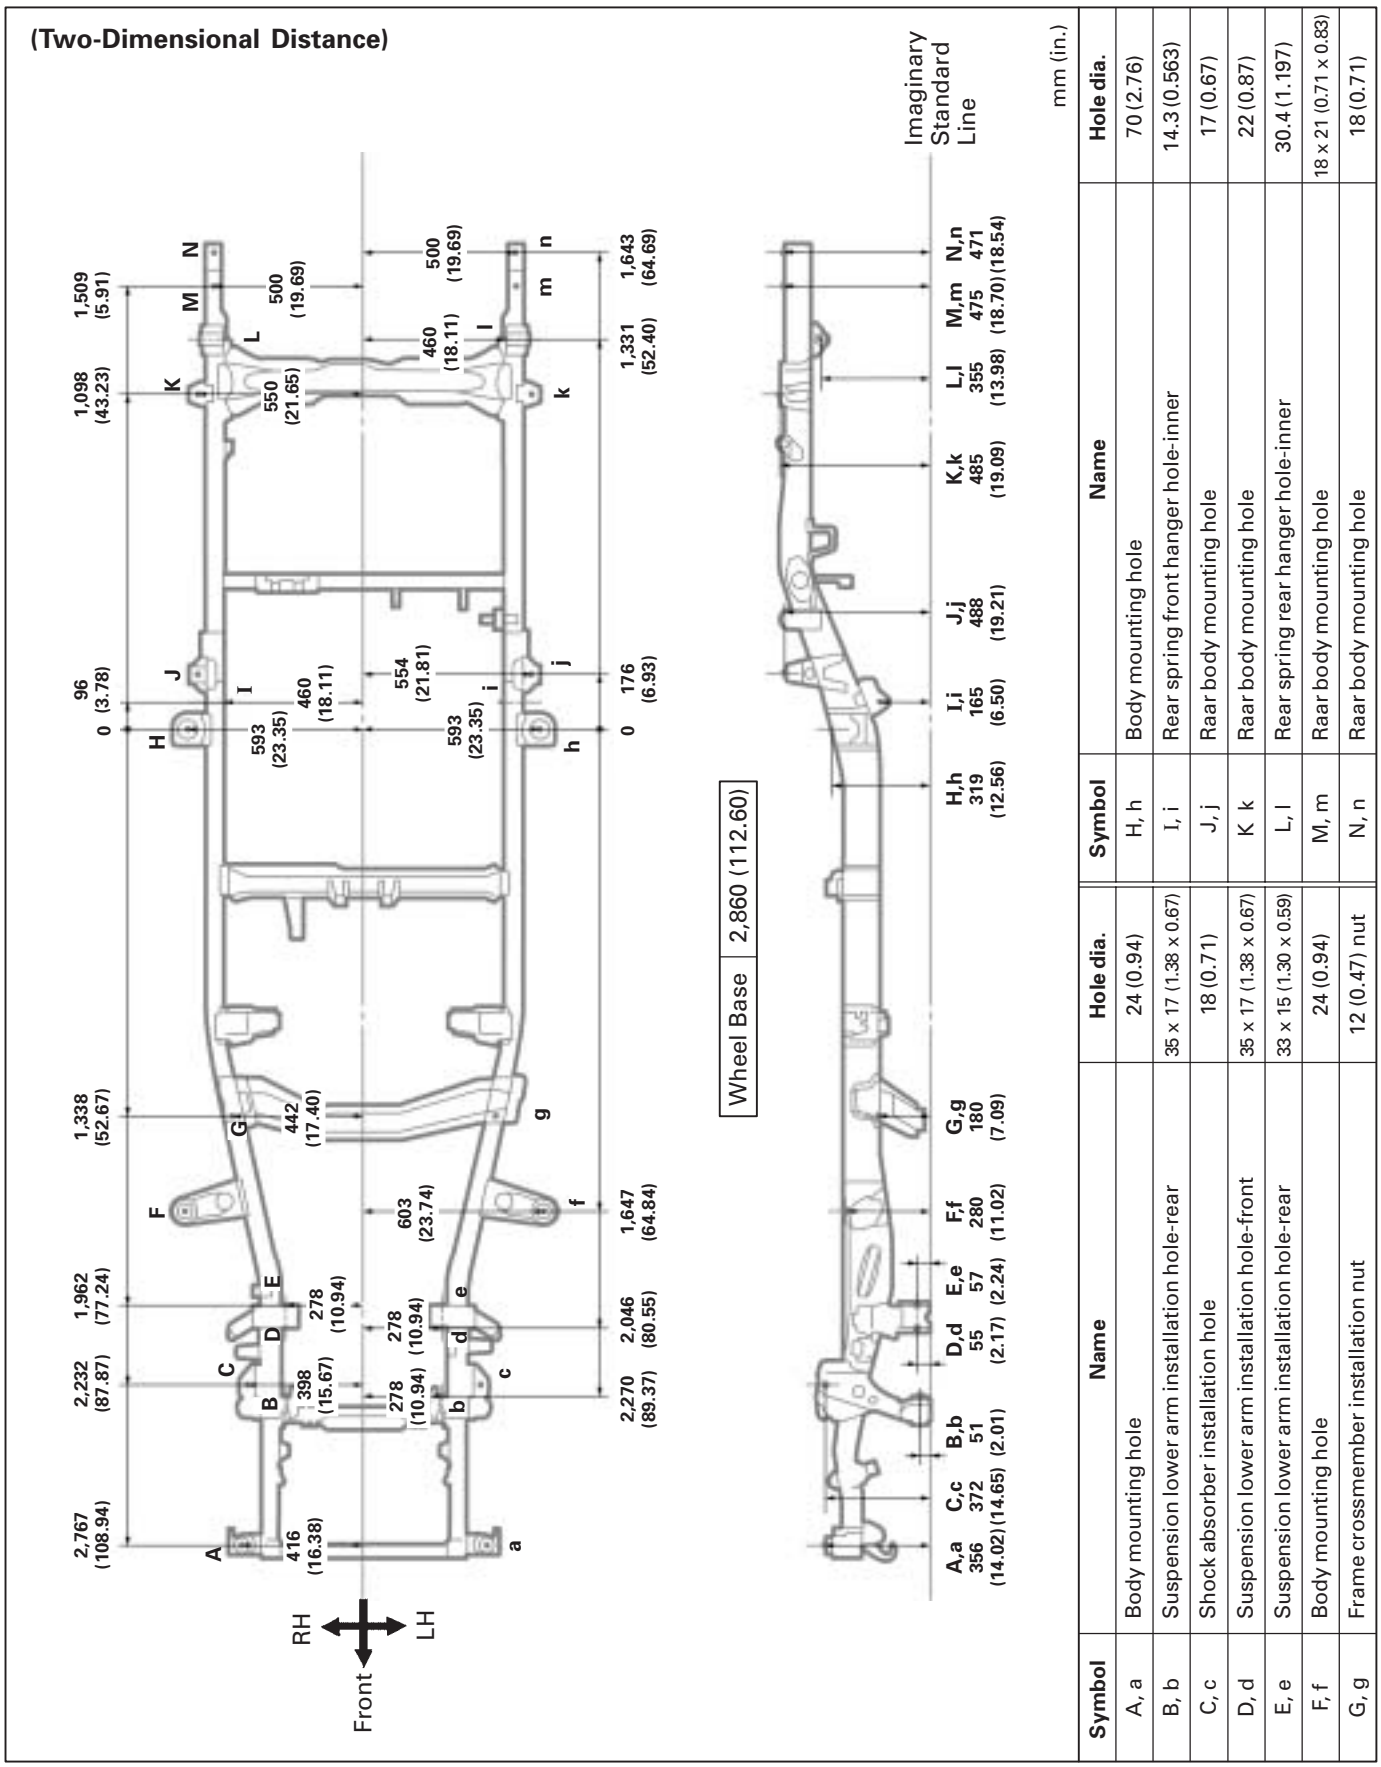


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	H, h	Body mounting hole	70 (2.76)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)	I, i	Rear spring front hanger hole-inner	14.3 (0.563)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Raar body mounting hole	17 (0.67)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)	K k	Raar body mounting hole	22 (0.87)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)	L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
F, f	Body mounting hole	24 (0.94)	M, m	Raar body mounting hole	18 x 21 (0.71 x 0.83)
G, g	Frame crossmember installation nut	12 (0.47) nut	N, n	Raar body mounting hole	18 (0.71)

FRAME DIMENSION

4WD (Except Thailand)

(Three-Dimensional Distance)

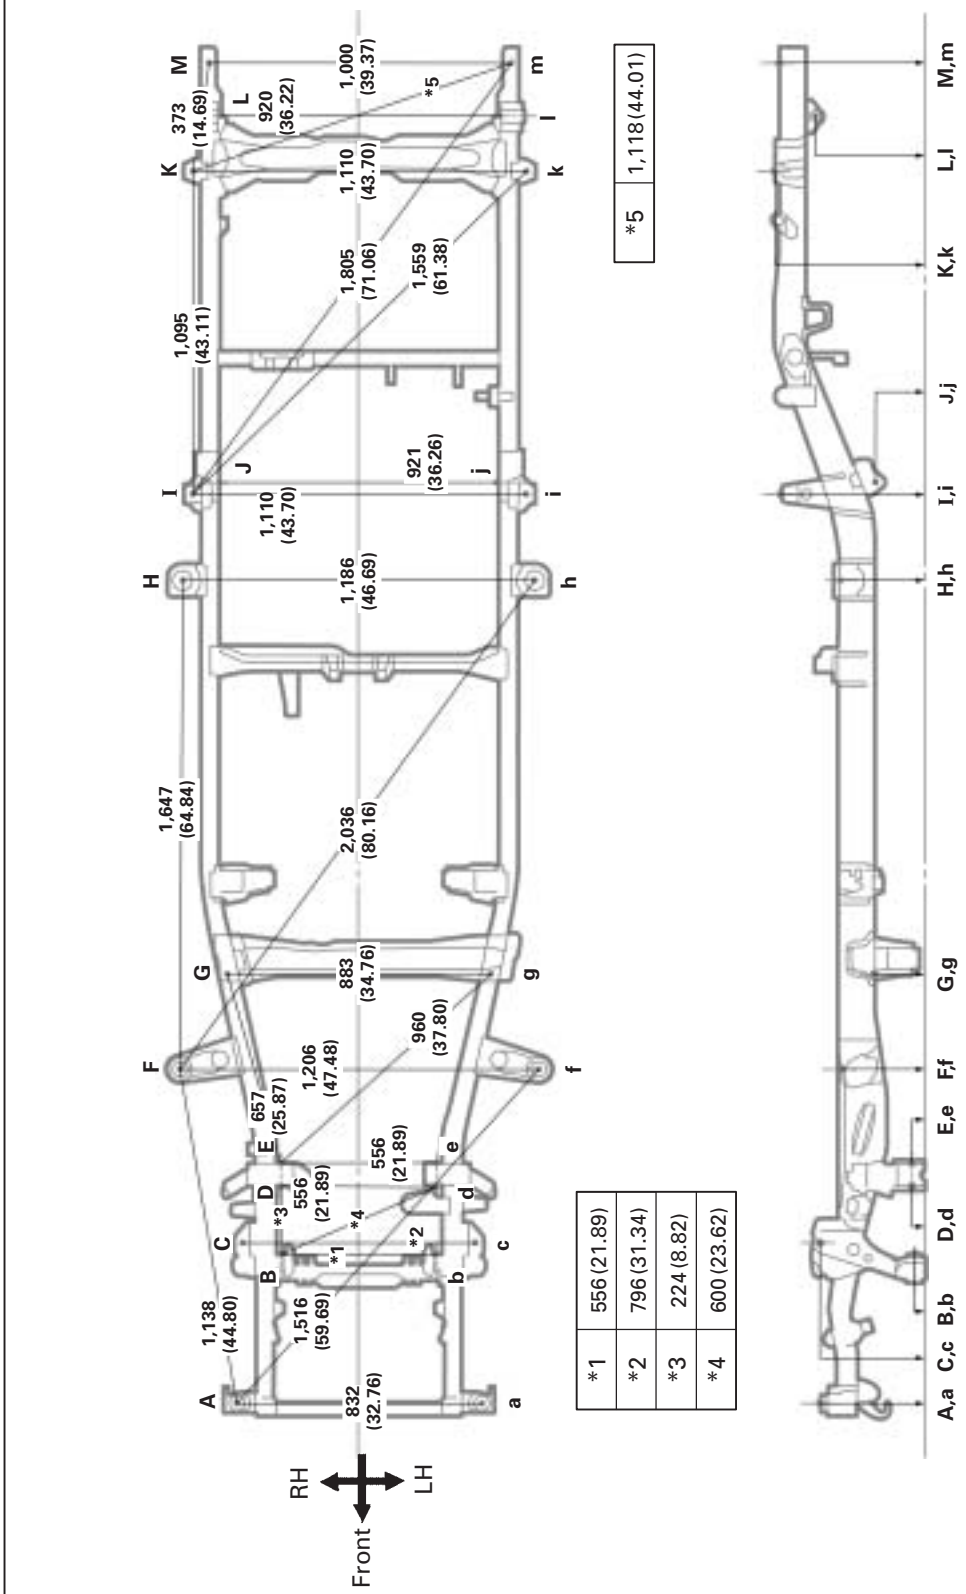

*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)
*4	600 (23.62)

*5	1,118 (44.01)

mm (in.)


Symbol	Name	Hole dia.
A, a	Body mounting hose	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)
F, f	Body mounting hole	24 (0.94)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Body mounting hole	70 (2.76)
I, i	Rear body mounting hole	22 (0.87)
J, j	Rear spring front hanger hole-inner	14.3 (0.563)
K k	Rear body mounting hole	22 (0.87)
L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
M, m	Rear body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION

4WD (Except Thailand) (Cont'd)

(Two-Dimensional Distance)

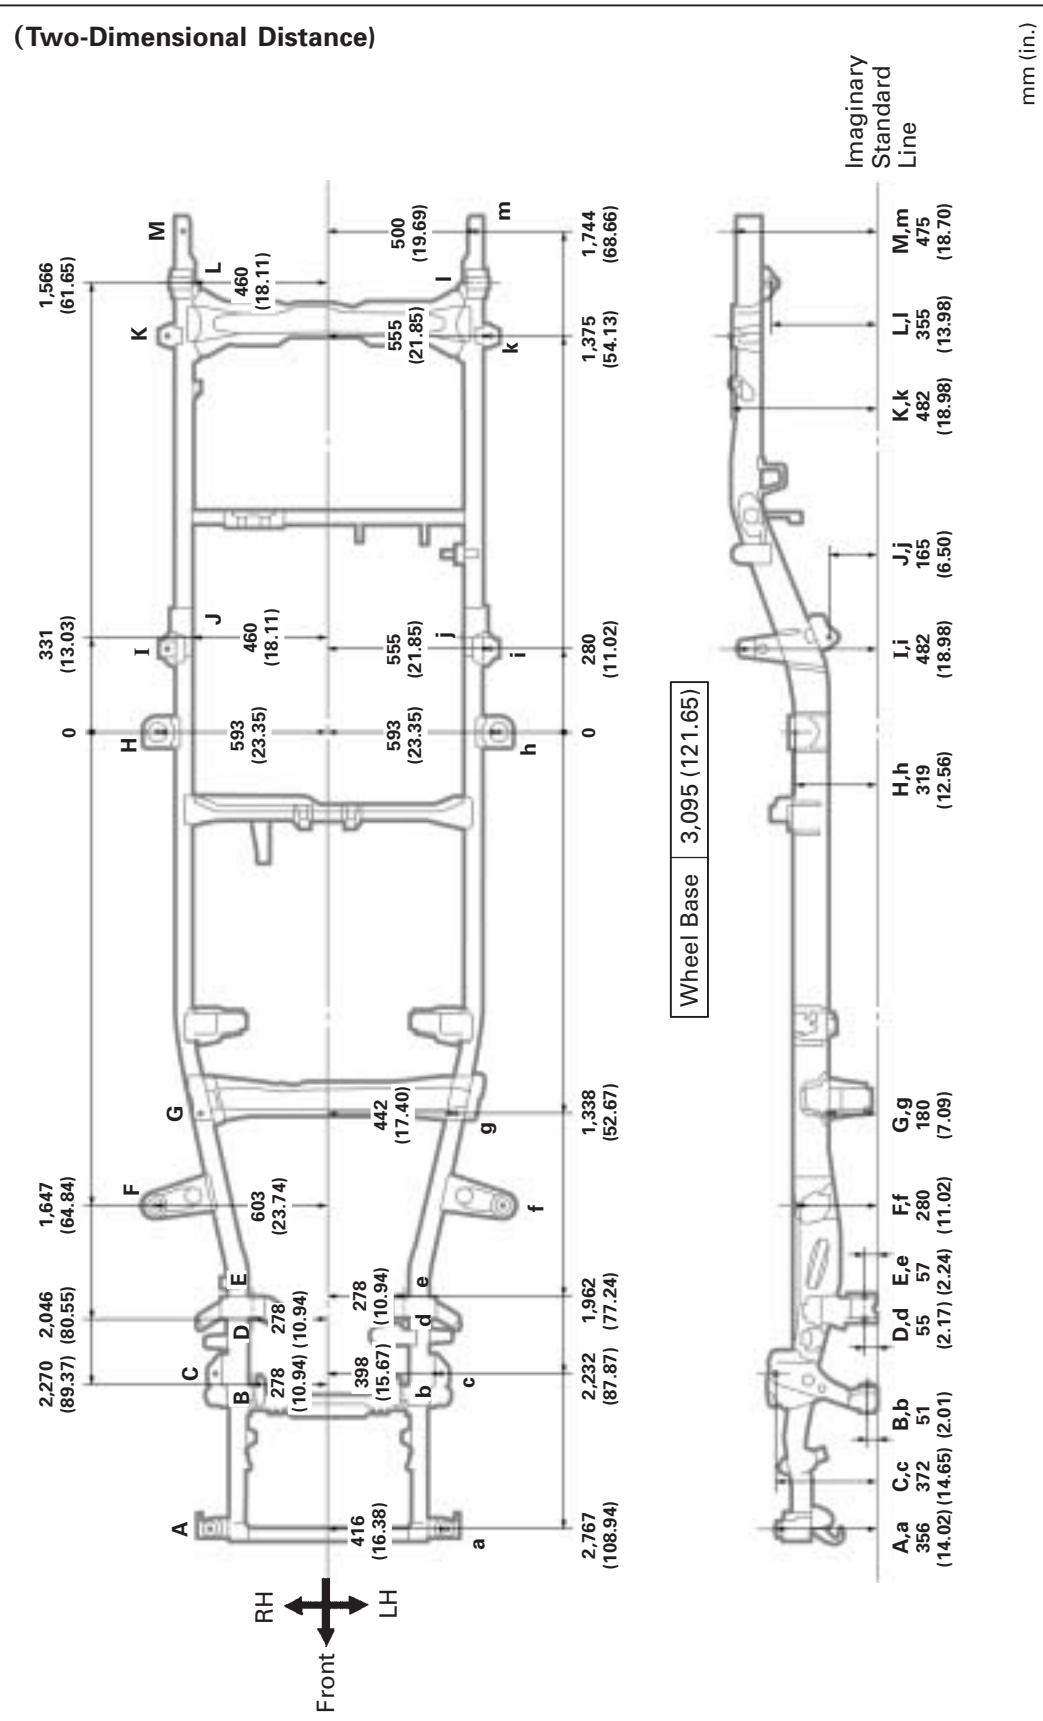

mm (in.)

Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)
F, f	Body mounting hole	24 (0.94)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Body mounting hole	70 (2.76)
I, i	Raar body mounting hole	22 (0.87)
J, j	Rear spring front hanger hole-inner	14.3 (0.563)
K k	Raar body mounting hole	22 (0.87)
L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
M, m	Raar body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION

4WD (For Thailand)

(Three-Dimensional Distance)

*1	556 (21.89)
*2	796 (31.34)
*3	224 (8.82)
*4	600 (23.62)

*5	921 (36.26)

*6	1,183 (46.57)

mm (in.)


Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)
C, c	Shock absorber installation hole	18 (0.71)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)
F, f	Body mounting hole	24 (0.94)
G, g	Frame crossmember installation nut	12 (0.47) nut

Symbol	Name	Hole dia.
H, h	Body mounting hole	70 (2.76)
I, i	Rear spring front hanger hole-inner	14.3 (0.563)
J, j	Rear body mounting hole	17 (0.67)
K k	Rear body mounting hole	22 (0.87)
L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
M, m	Rear body mounting hole	18 x 21 (0.71 x 0.83)
N, n	Rear body mounting hole	18 (0.71)

FRAME DIMENSION

4WD (For Thailand) (Cont'd)

(Two-Dimensional Distance)

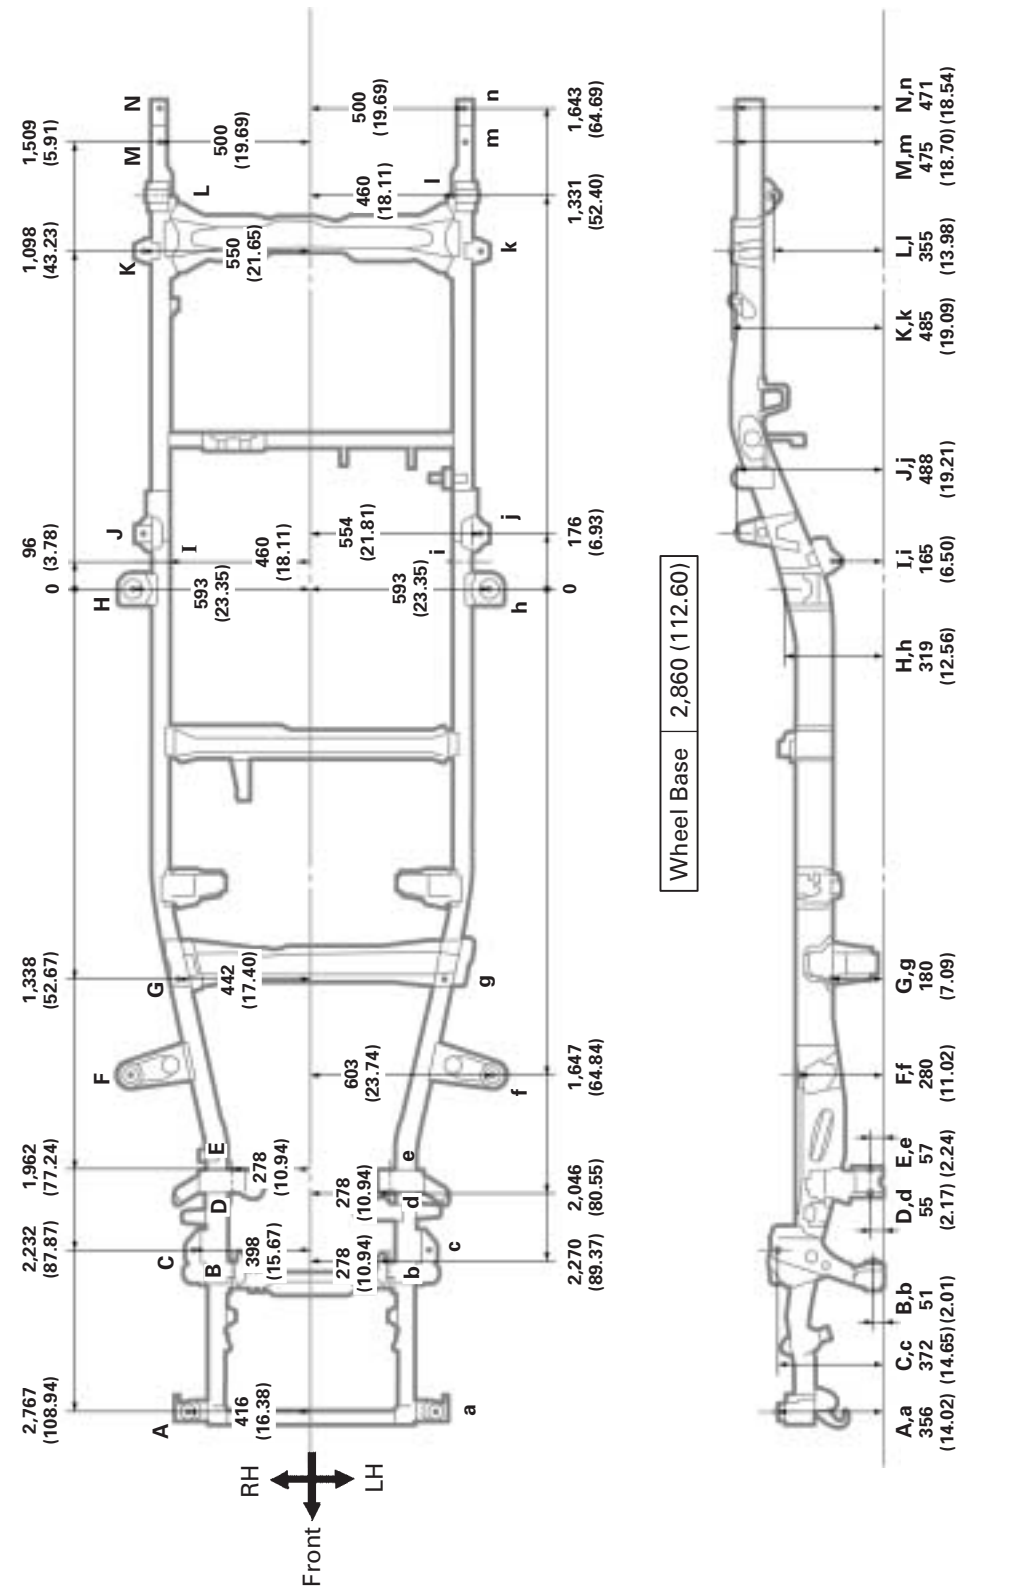


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	H, h	Body mounting hole	70 (2.76)
B, b	Suspension lower arm installation hole-rear	35 x 17 (1.38 x 0.67)	I, i	Rear spring front hanger hole-inner	14.3 (0.563)
C, c	Shock absorber installation hole	18 (0.71)	J, j	Raar body mounting hole	17 (0.67)
D, d	Suspension lower arm installation hole-front	35 x 17 (1.38 x 0.67)	K k	Raar body mounting hole	22 (0.87)
E, e	Suspension lower arm installation hole-rear	33 x 15 (1.30 x 0.59)	L, l	Rear spring rear hanger hole-inner	30.4 (1.197)
F, f	Body mounting hole	24 (0.94)	M, m	Raar body mounting hole	18 x 21 (0.71 x 0.83)
G, g	Frame crossmember installation nut	12 (0.47) nut	N, n	Raar body mounting hole	18 (0.71)

FRAME DIMENSION – Upper Face

2WD (Except Thailand)

(Three-Dimensional Distance)

mm (in.)

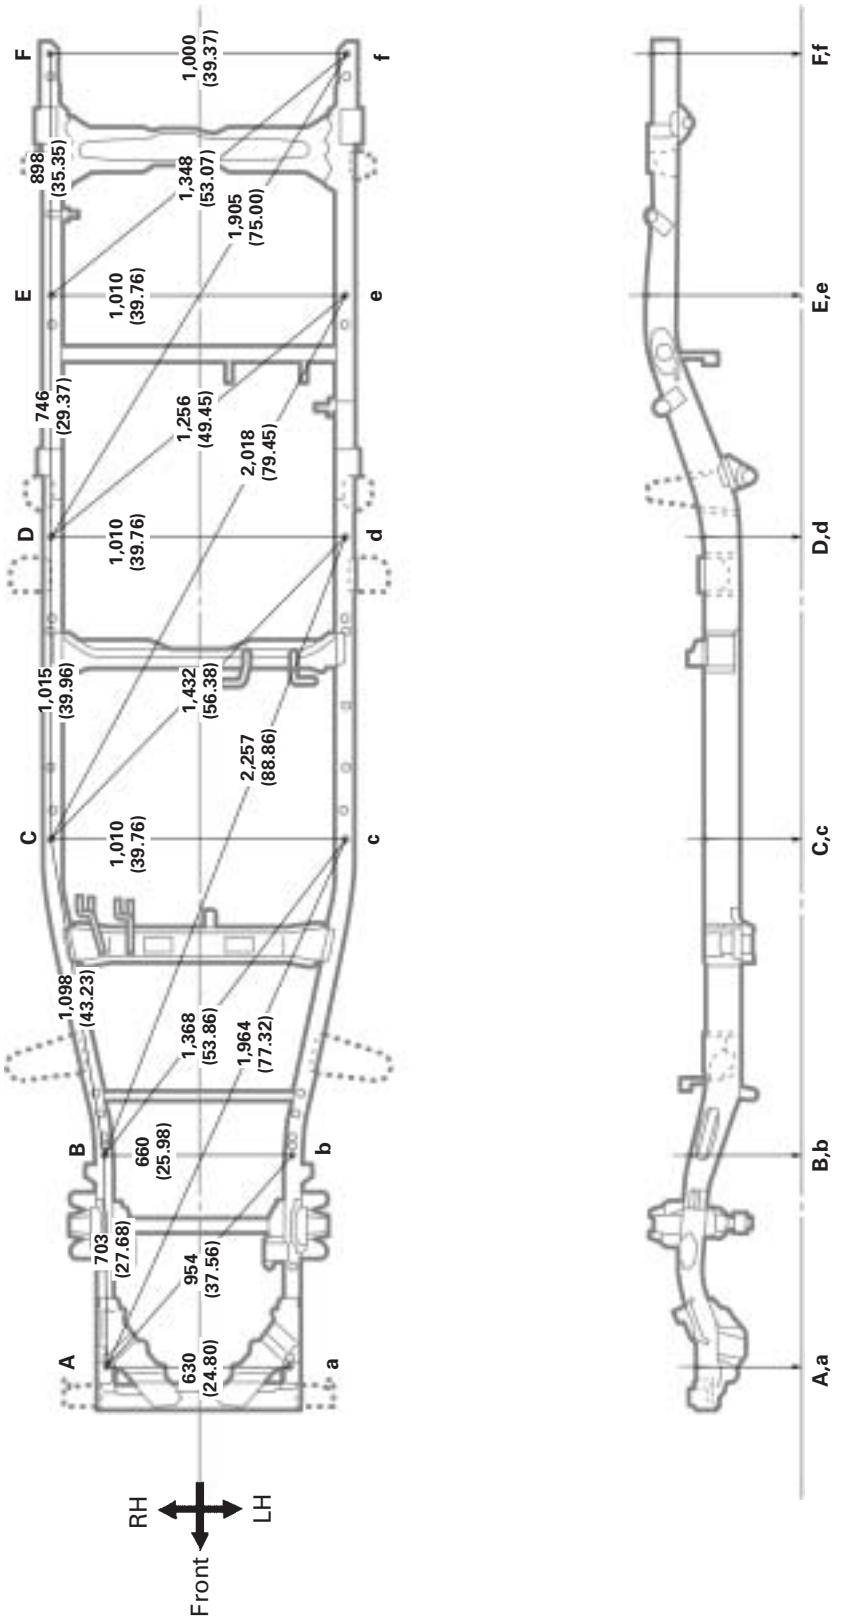


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Raar body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Upper Face
2WD (Except Thailand) (Cont'd)

(Two-Dimensional Distance)

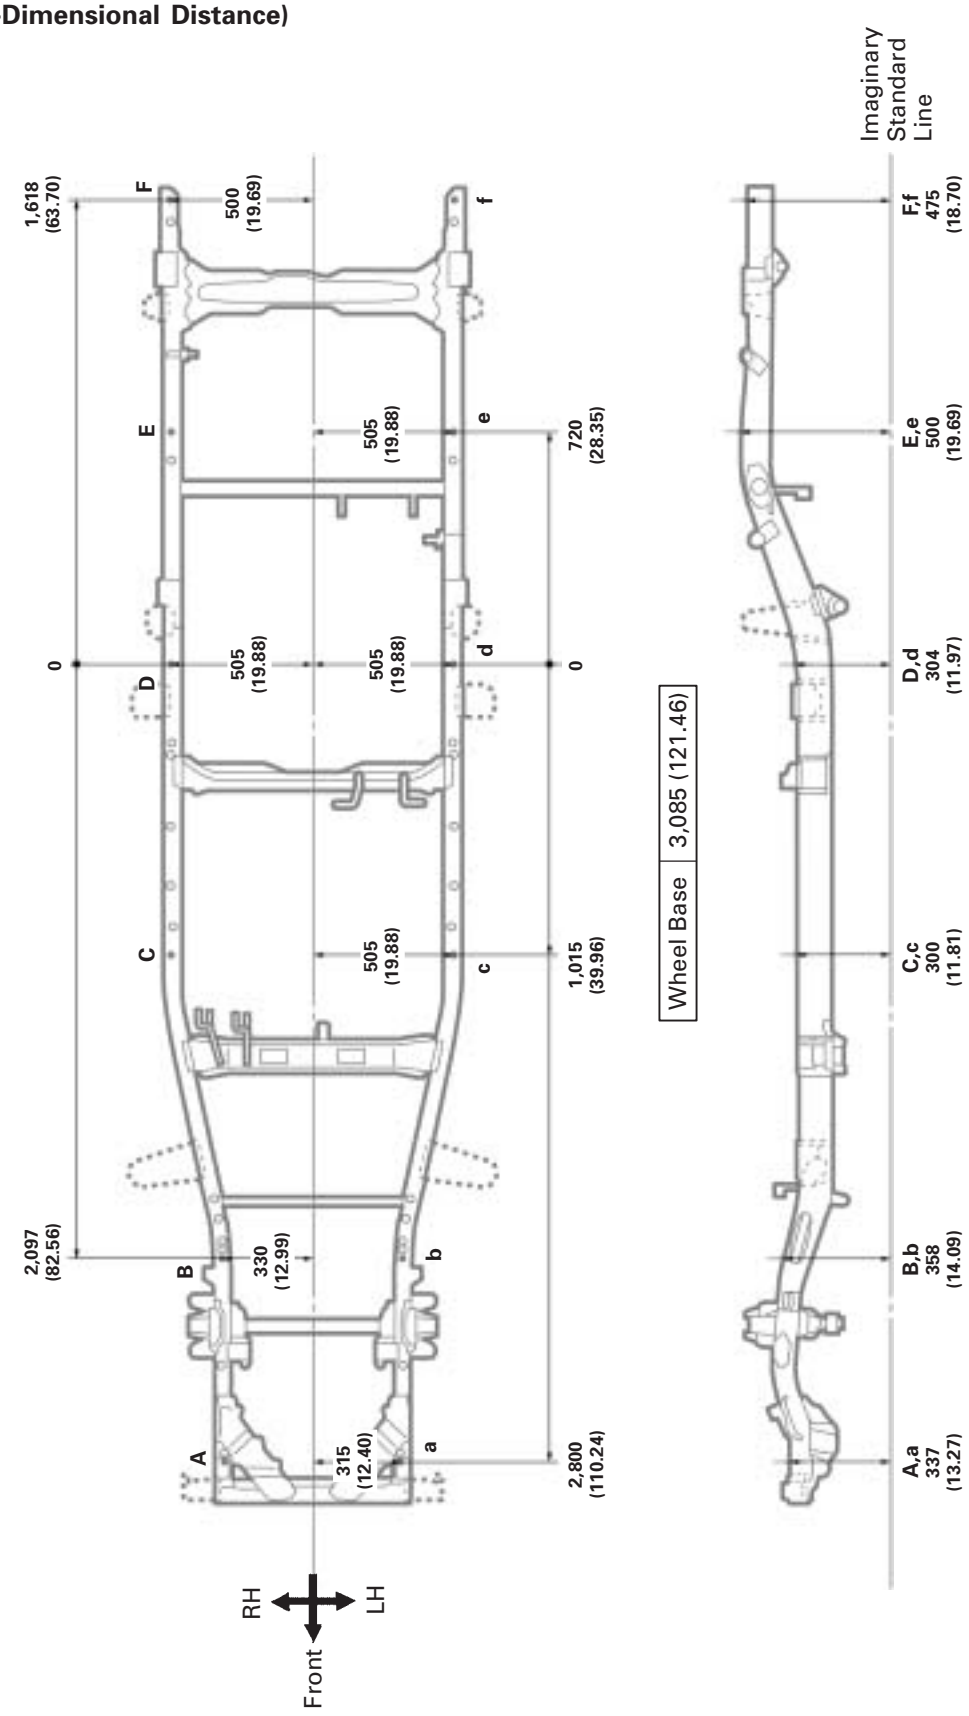

mm (in.)

Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)


Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Raar body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Lower Face

2WD (Except Thailand)

(Three-Dimensional Distance)

mm (in.)

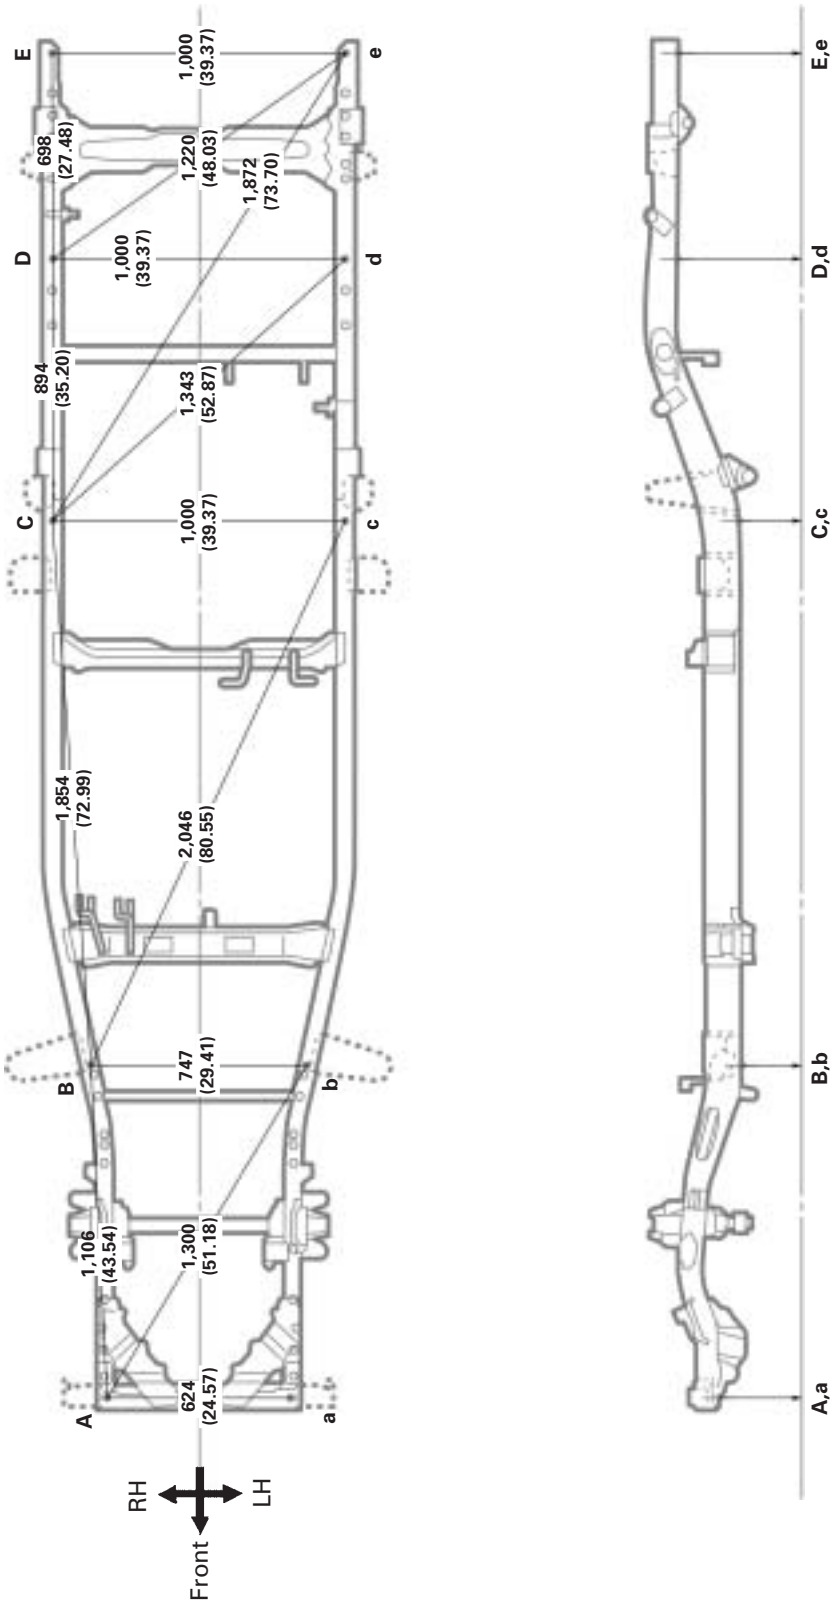



Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Raar body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Lower Face
2WD (Except Thailand) (Cont'd)

(Two-Dimensional Distance)

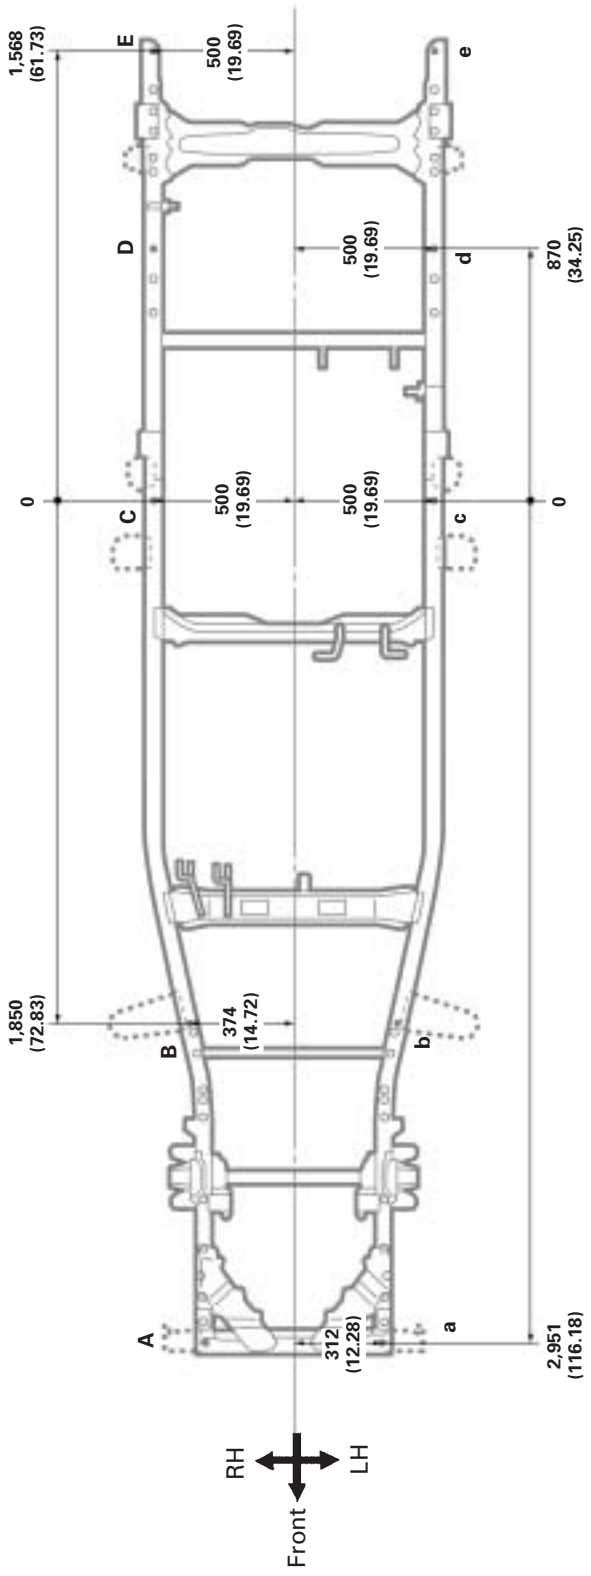

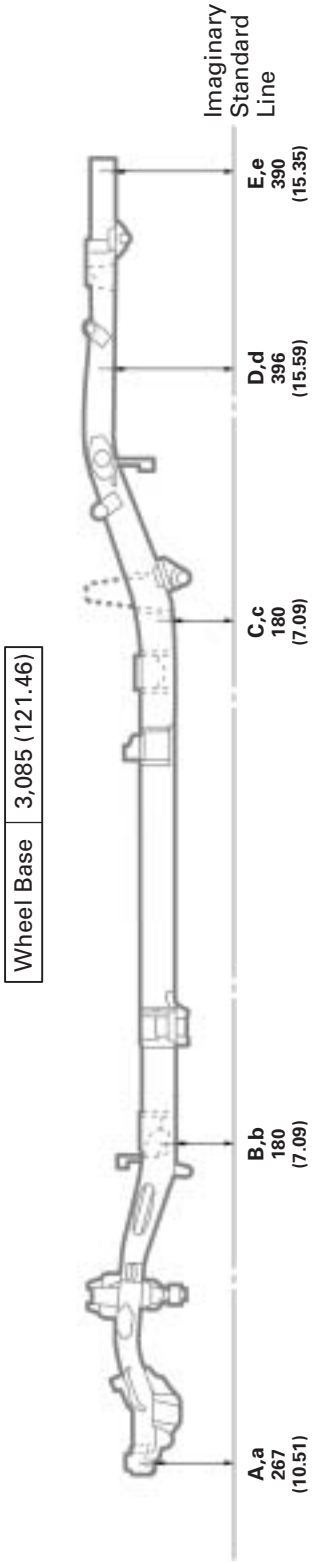

Wheel Base | 3,085 (121.46)

mm (in.)

Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)


Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Raar body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Upper Face

2WD (For Thailand)

(Three-Dimensional Distance)

mm (in.)

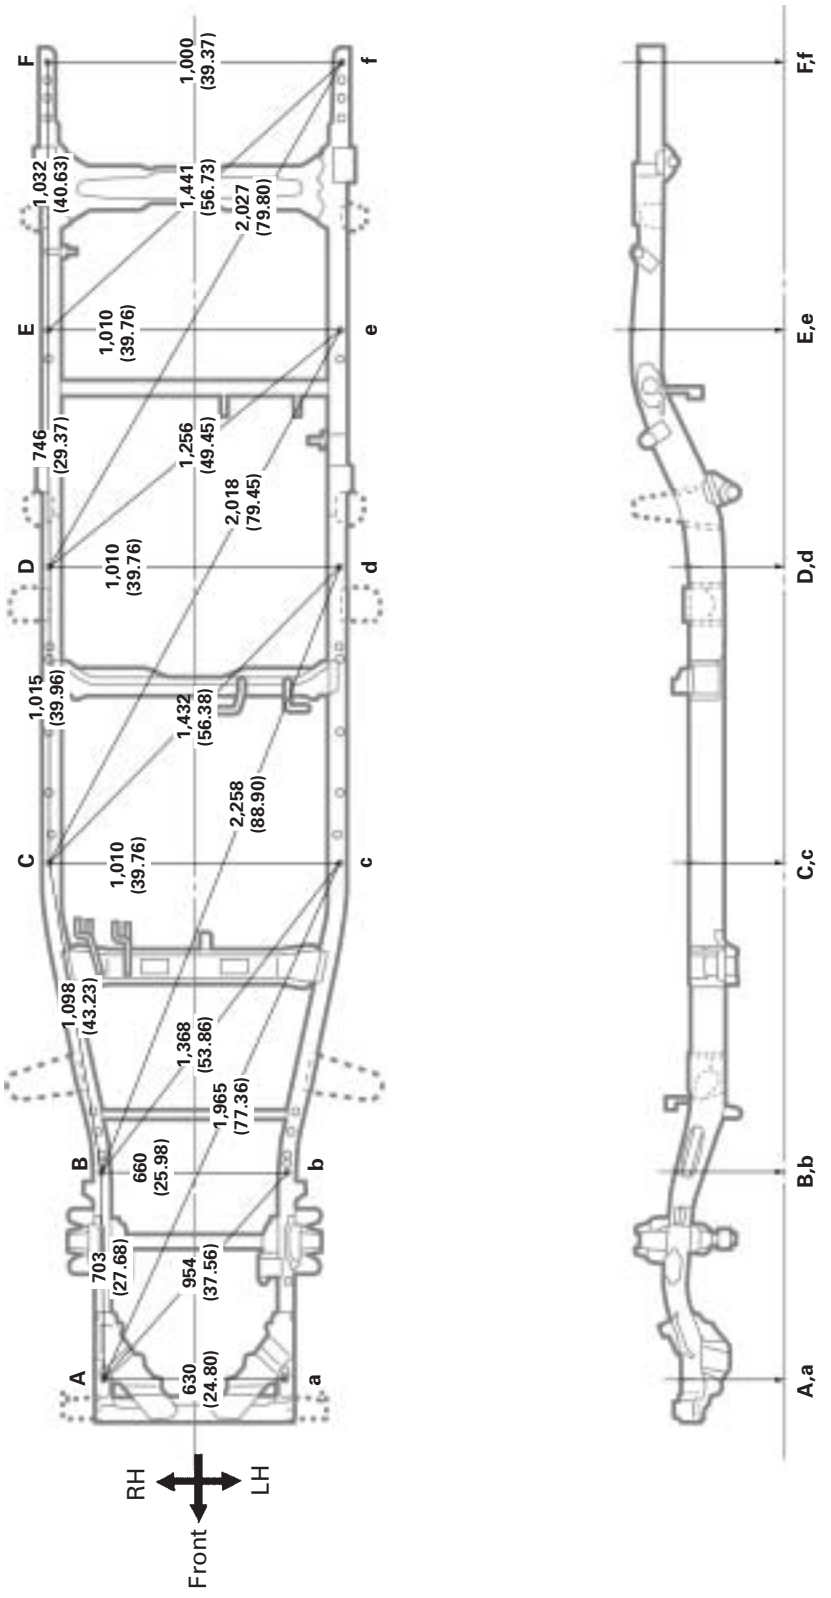


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Raar body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Upper Face
2WD (For Thailand) (Cont'd)

(Two-Dimensional Distance)

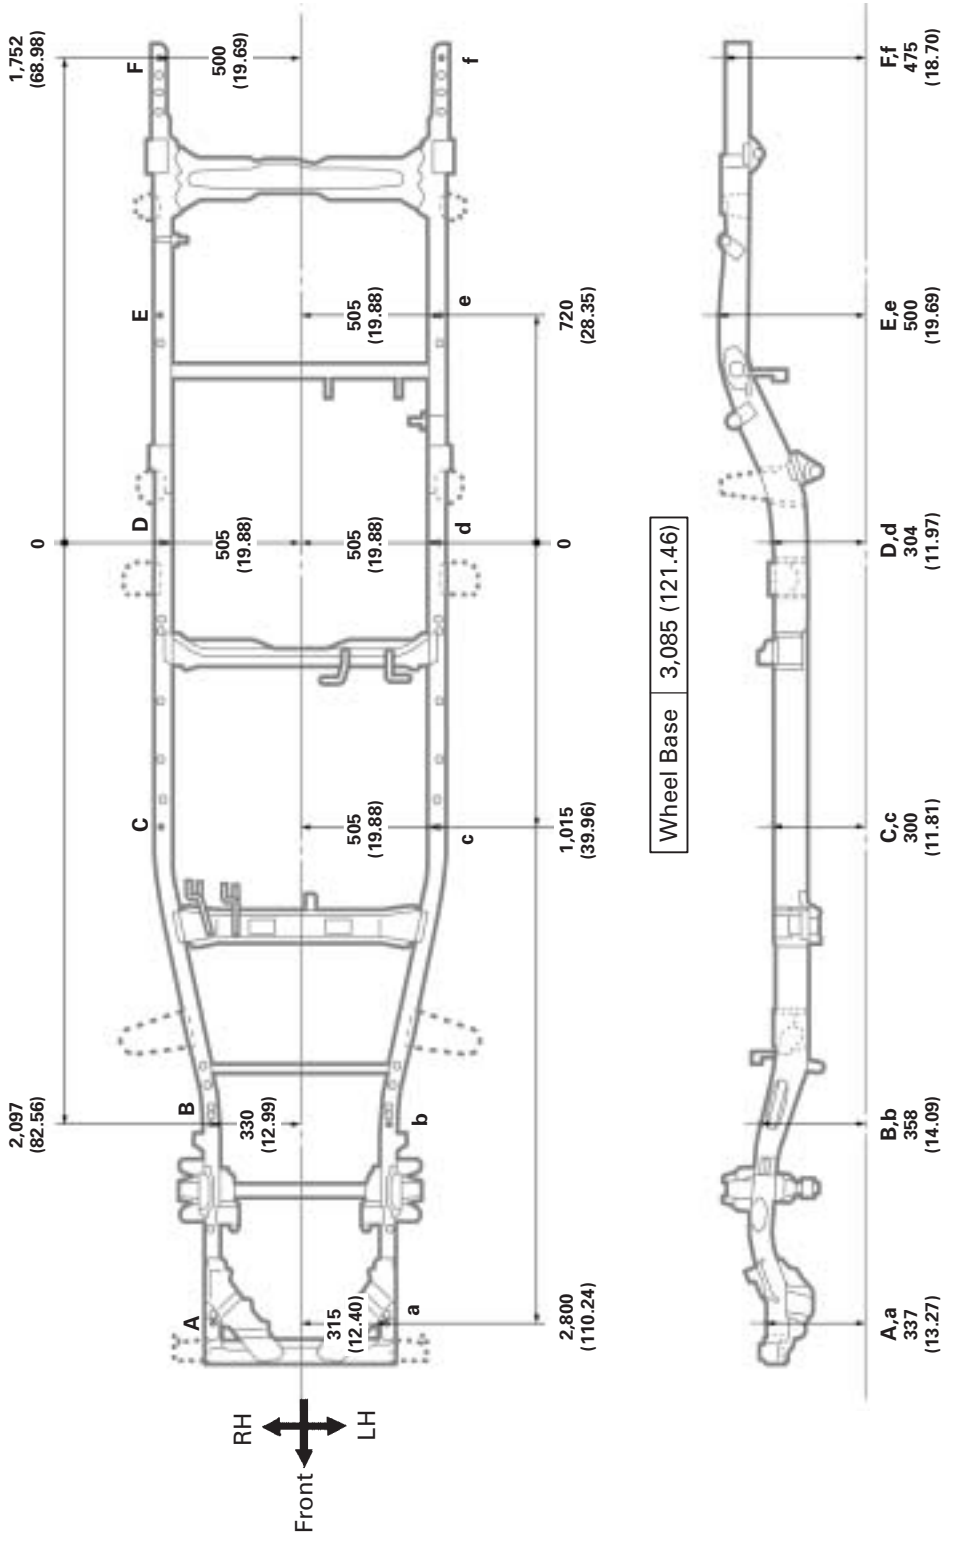


mm (in.)

Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Flexible hose bracket installation nut	8 (0.31) nut
C, c	Wire harness installation hole	7 (0.28)

Symbol	Name	Hole dia.
D, d	Wire harness installation hole	12 x 7 (0.47 x 0.28)
E, e	Frame side rail working hole	9 (0.35)
F, f	Raar body mounting hole	18 x 21 (0.71 x 0.83)

FRAME DIMENSION – Lower Face
2WD (For Thailand)

(Three-Dimensional Distance)

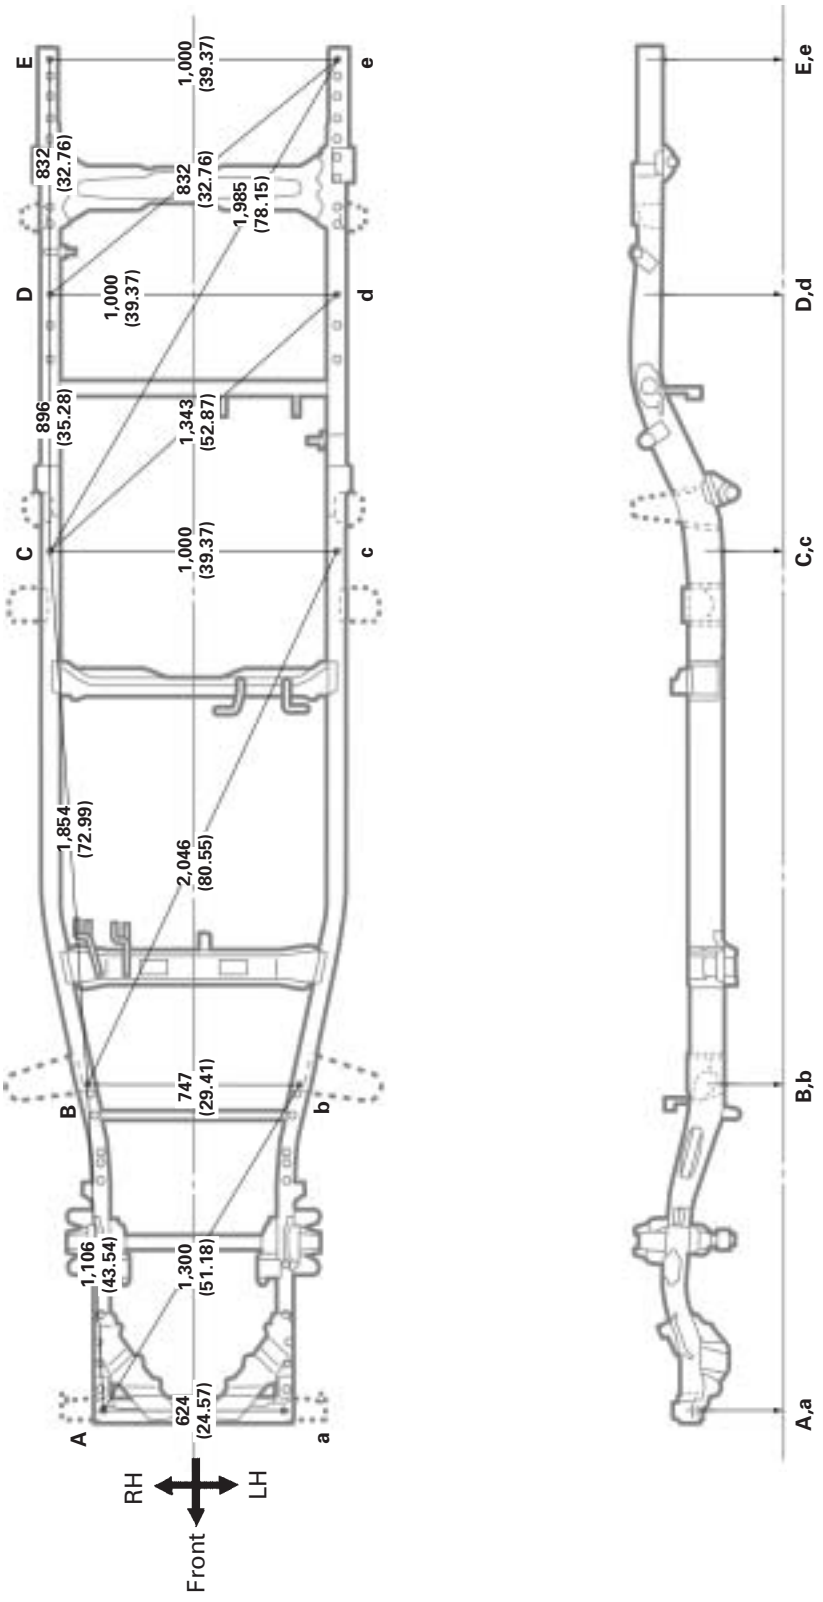


mm (in.)

Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Raar body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Lower Face
2WD (For Thailand) (Cont'd)

(Two-Dimensional Distance)

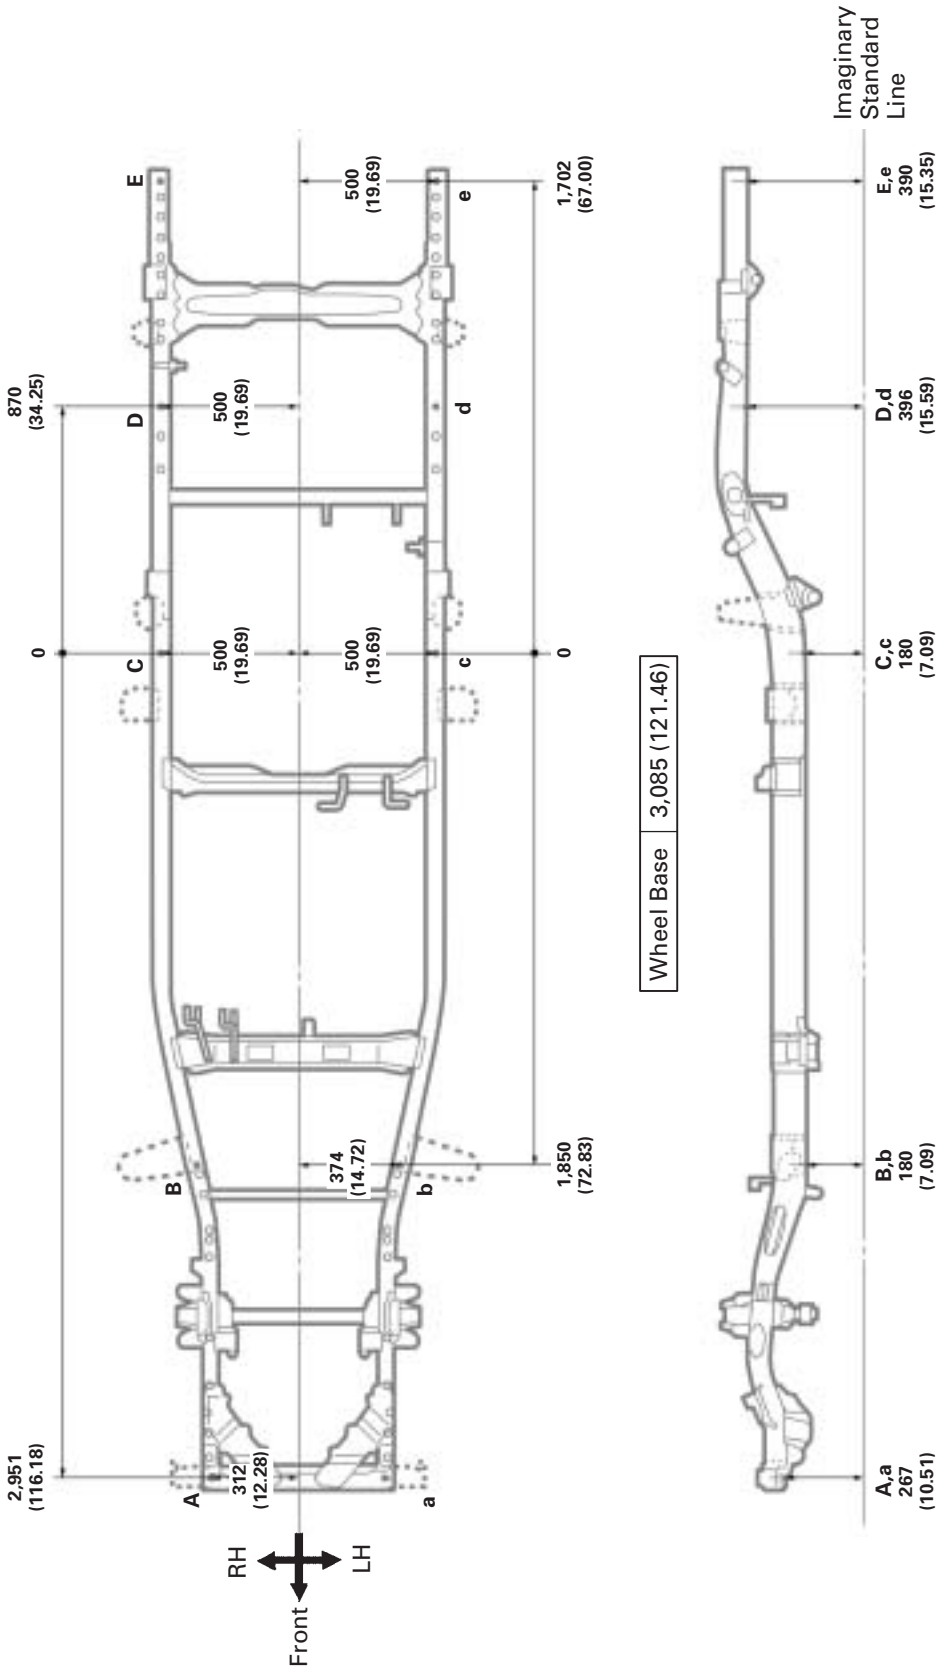

mm (in.)

Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Frame side rail working hole	14 (0.55)
C, c	Frame side rail working hole	9 (0.35)


Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Raar body mounting hole	28 x 31 (1.10 x 1.22)
—	—	—

FRAME DIMENSION – Upper Face

4WD (Except Thailand)

(Three-Dimensional Distance)

mm (in.)

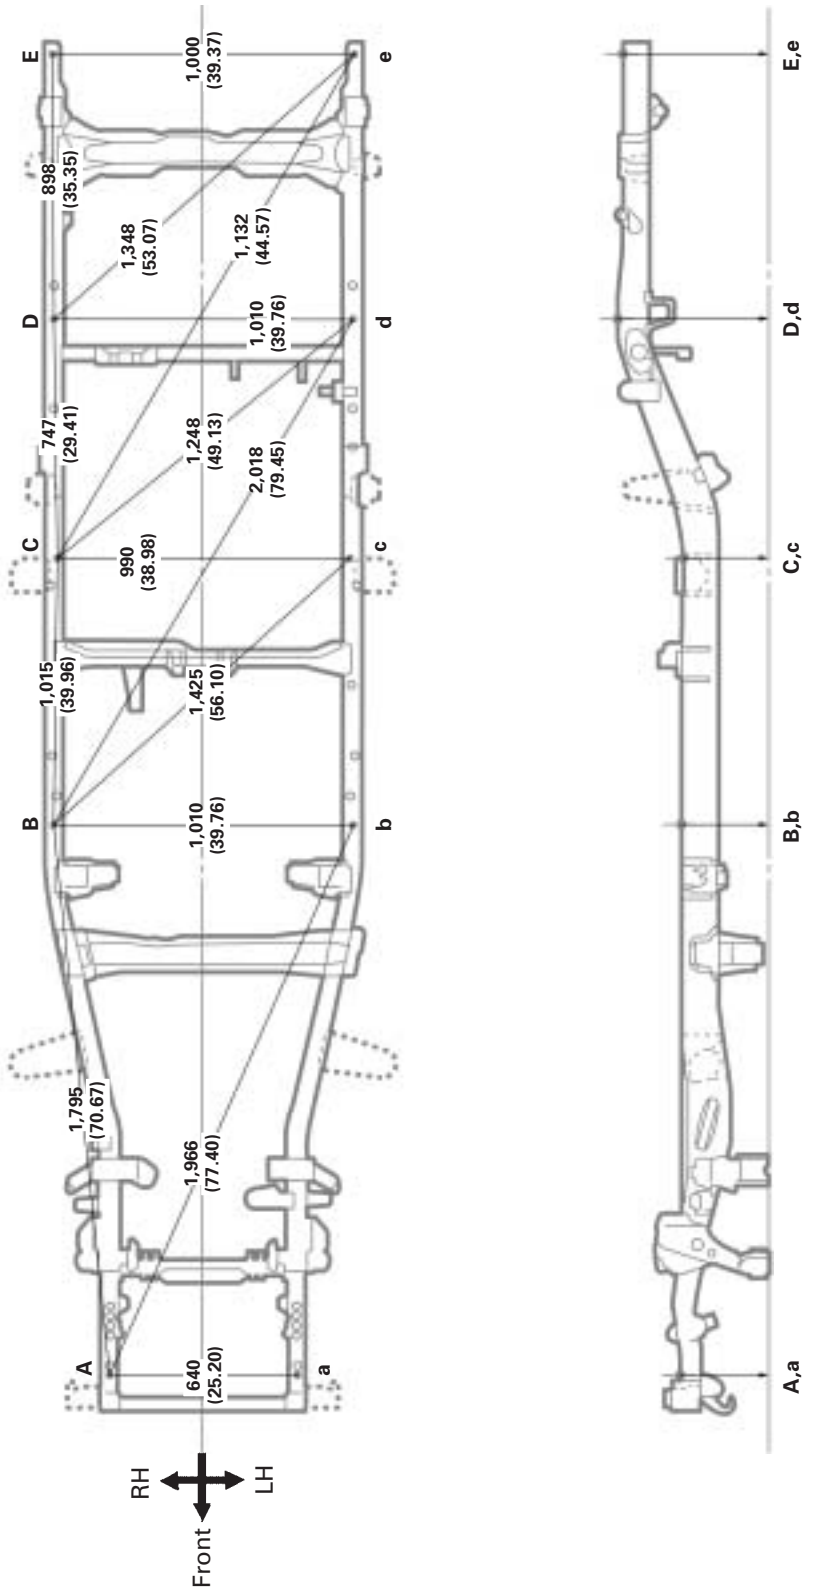


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Wire harness installation hole	7 (0.28)
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Raar body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION – Upper Face
4WD (Except Thailand) (Cont'd)

(Two-Dimensional Distance)

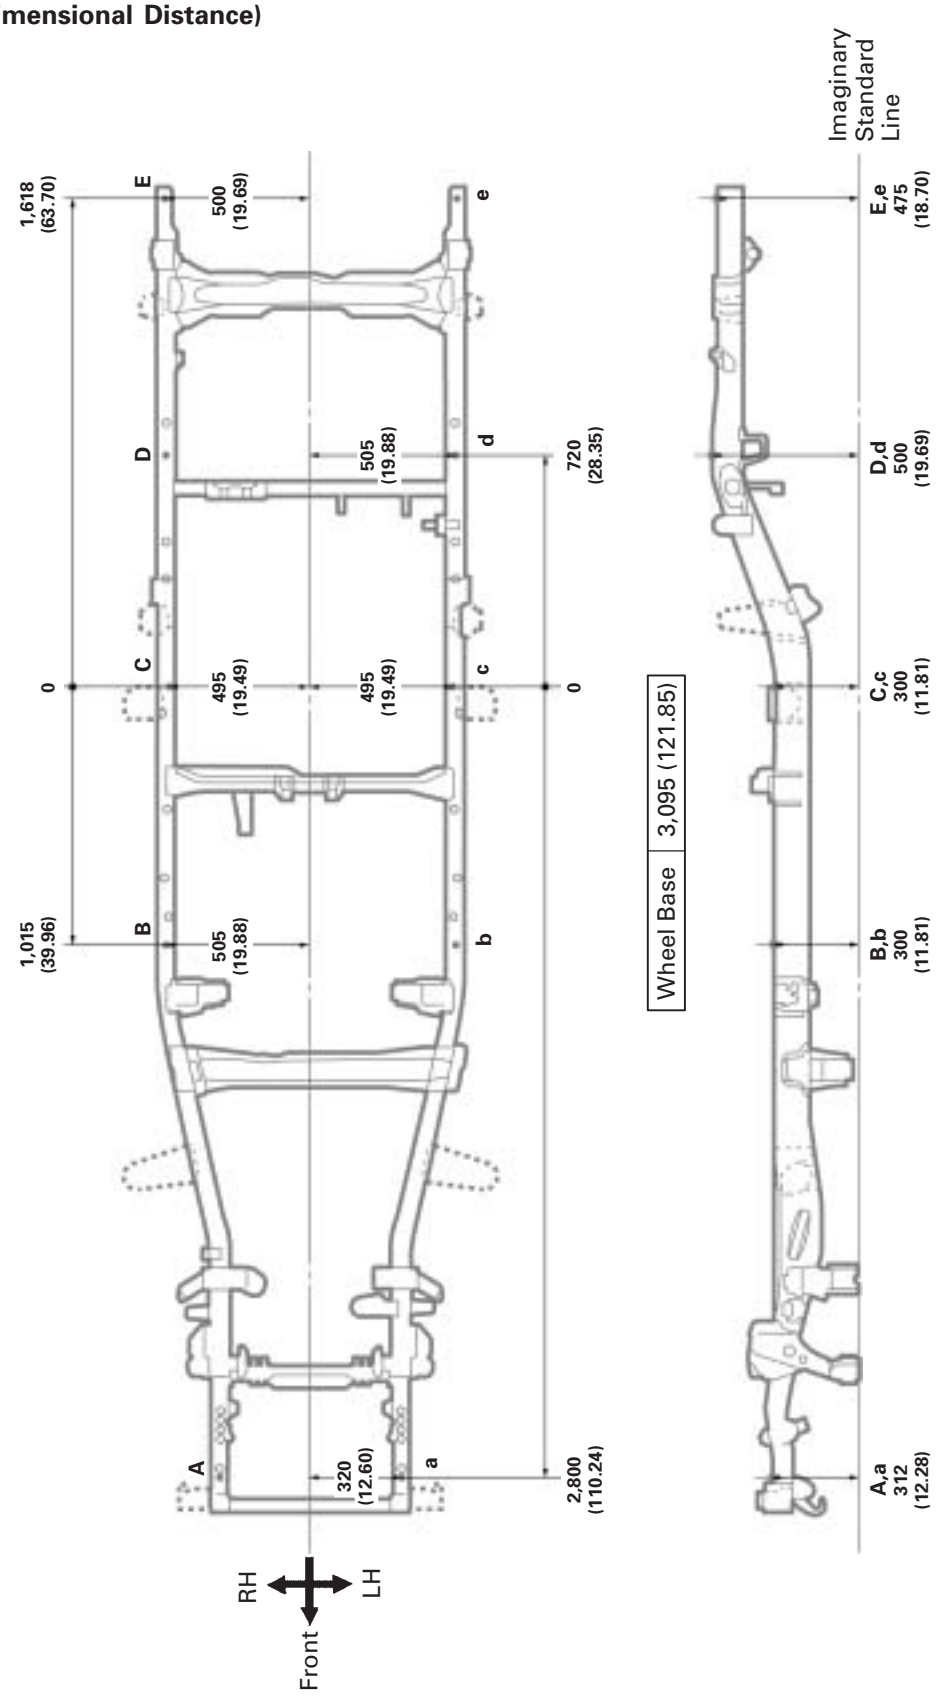

mm (in.)

Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31) nut
B, b	Wire harness installation hole	7 (0.28)
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)


Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Raar body mounting hole	18 x 21 (0.71 x 0.83)
—	—	—

FRAME DIMENSION – Lower Face

4WD (Except Thailand)

(Three-Dimensional Distance)

mm (in.)

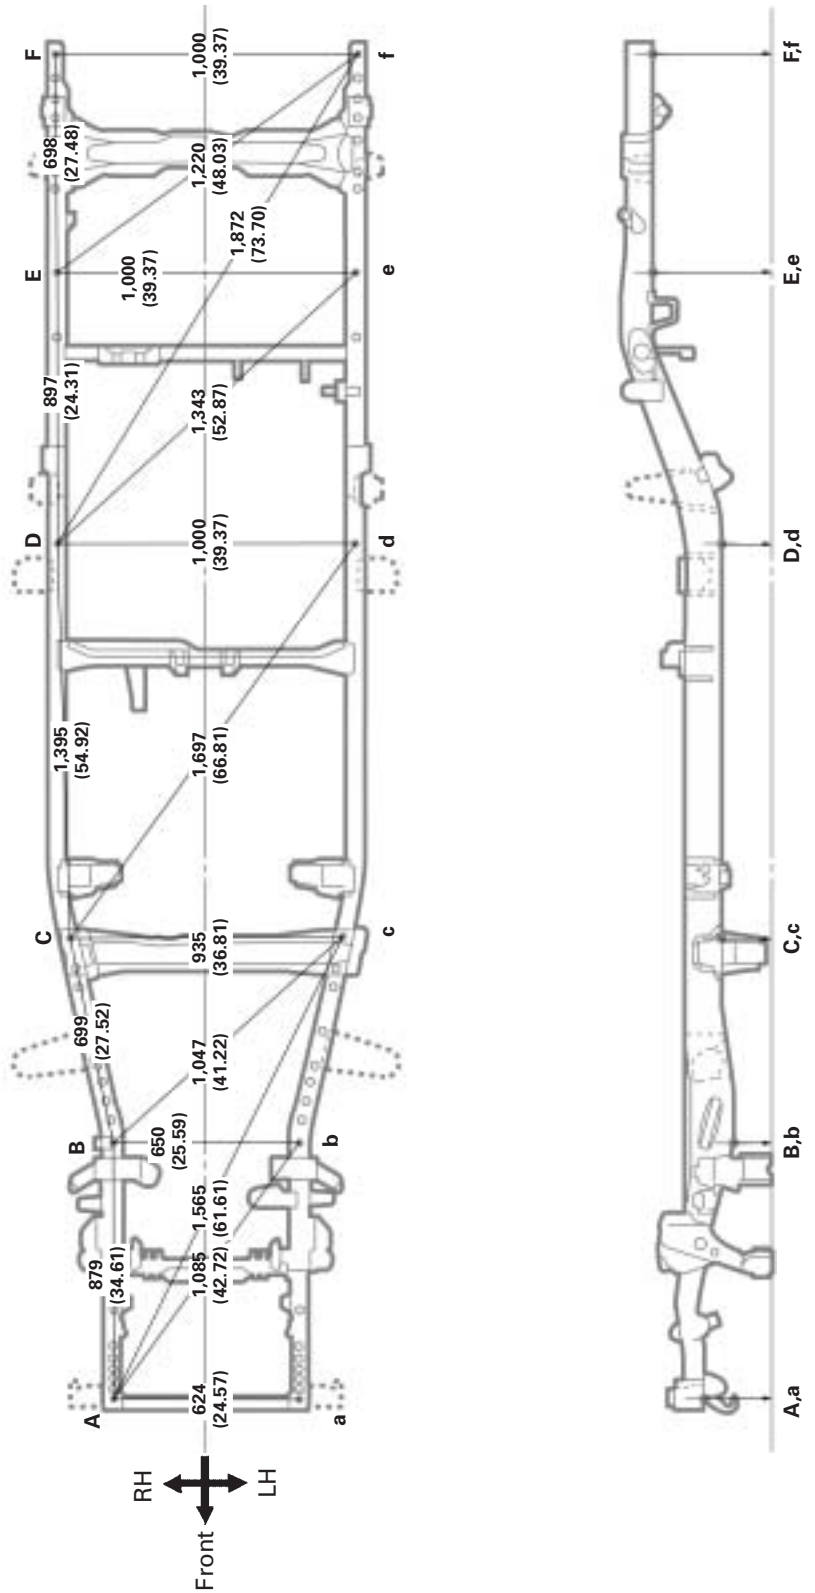


Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Stabilizer bracket installation nut	8 (0.31) nut
C, c	Frame crossmember installation nut	14 (0.55) nut

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Frame side rail working hole	9 (0.35)
F, f	Raar body mounting hole	28 x 31 (1.10 x 1.22)

FRAME DIMENSION – Lower Face
4WD (Except Thailand) (Cont'd)

(Two-Dimensional Distance)

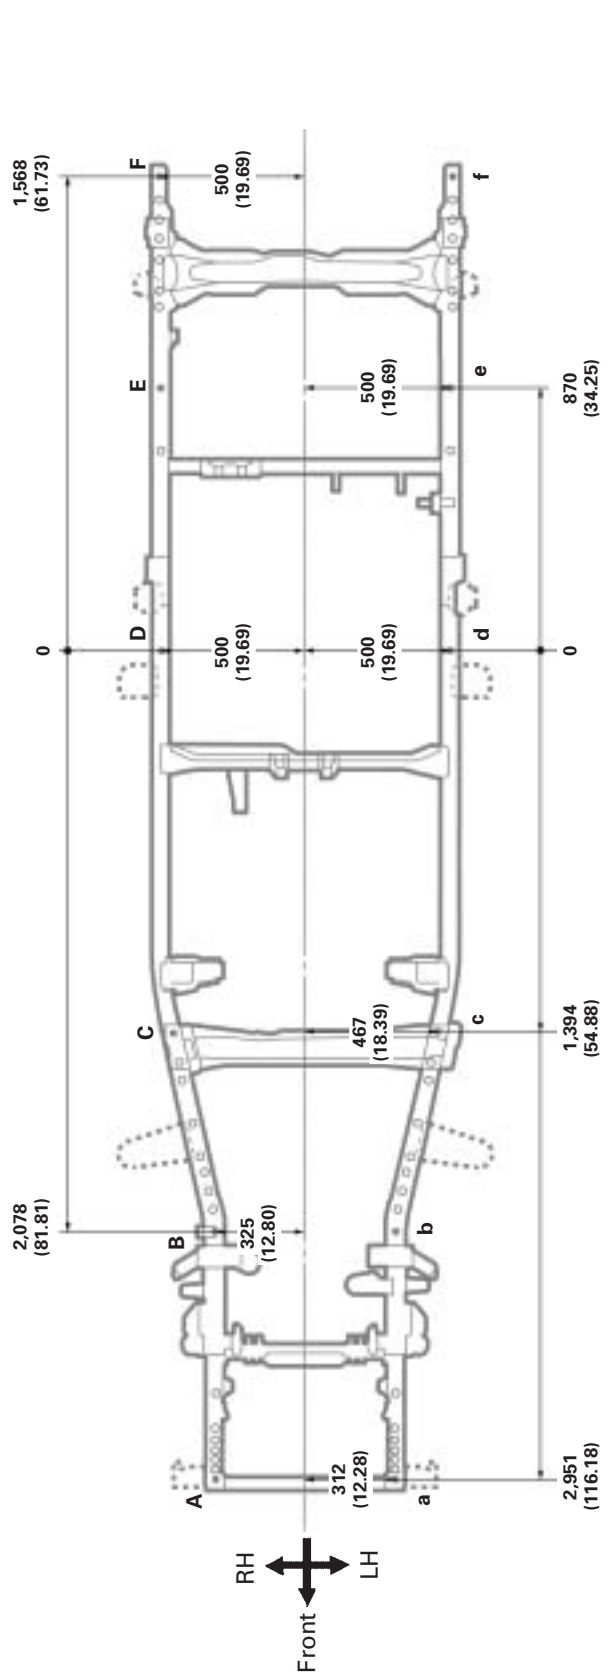

mm (in.)


Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Stabilizer bracket installation nut	8 (0.31) nut
C, c	Frame crossmember installation nut	14 (0.55) nut

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	28 x 31 (1.10 x 1.22)

FRAME DIMENSION – Upper Face
4WD (For Thailand) & 4WD STYLE 2WD

(Three-Dimensional Distance)

mm (in.)

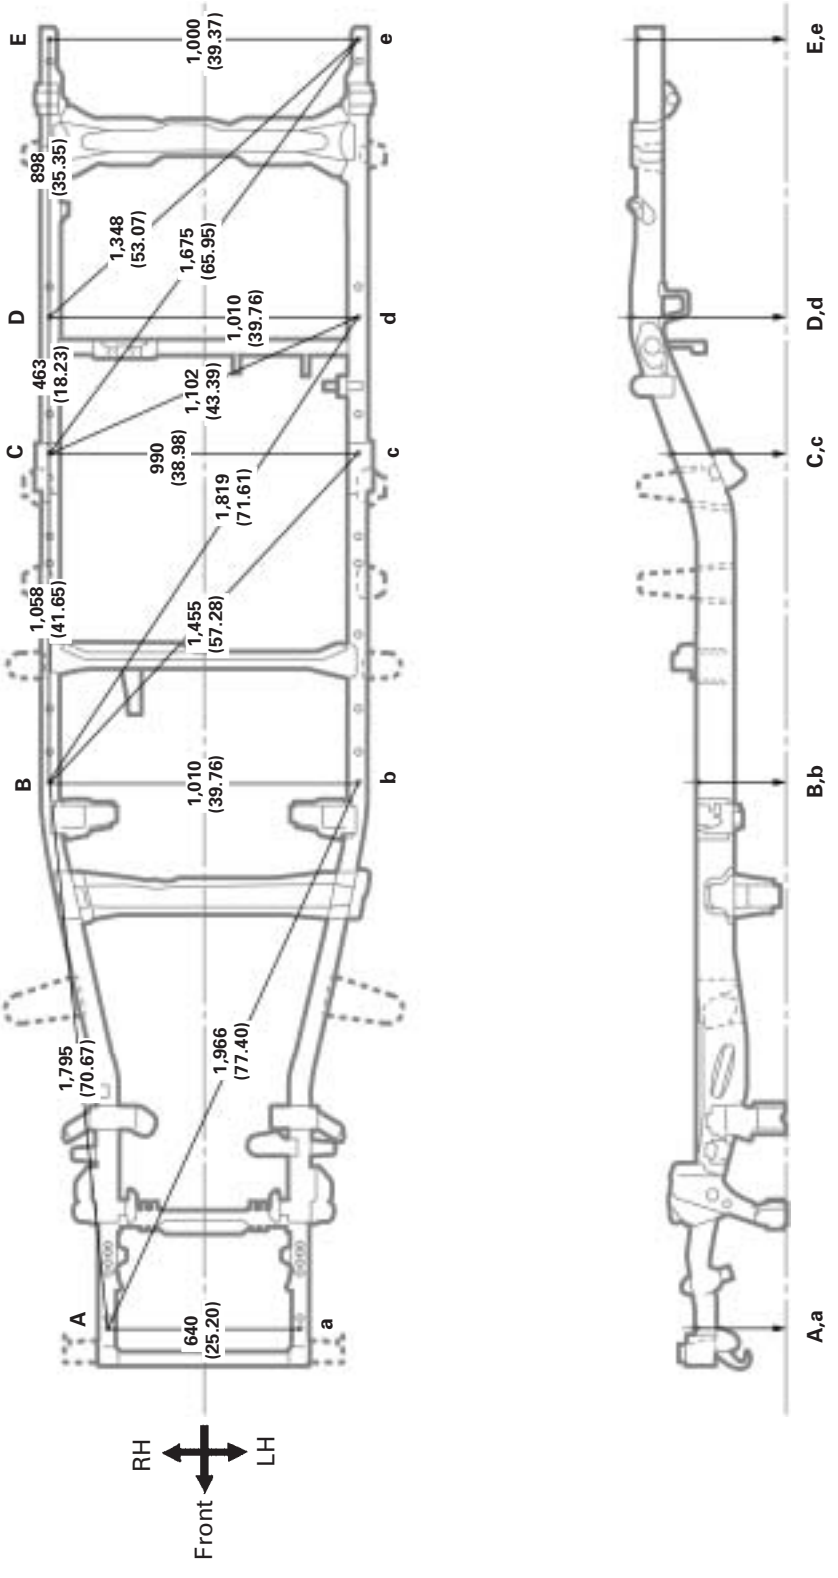


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31)nut
B, b	Wire harness installation hole	7 (0.28)
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9(0.35)
E, e	Rear body mounting hole	18 x 21(0.71 x 0.83)
—	—	—

FRAME DIMENSION – Upper Face
4WD (For Thailand) & 4WD STYLE 2WD (Cont'd)

(Two-Dimensional Distance)

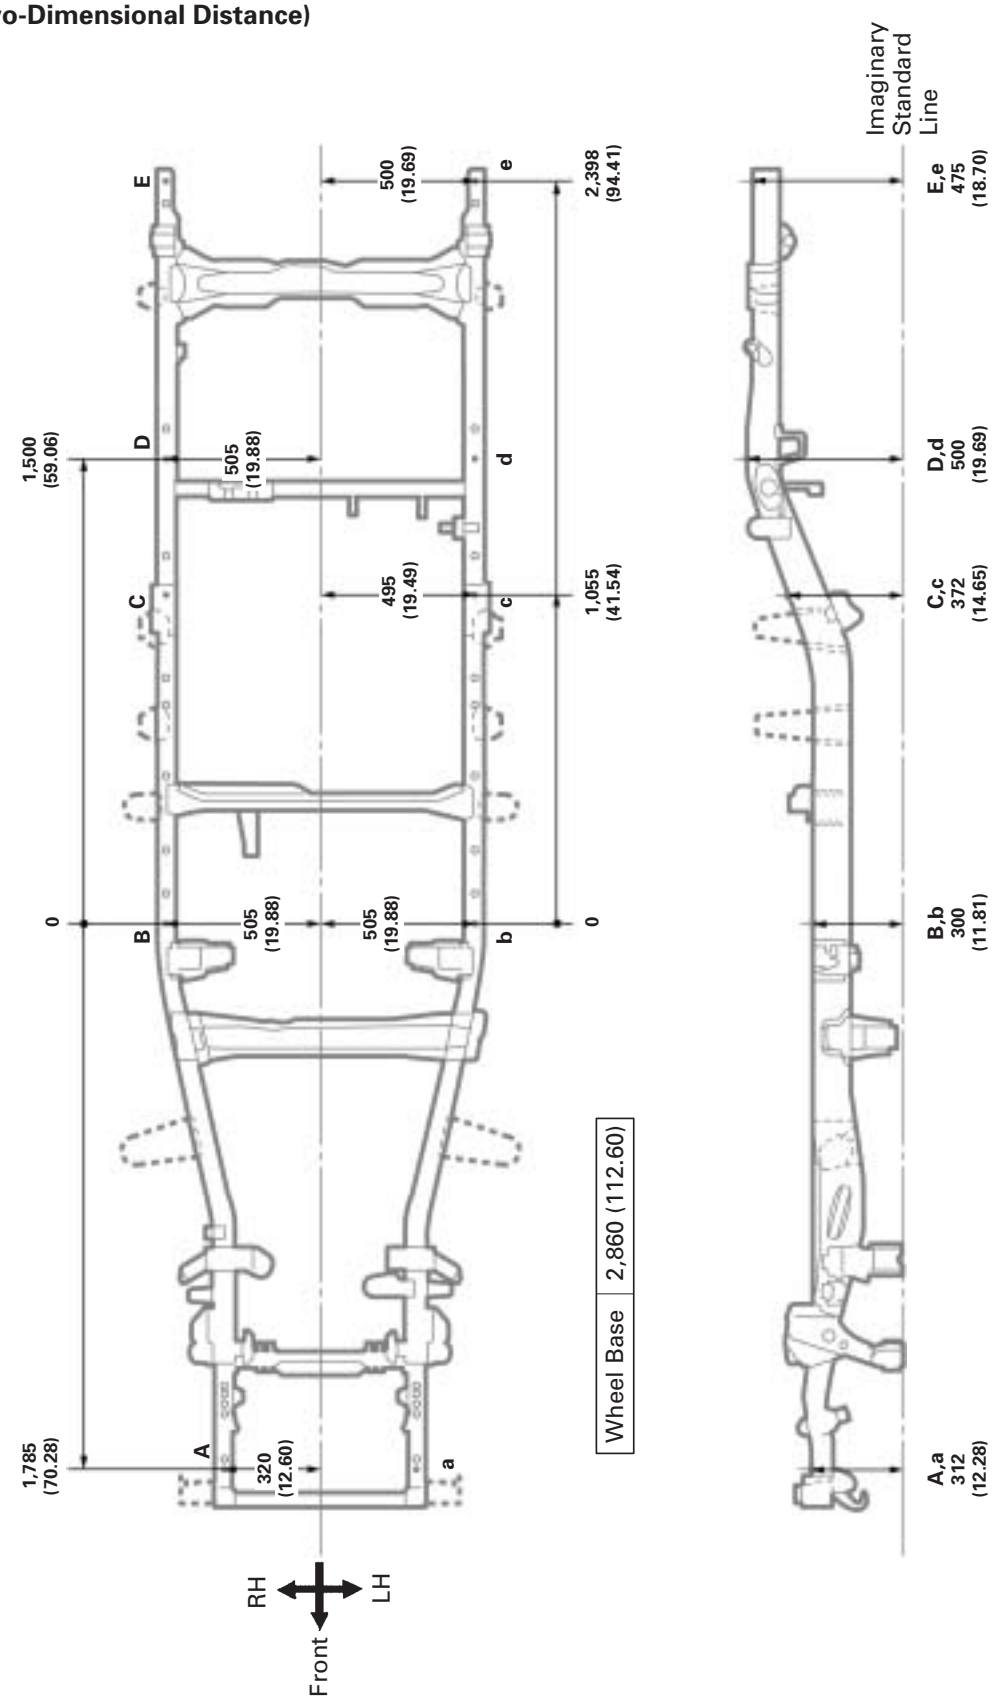


Symbol	Name	Hole dia.
A, a	Power steering tube installation nut	8 (0.31)nut
B, b	Wire harness installation hole	7 (0.28)
C, c	Wire harness installation hole	12 x 7 (0.47 x 0.28)

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9(0.35)
E, e	Rear body mounting hole	18 x 21(0.71 x 0.83)
—	—	—

FRAME DIMENSION – Lower Face
4WD (For Thailand) & 4WD STYLE 2WD

(Three-Dimensional Distance)

mm (in.)

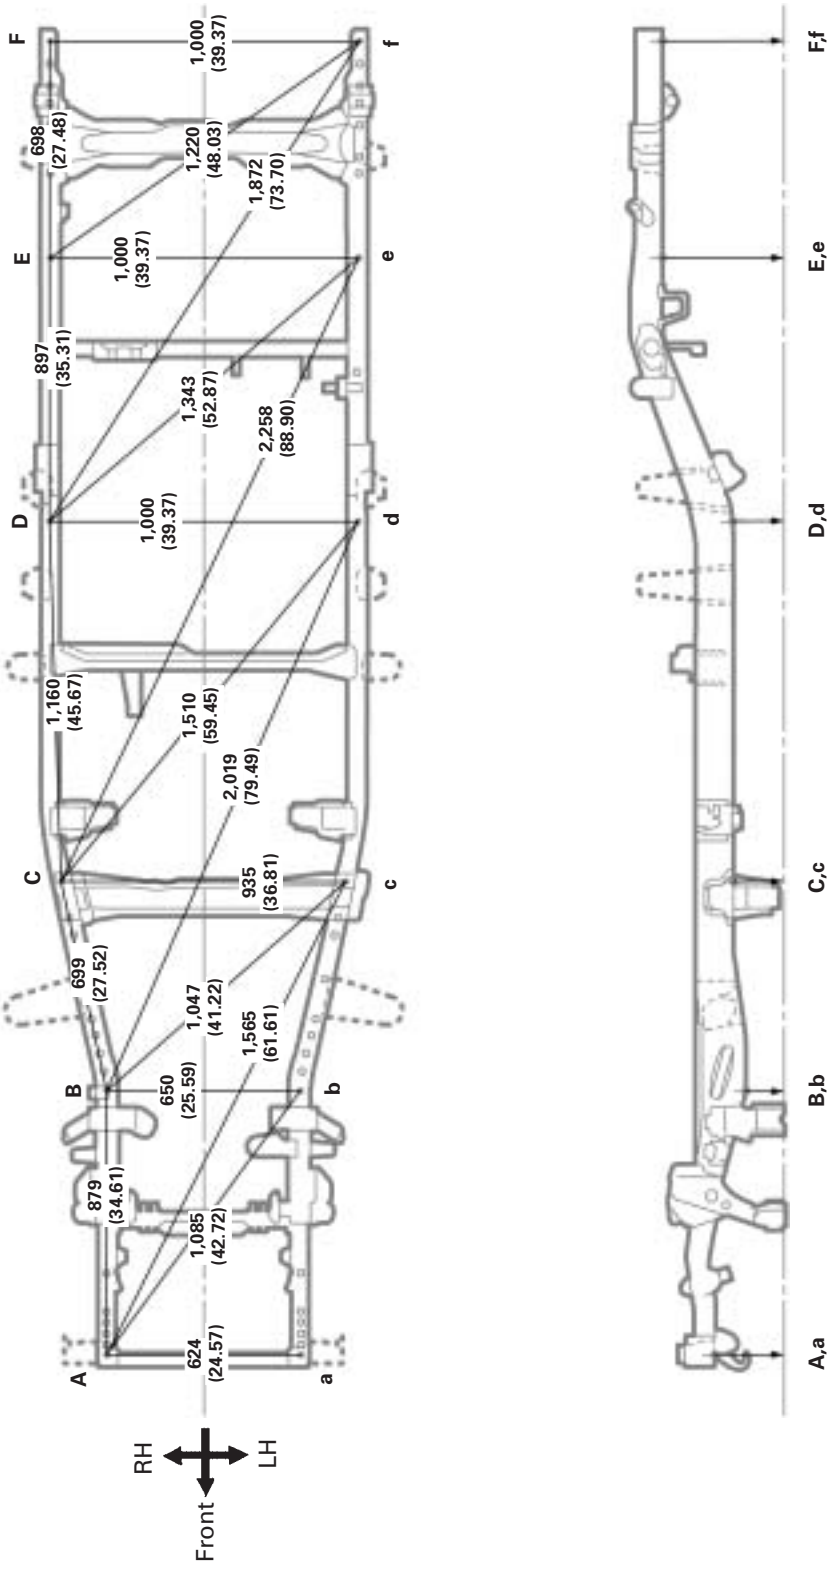


Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Stabilizer bracket installation nut	8 (0.31)nut
C, c	Frame crossmember installation nut	14 (0.55)nut

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	28 x 31 (1.10 x 1.22)

FRAME DIMENSION – Lower Face
4WD (For Thailand) & 4WD STYLE 2WD (Cont'd)

(Two-Dimensional Distance)

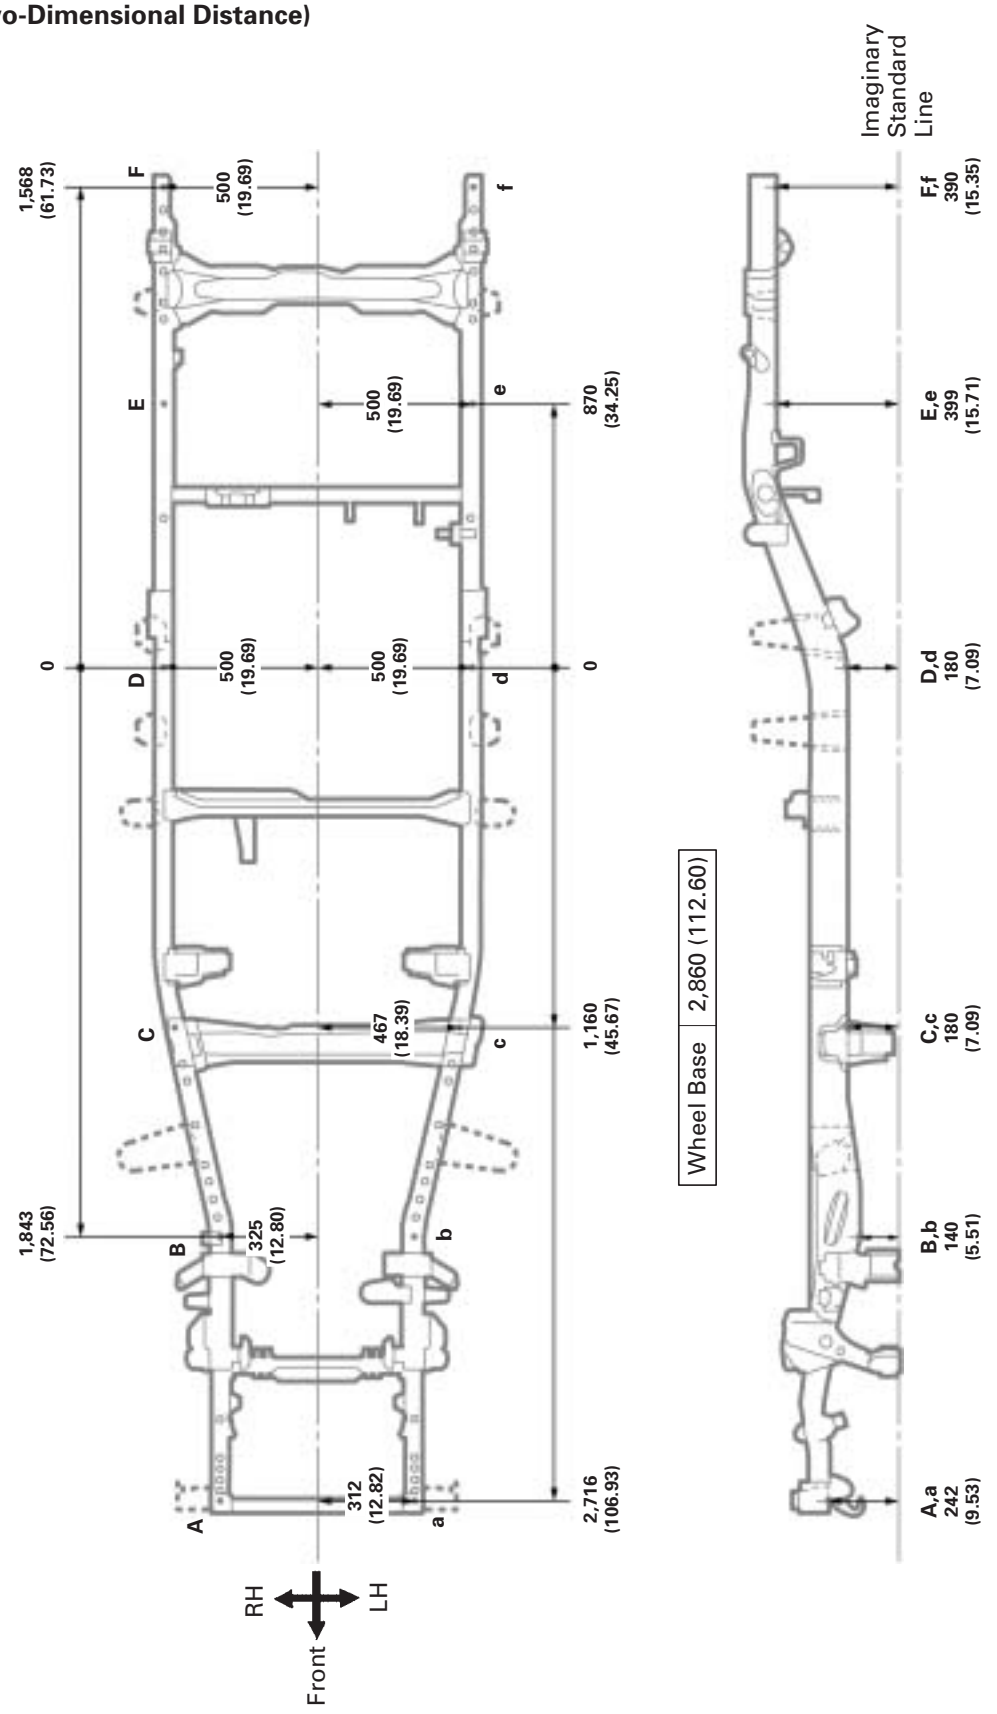

Symbol	Name	Hole dia.
A, a	Front hook installation hole	14 (0.55)
B, b	Stabilizer bracket installation nut	8 (0.31)nut
C, c	Frame crossmember installation nut	14 (0.55)nut

Symbol	Name	Hole dia.
D, d	Frame side rail working hole	9 (0.35)
E, e	Frame side rail working hole	9 (0.35)
F, f	Rear body mounting hole	28 x 31 (1.10 x 1.22)