


FRONT CROSSMEMBER (ASSY)

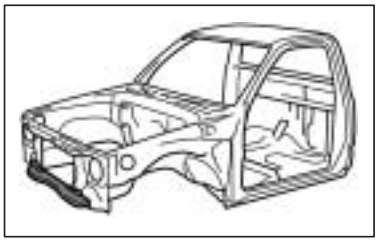



REMOVAL

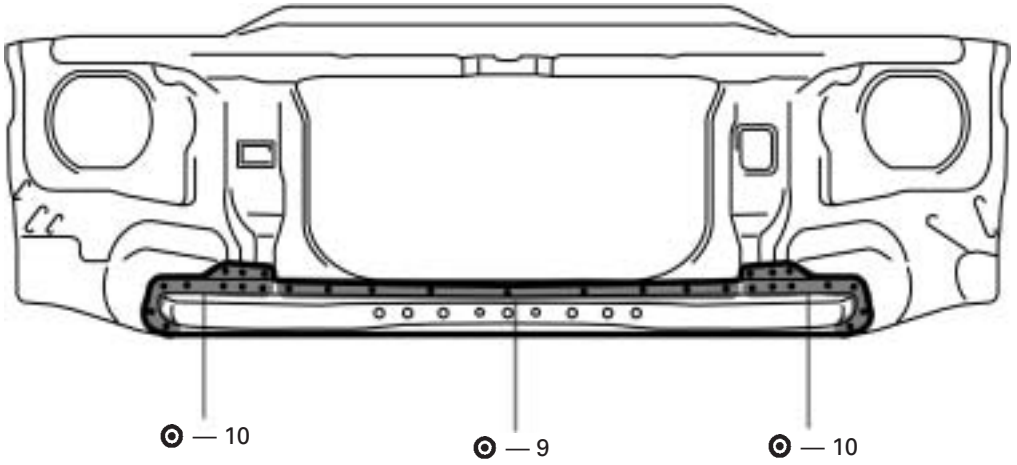

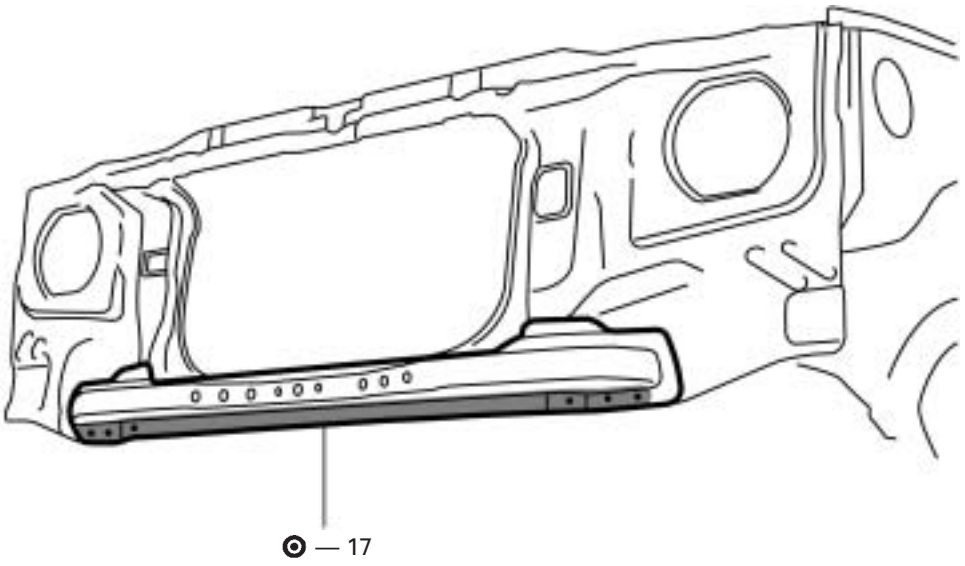

INSTALLATION

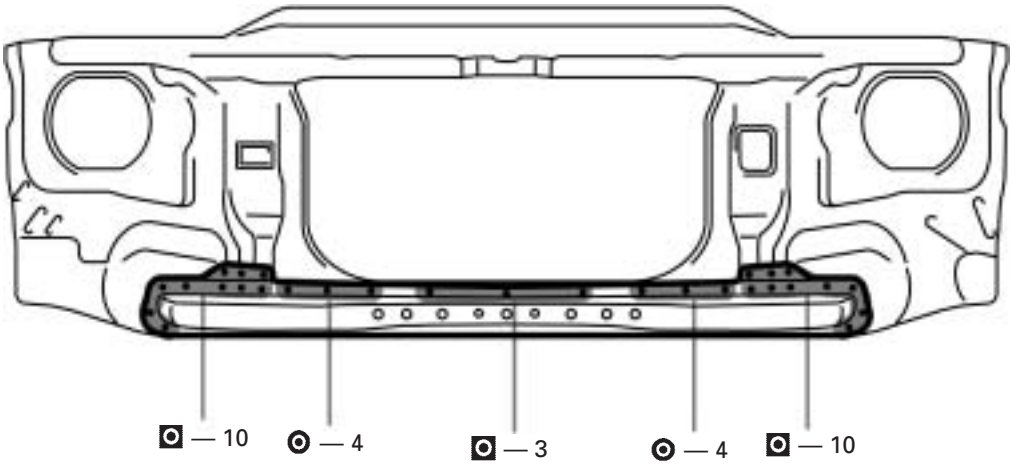

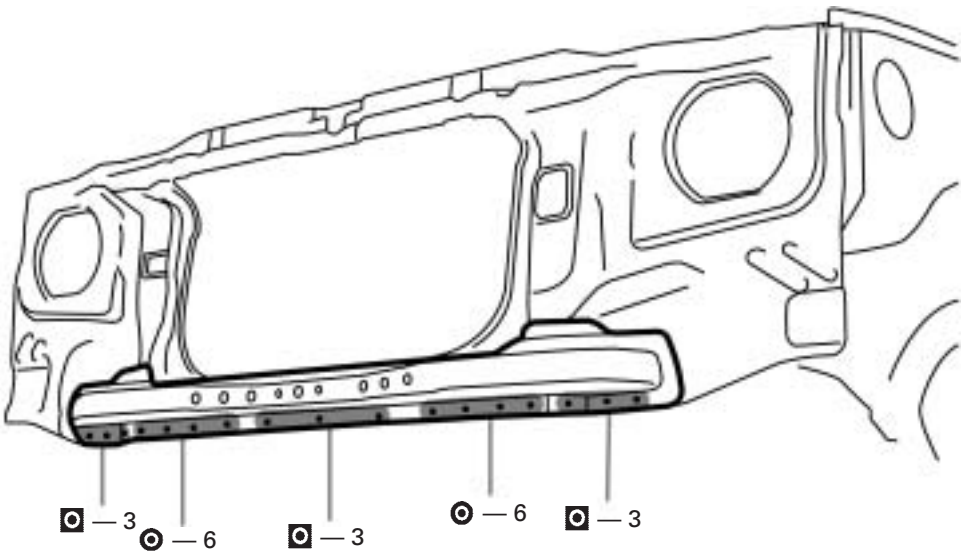

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.