



ROCKER OUTER PANEL (CUT): Double Cab

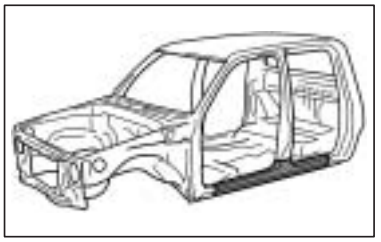

REMOVAL

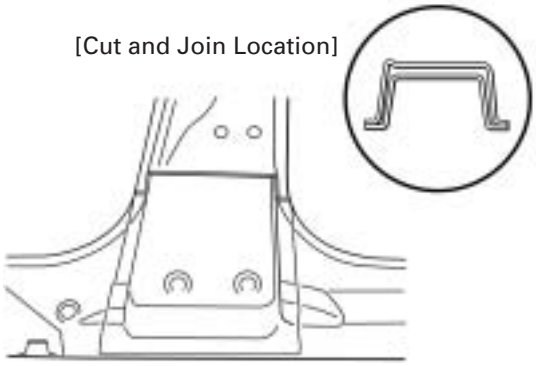

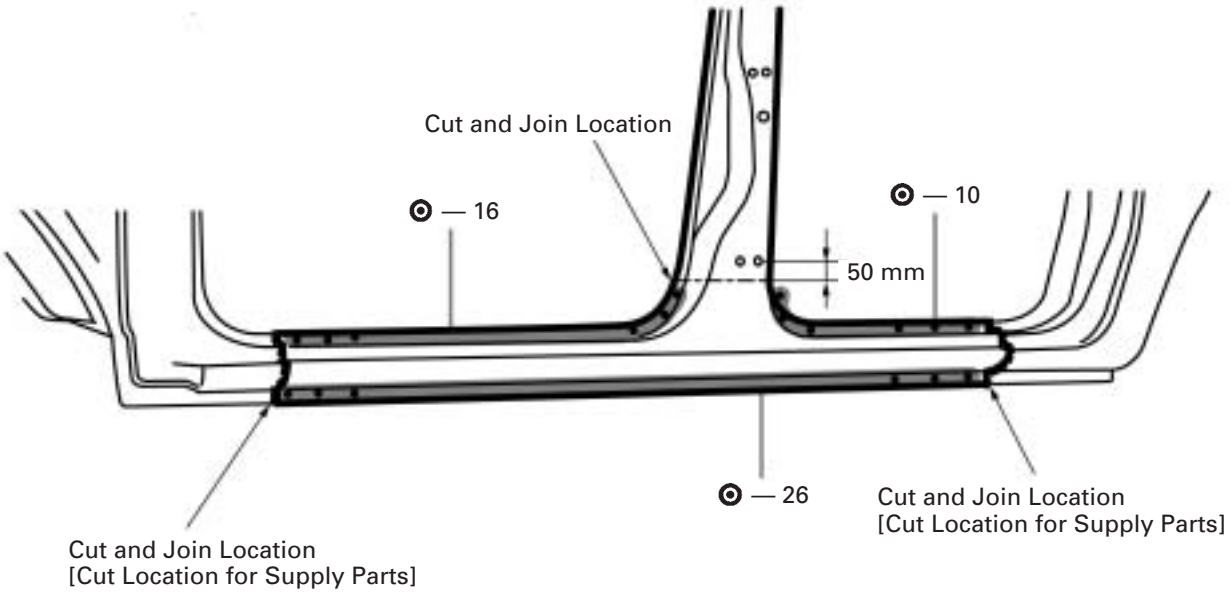


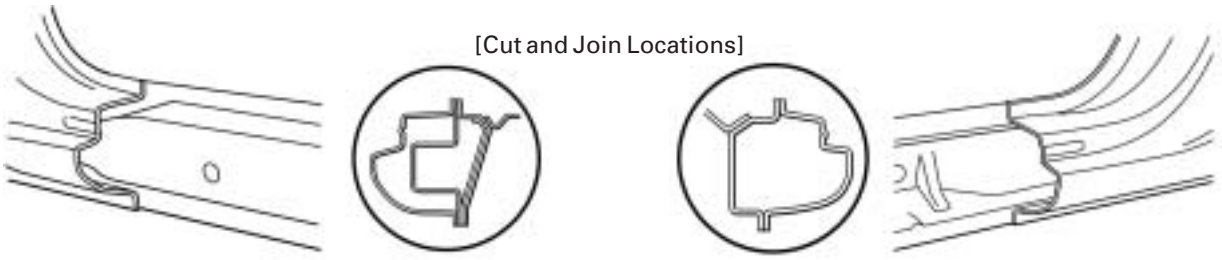

1. Cut and join the parts at the locations as shown above.

mm	in.
50	1.97

INSTALLATION

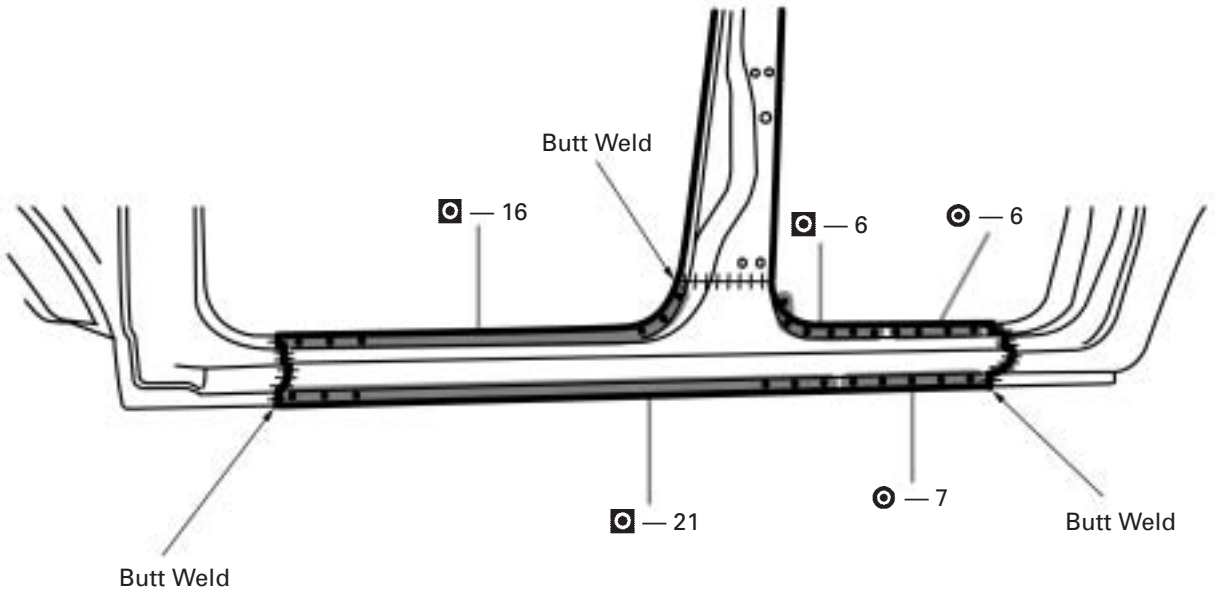

1. Temporarily install the new parts and check the fit of the front door and rear door.