


QUARTER PANEL (CUT): Regular Cab

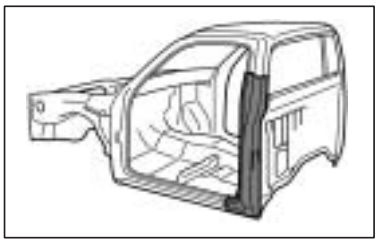


REMOVAL

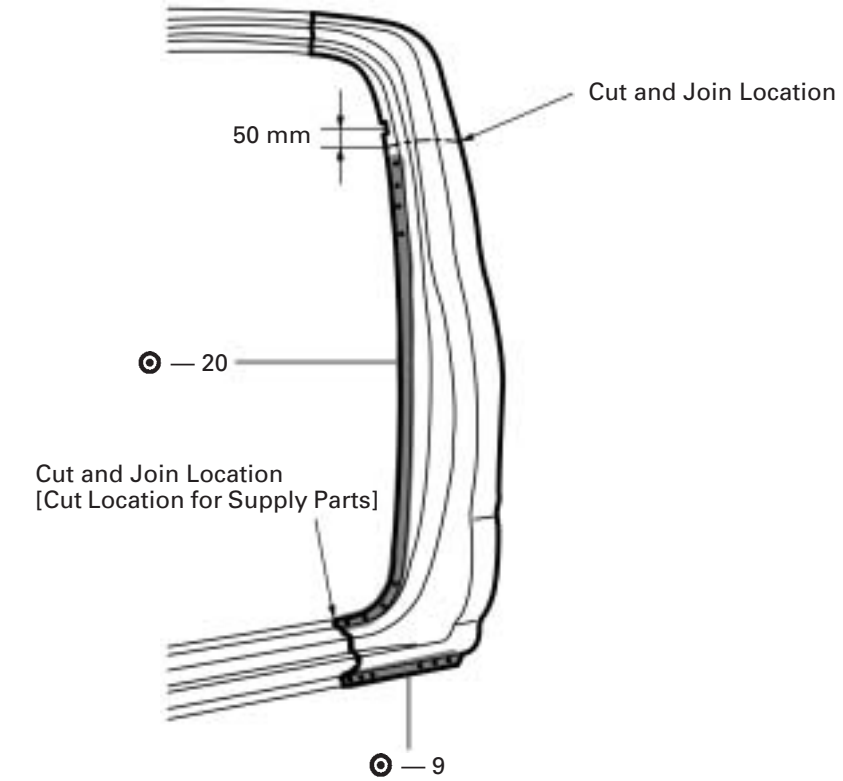


[Cut and Join Locations]

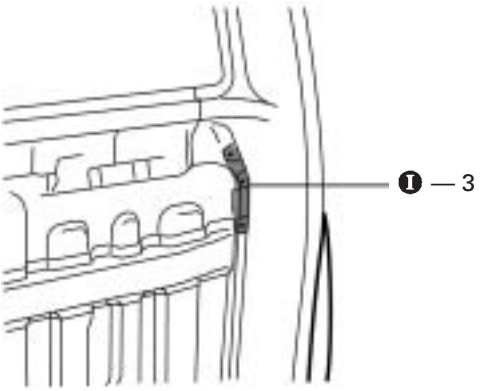


mm	in.
50	1.97

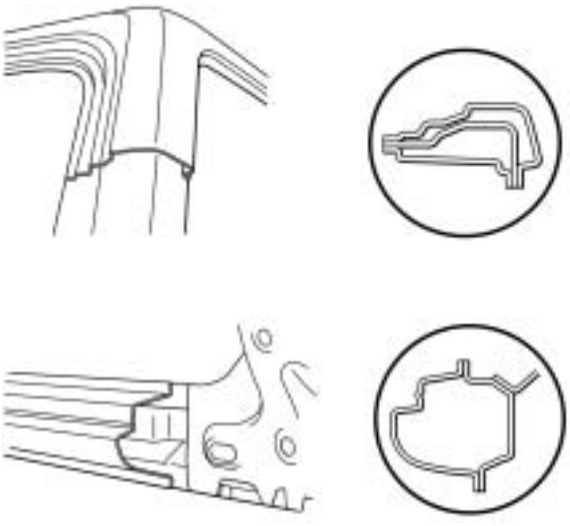

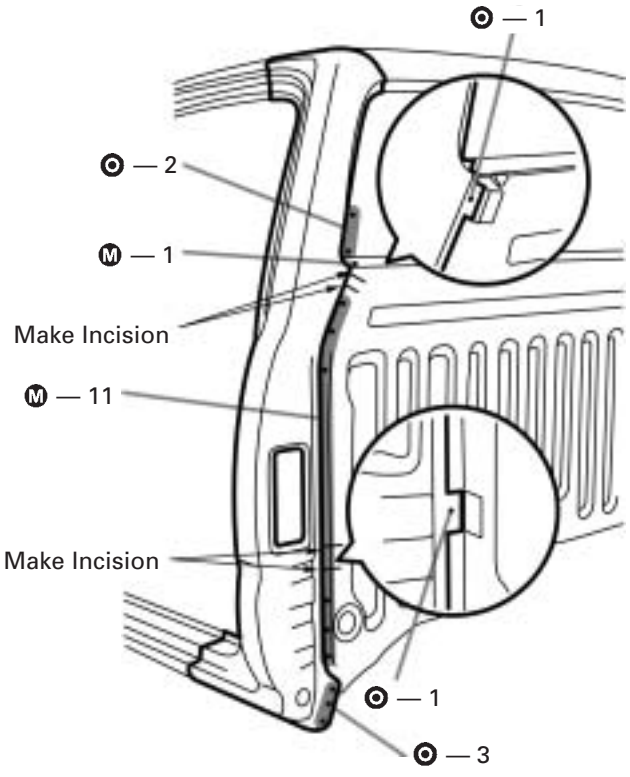

1. Cut and join the parts at the locations as shown above.
2. Make an incision in the back panel and bend it upward as shown. Drill out the spot welds and separate the roof side outer panel.

INSTALLATION

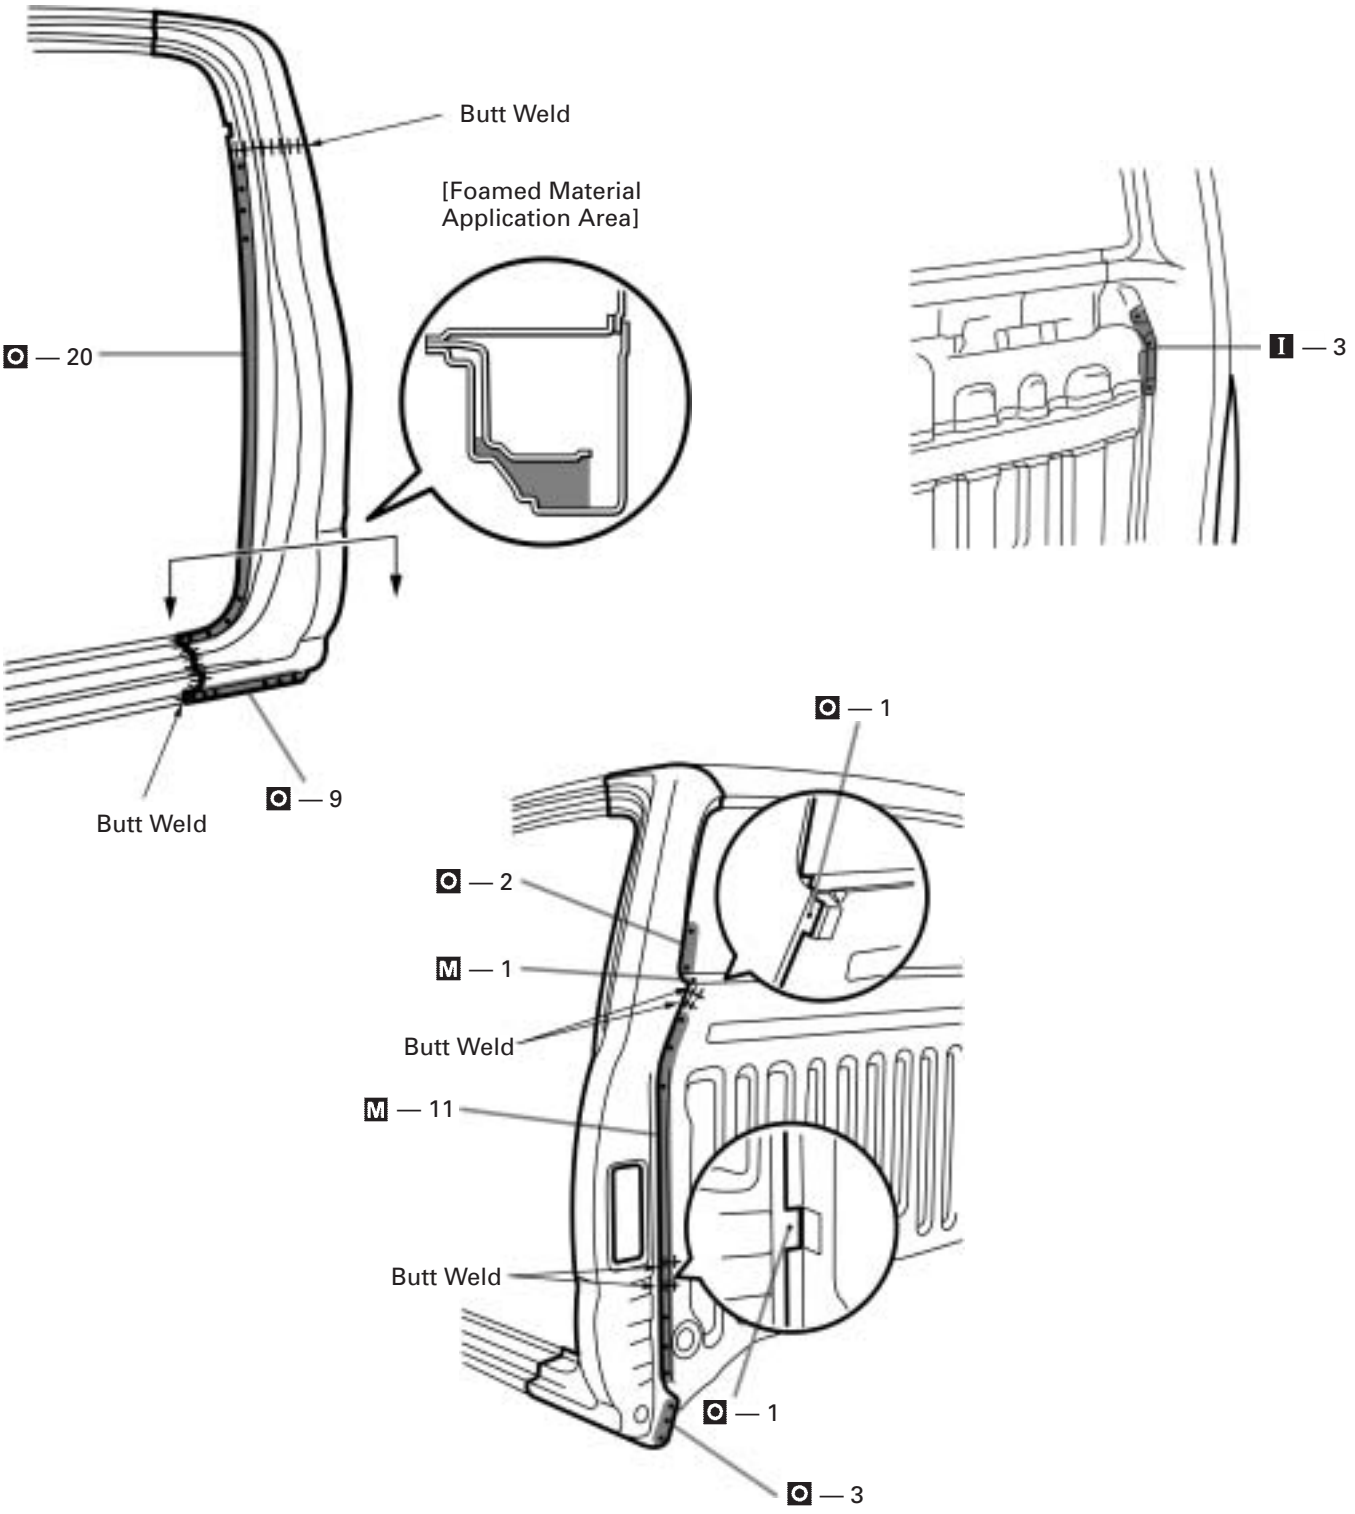

1. Temporarily install the new parts and check the fit of the front door and back window glass.
2. After installilng the new parts apply foamed material.