


QUARTER LOCK PILLAR REINFORCEMENT (CUT): Regular Cab

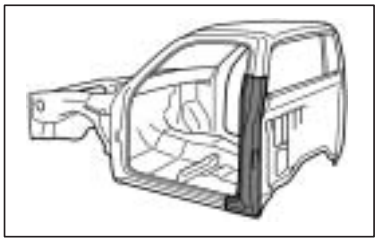

REMOVAL (With the quarter panel removed.)

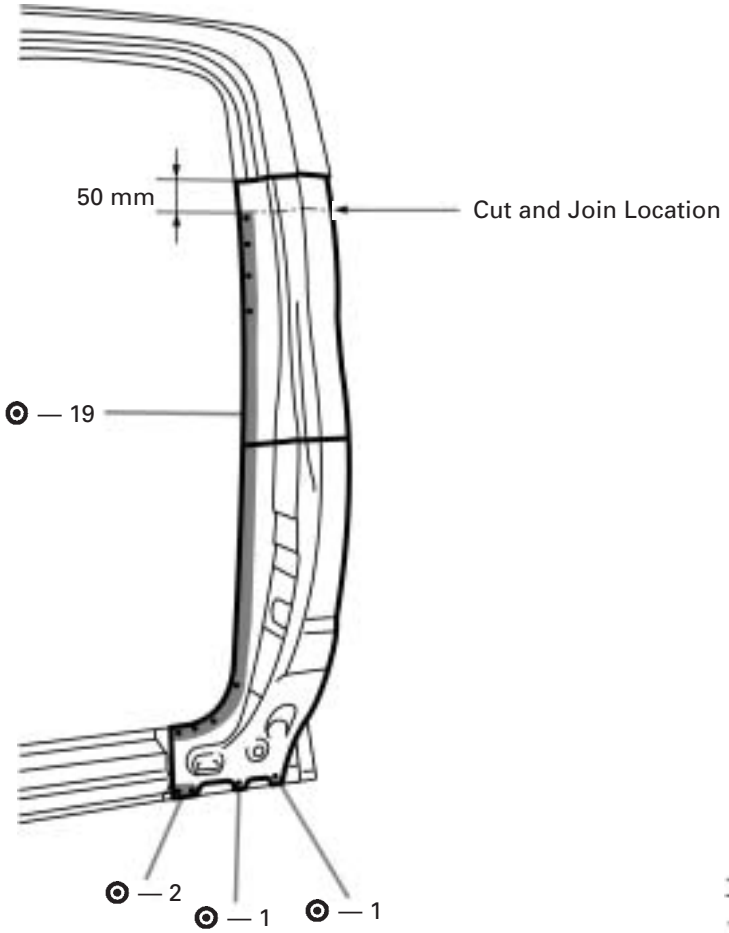


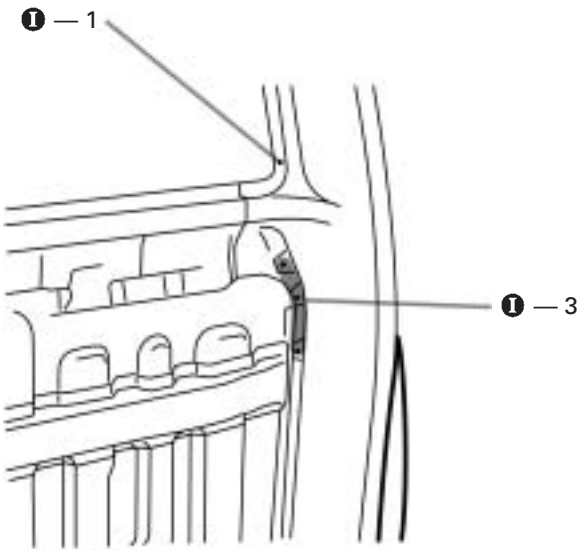

1. Cut and join the parts at the location as shown above.

mm	in.
50	1.97

INSTALLATION

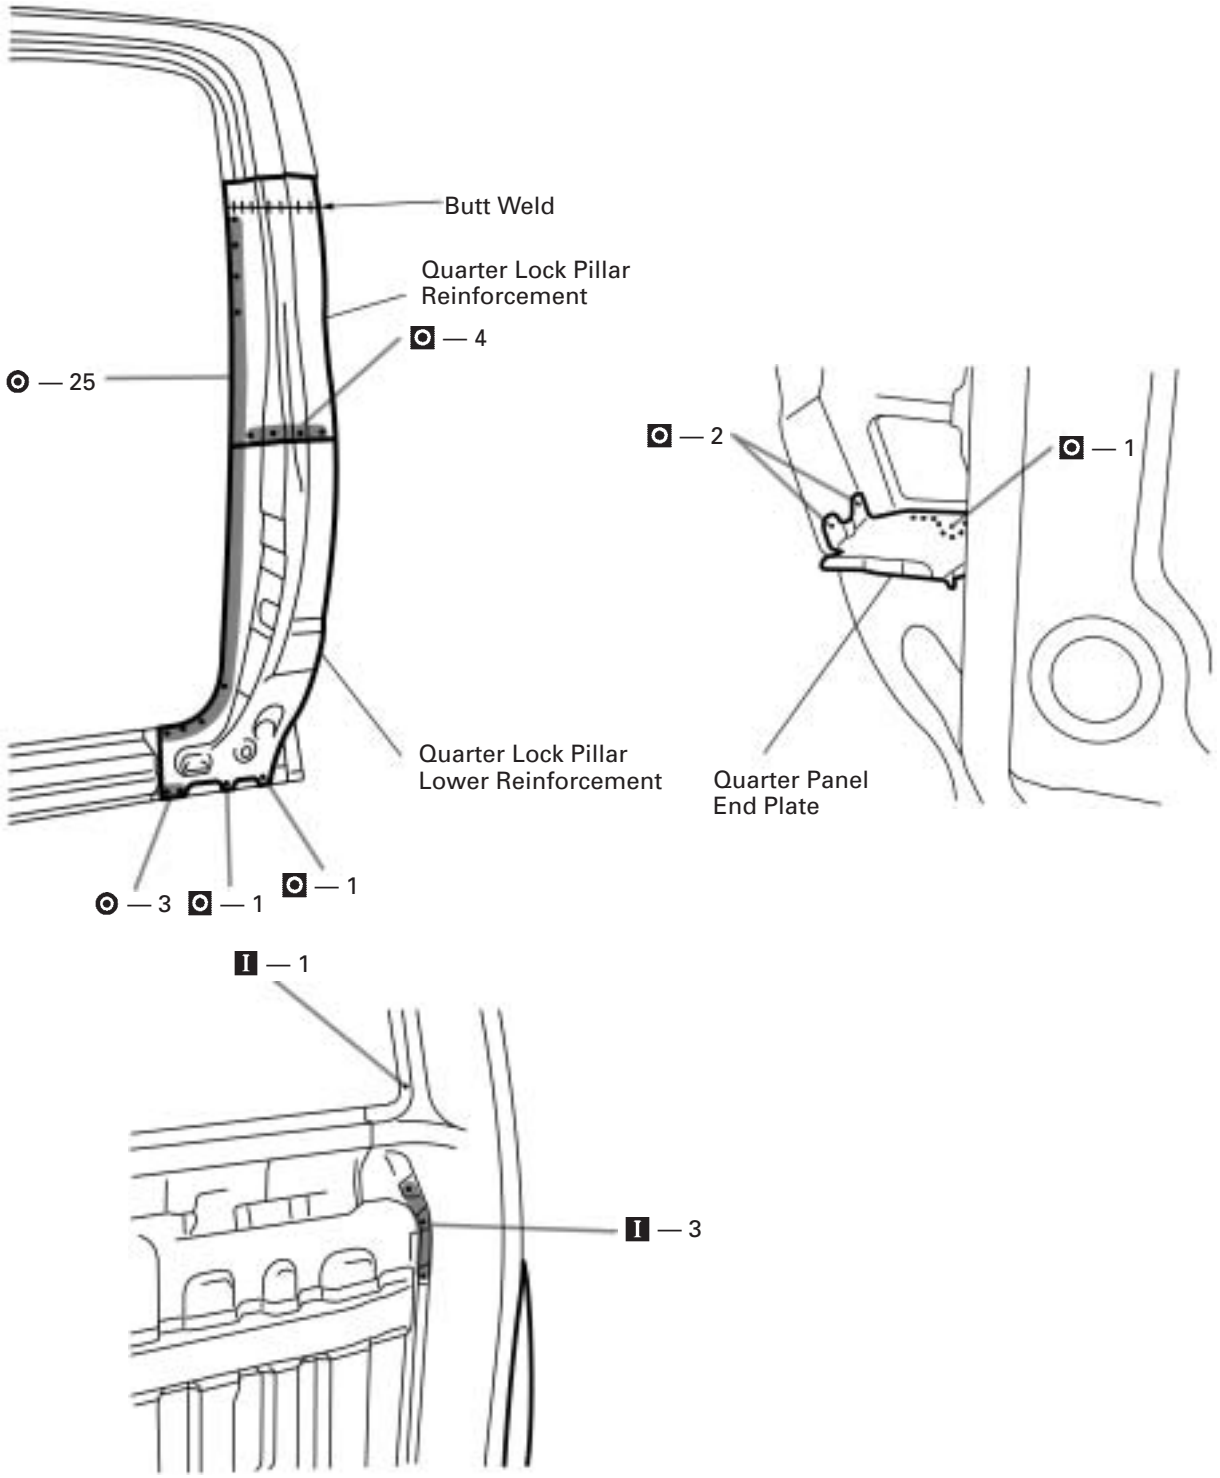

1. Before welding the new parts, temporarily install the quarter panel and check the fit.