


QUARTER LOCK PILLAR REINFORCEMENT (CUT): Double Cab

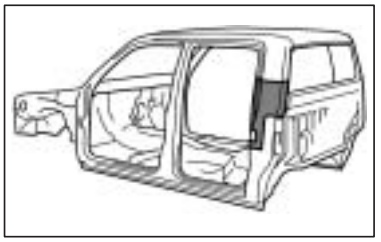

REMOVAL (With the quater panel removed.)

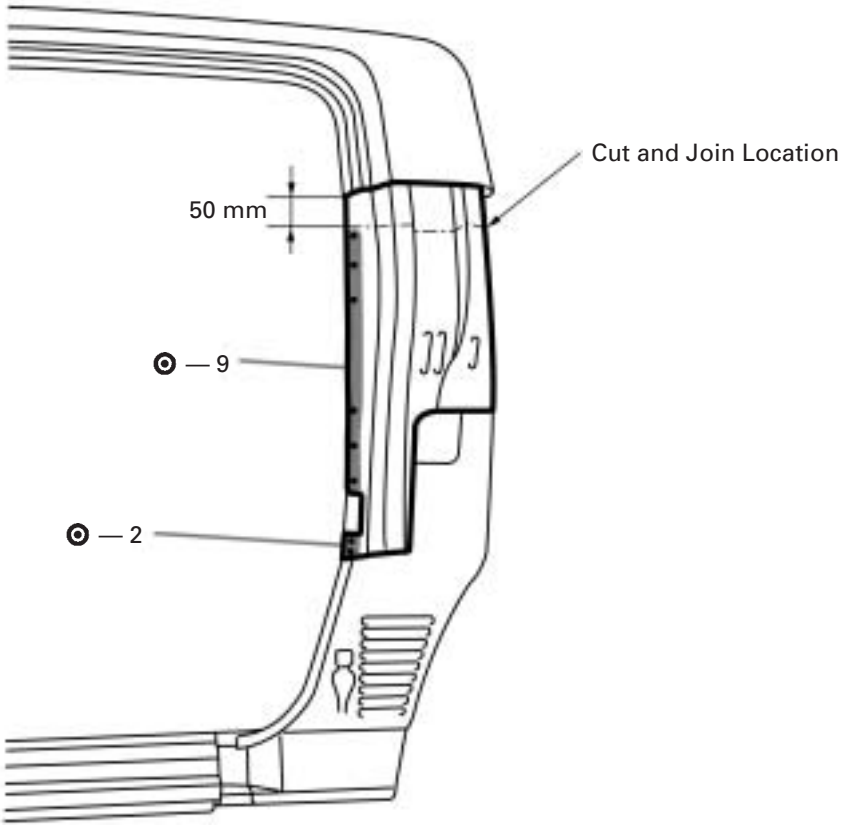


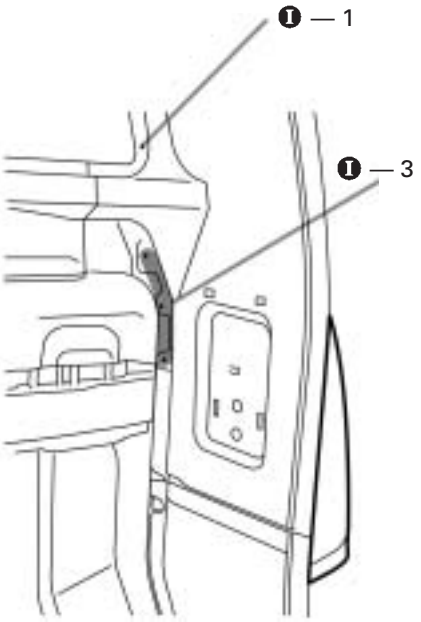


1. Cut and join the parts at the location as shown above.

mm	in.
50	1.97

INSTALLATION

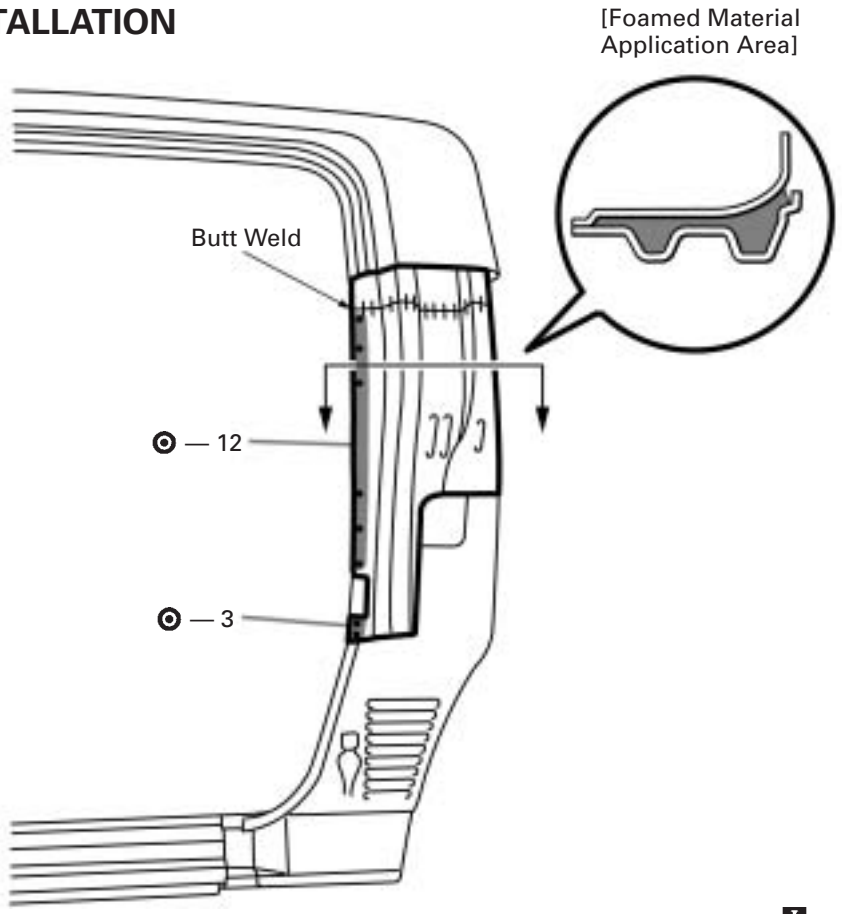

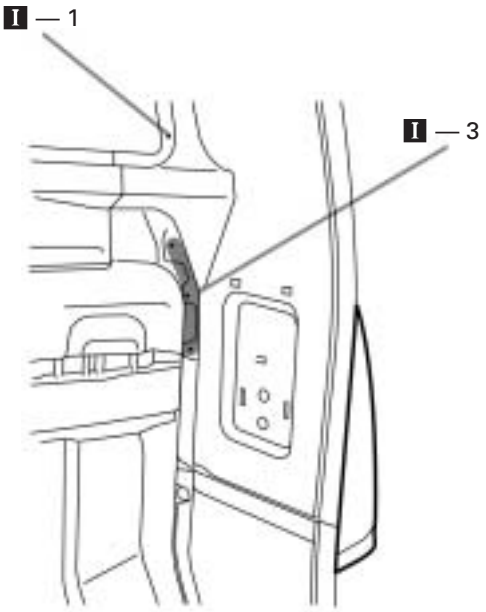

1. Before welding the new parts, temporarily install the quarter panel and check the fit.
2. After installing the new parts apply foamed material.