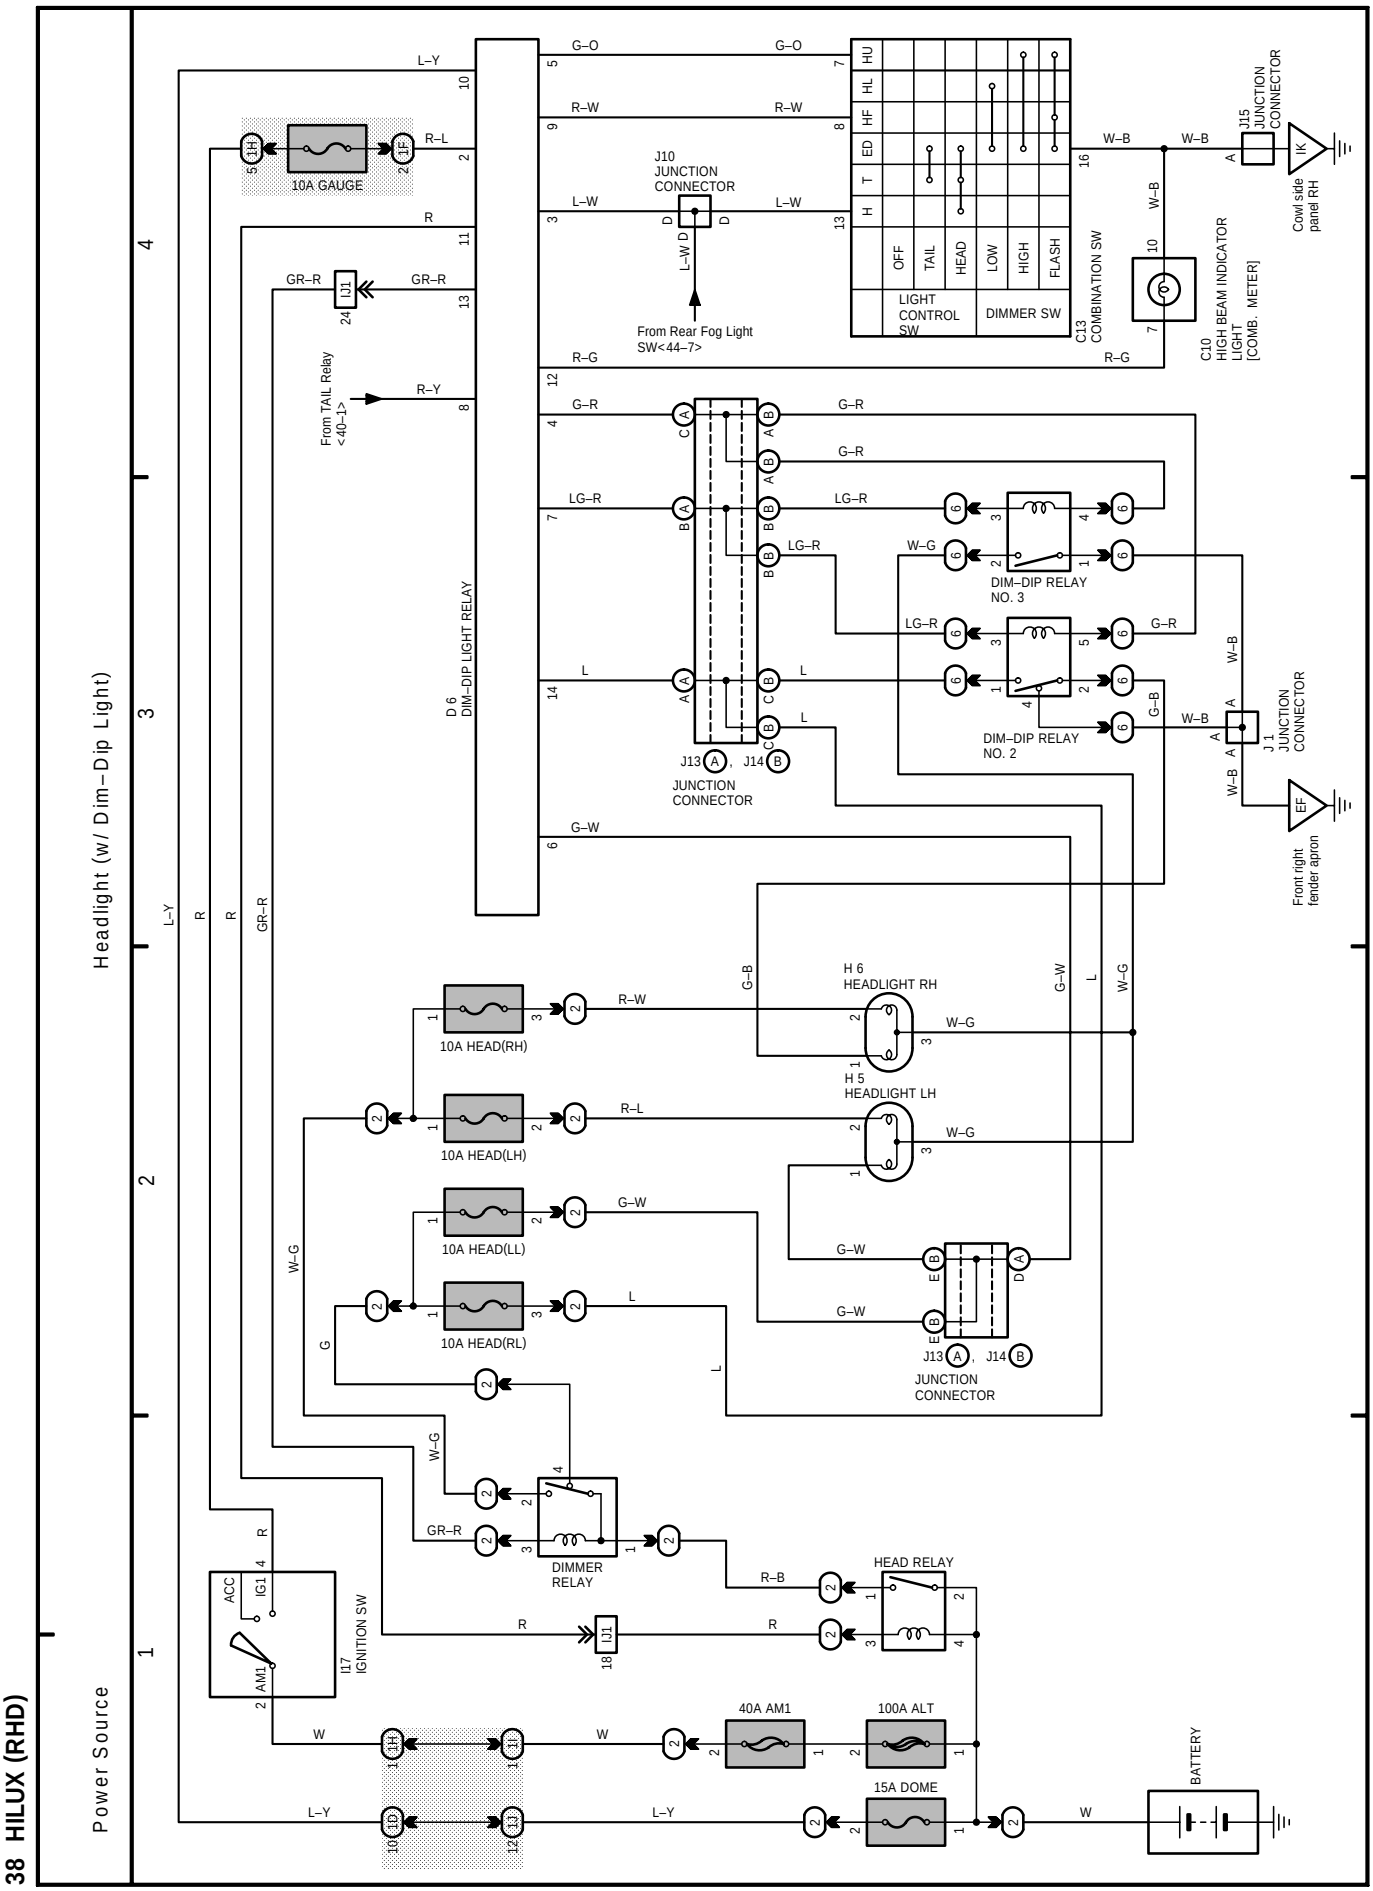

38 HILUX (RHD)
Power Source
Headlight (w/ Dim–Dip Light)
1
2
3
4
10A GAUGE
J10 JUNCTION CONNECTOR
From Rear Fog Light SW<44–7>
LIGHT CONTROL SW
DIMMER SW
C13 COMBINATION SW
C10 HIGH BEAM INDICATOR LIGHT [COMB. METER]
J15 JUNCTION CONNECTOR
Cowl side panel RH
From TAIL Relay <40–1>
D 6 DIM–DIP LIGHT RELAY
DIM–DIP RELAY NO. 3
DIM–DIP RELAY NO. 2
J13 , J14
JUNCTION CONNECTOR
J 1 JUNCTION CONNECTOR
Front right fender apron
10A HEAD(RH)
10A HEAD(LH)
10A HEAD(LL)
10A HEAD(RL)
H 6 HEADLIGHT RH
H 5 HEADLIGHT LH
DIMMER RELAY
HEAD RELAY
I17 IGNITION SW
ACC
IG1
AM1
40A AM1
100A ALT
15A DOME
BATTERY