

TRANSFER

■ DESCRIPTION

As in the previous model, the RF1A, VF1A and VF1AM transfers are used.
A counter gear type RF1A transfer has been adopted on the 3L engine model for General Countries. A planetary gear type VF1A transfer has been adopted on other models.
The VF1AM transfer, which is a type of VF1A transfer to which one-touch 2-4 select system has been added, is available as optional equipment on the 4WD double cab model for Australia.
The basic construction and operation are the same as those of the previous model.

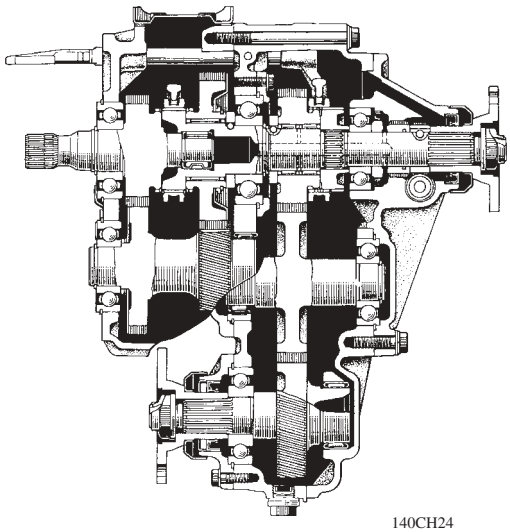

RF1A Transfer

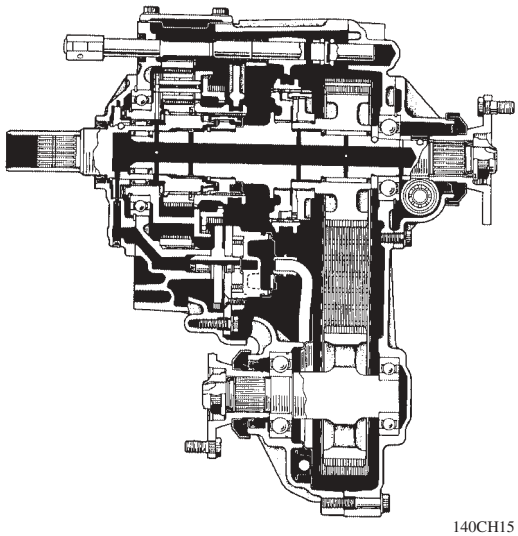

VF1A Transfer

▶ Specifications ◀

Transfer Type / Item		RF1A	VF1A (M)
Reduction Gear Type		Counter Gear	Planetary Gear
Gear Ratio	H2 and H4	1.000	←
	L4	2.276	2.566
Oil Capacity	liters (US qts, Imp. qts)	1.6 (1.7, 1.4)	1.1 (1.2, 1.0)
Oil Grade		API GL-4 or GL-5	←
Oil Viscosity		SAE 75W-90	←