
■ REAR AXLE

A semi-floating axle is used on all model as in the previous model.

BRAKES

■ DESCRIPTION

- A ventilated disc brakes are used for the front on all models.
- A leading trailing drum brakes are used for the rear on all models.
- As in the previous model, the LSPV or LSP & BV is used for the brake control valve on the models for Europe, Australia, G.C.C. Countries and China. On the models for General Countries except China, a new type of blend valve has been adopted.
- An ABS is optional equipment on the models for Europe, Australia and G.C.C. Countries.

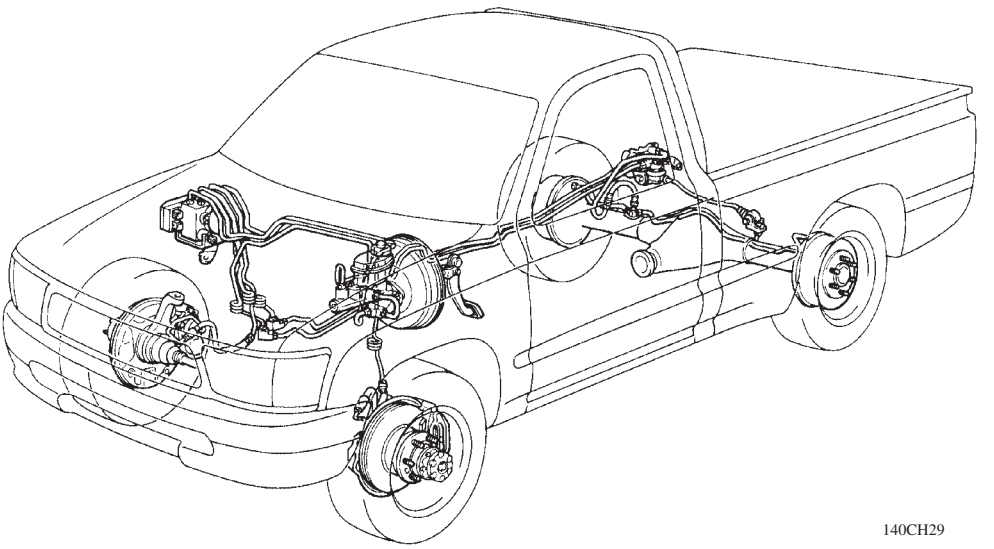

4WD LHD Model

2WD Model (Except Prerunner)

Destination / Engine Type / Item		Europe	Australia			G.C.C. Countries			General Countries			
		2L	1RZ-E	3RZ-FE	5L	1RZ	3RZ-F	3L	1RZ	2RZ-FE	3RZ-F	2L
Master Cylinder	Type	Tandem	←	←	←	←	←	←	←	←	←	←
	Diameter mm (in.)	25.4 (1.00)	23.81 (0.93), 25.4*1 (1.00)	25.4 (1.00)	←	23.81 (0.93), 25.4*1 (1.00)	25.4 (1.00)	←	23.81 (0.93), 25.4*3 (1.00)	25.4 (1.00)	←	←
Brake Booster	Type	Single	Single, Tandem*1	Tandem	Single	Single, Tandem*1	Tandem	Single	Single, Tandem*3	Tandem	←	Single
	Size in.	9"	9", 7.5"+7.5"*1	7.5"+7.5"	9"	9", 7.5"+7.5"*1	7.5"+7.5"	9"	9", 7.5"+7.5"*3	7.5"+7.5"	←	9"
Front Brake	Type	Ventilated Disc	←	←	←	←	←	←	←	←	←	←
	Wheel Cylinder Diameter mm (in.)	60.33 (2.38)	←	←	←	←	←	←	←	←	←	←
	Rotor Size (Outer Diameter x Thickness) mm (in.)	257 x 25 (10.12 x 0.98)	←	←	←	←	←	←	←	←	←	←
Rear Brake	Type	Leading-Trailing	←	←	←	←	←	←	←	←	←	←
	Wheel Cylinder Diameter mm (in.)	25.4 (1.00)	←	←	←	←	←	←	←	←	←	←
	Drum Inner Diameter mm (in.)	270 (10.63)	←	←	←	←	←	←	23.81 (0.94), 25.4 (1.00)*3	23.81 (0.94)	23.81 (0.94), 25.4 (1.00)*3	23.81 (0.93)
Brake Control Valve		LSP & BV	←	←	←	LSPV, LSP & BV*2	←	←	Blend Valve, LSPV*3	Blend Valve	Blend Valve, LSPV*3	Blend Valve
Parking Brake	Type	Drum	←	←	←	←	←	←	←	←	←	←
	Size mm (in.)	270 (10.63)	←	←	←	←	←	←	←	←	←	←
	Lever Type	Stick	←	←	←	←	←	←	←	←	←	←
ABS		OPT	←	←	←	←	←	←	–	–	–	–

*1: Models with ABS *2: Option *3: Models for China

4WD Model (Prerunner Included)

Destination / Engine Type / Item		Europe		Australia		G.C.C. Countries		General Countries		
		2RZ-FE	2L-T	3RZ-FE	5L	3RZ-F	3L	2RZ-FE	3RZ-F	3L
Master Cylinder	Type	Tandem	←	←	←	←	←	←	←	←
	Diameter mm (in.)	23.81 (0.93)	←	←	←	←	←	←	←	←
Brake Booster	Type	Tandem	←	←	Single	Tandem	Single	Tandem	←	Single
	Size in.	7.5" + 7.5"	←	←	9"	7.5" + 7.5"	9"	7.5" + 7.5"	←	9"
Front Brake	Type	Ventilated Disc	←	←	←	←	←	←	←	←
	Wheel Cylinder Diameter mm (in.)	42.85 (1.69) x 2	←	←	←	←	←	←	←	←
	Rotor Size (Outer Diameter x Thickness) mm (in.)	289 x 20 (11.38 x 0.79)	←	←	←	←	←	←	←	←
Rear Brake	Type	Leading-Trailing	←	←	←	←	←	←	←	←
	Wheel Cylinder Diameter mm (in.)	22.22 (0.87)	←	←	←	←	←	←	←	←
	Drum Inner Diameter mm (in.)	295 (11.61)	←	←	←	←	←	←	←	←
Brake Control Valve		LSP & BV	←	←	←	LSPV, LSP & BV*1	←	Blend Valve	Blend Valve, LSPV*2	Blend Valve
Parking Brake	Type	Drum	←	←	←	←	←	←	←	←
	Size mm (in.)	295 (11.61)	←	←	←	←	←	←	←	←
	Lever Type	Stick	←	←	←	←	←	←	←	←
ABS		OPT	←	←	←	←	←	–	–	–

*1: Option *2: Models for China