
■ENGINE SPECIFICATIONS AND PERFORMANCE CURVE

Item \ Engine			5L	3L
No. of Cyls. & Arrangement			4-Cylinder, In-Line	←
Valve Mechanism			8-Valve, OHC, Belt Drive	←
Combustion Chamber			Swirl Type	←
Manifolds			Cross-Flow	←
Fuel System			Distributor Type	←
Displacement cm³ (cu. in.)			2986 (182.2)	2779 (169.6)
Bore x Stroke mm (in.)			99.5 x 96.0 (3.92 x 3.78)	96.0 x 96.0 (3.78 x 3.78)
Compression Ratio			22.2 : 1	←
Max. Output		SAE-NET	67 kW@4000 rpm	65 kW@4000 rpm
Max. Torque		SAE-NET	196 N·m@2400 rpm	185 N·m@2400 rpm
Valve Timing	Intake	Open	6° BTDC	←
		Close	42° ABDC	←
	Exhaust	Open	53° BBDC	←
		Close	3° ATDC	←
Fuel Cetane Number			50	←
Oil Grade			API CD or Better	←

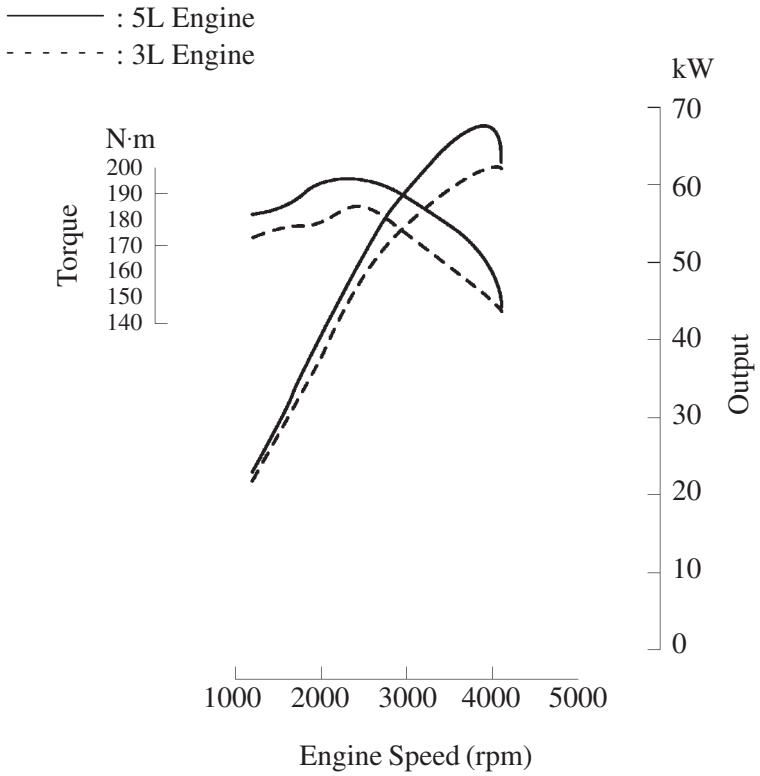

140EG01

EG