

■LUBRICATION SYSTEM

- The lubrication is fully pressurized and all oil passes through an oil cooler and an oil filter.
- A trochoid oil pump driven by a gear engaged with the crankshaft is used.

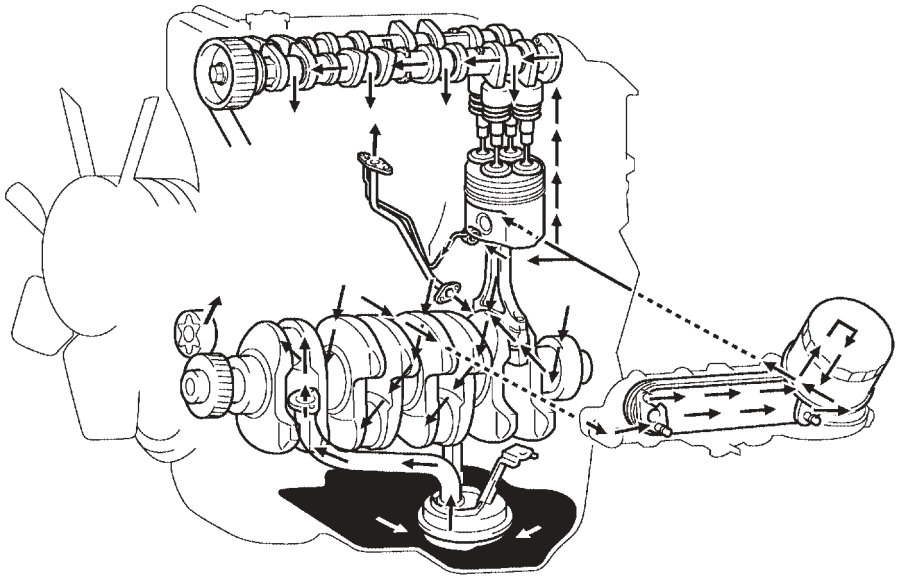

210EG33

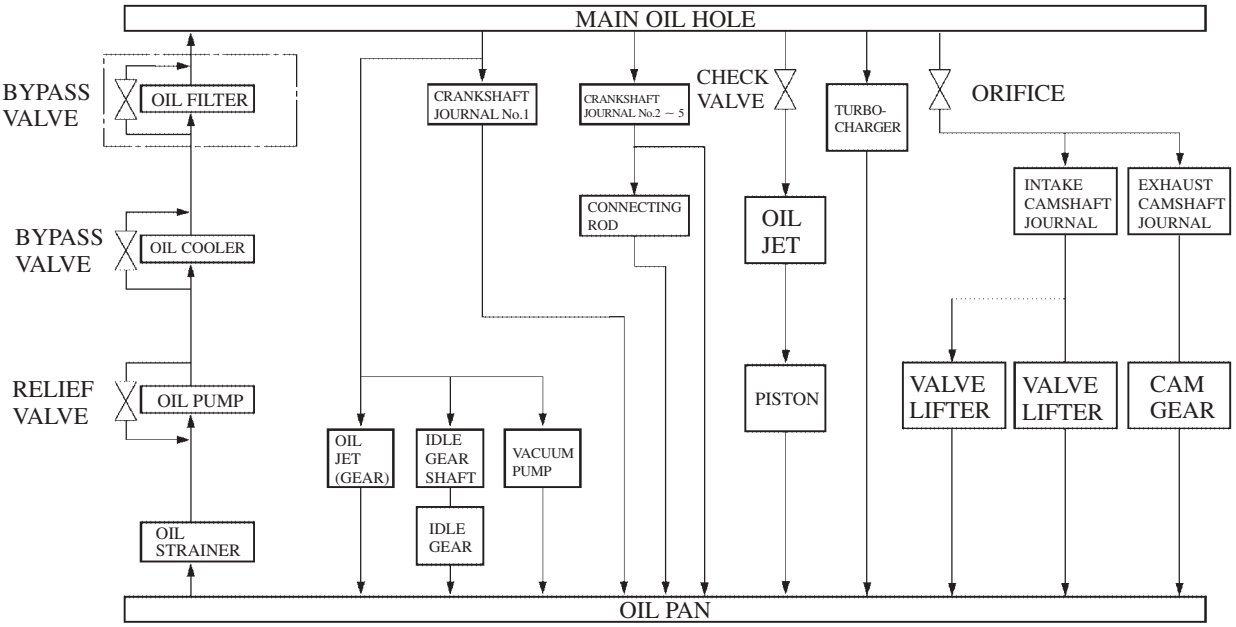

210EG70

▶ Oil Capacity ◀

Model	2WD	4WD
Dry	7.3 liter (7.7 US qts, 6.4 Imp. qts)	7.1 liter (7.5 US qts, 6.2 Imp. qts)
With oil filter	6.8 liter (7.2 US qts, 6.0 Imp. qts)	6.6 liter (7.0 US qts, 5.8 Imp. qts)
Without oil filter	6.1 liter (6.4 US qts, 5.4 Imp. qts)	5.9 liter (6.2 US qts, 5.2 Imp. qts)