

CLUTCH

■DESCRIPTION

- In accordance with the adoption of 2KD-FTV engine, the specification of a clutch is optimized.
- On the models with 2KD-FTV engine, noise and vibration has been reduced at the time of clutch pedal operation by installing the clutch accumulator on the clutch release cylinder.

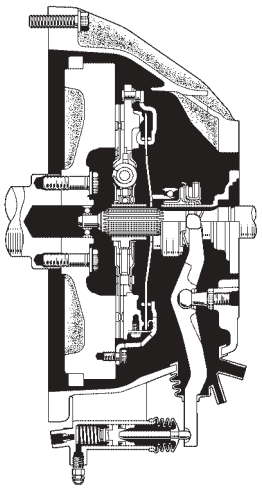

210CH05

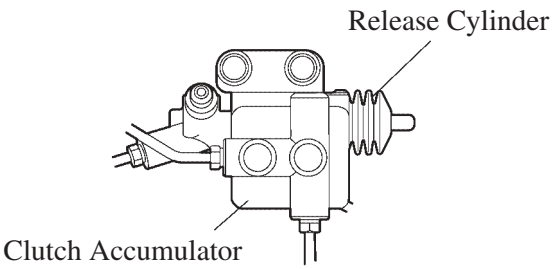

210CH06

▶ Specifications ◀

Item			2WD	4WD
Clutch	Type		Dry Type Single-Plate Clutch Diaphragm Spring	←
	Operation		Hydraulic	←
Clutch Cover	Type		DST*1	←
	Size	mm (in.)	236 (9.29)	260 (10.24)
Clutch Disc	Facing Size*2	mm (in.)	236 x 150 x 3.5 (9.29 x 5.91 x 0.14)	260 x 170 x 3.5 (10.24 x 6.69 x 0.14)
	Facing Area	cm^2 ($in.^2$)	260 (40.2)	303 (46.8)
Master Cylinder	Type		Conventional	←
	Cylinder Diameter	mm (in.)	15.87 (0.62)	←
Release Cylinder	Type		Non-Adjustable	←
	Cylinder Diameter	mm (in.)	20.64 (0.81)	19.05 (0.75)
Clutch Accumulator	Size	mm (in.)	42.0 (1.65)	←

*1: DST (Diaphragm Spring Turnover)
*2: Outer Diameter x Inner Diameter x Thickness