
ED04J–01

INSTALLATION

INSTALL THROTTLE BODY ASSEMBLY

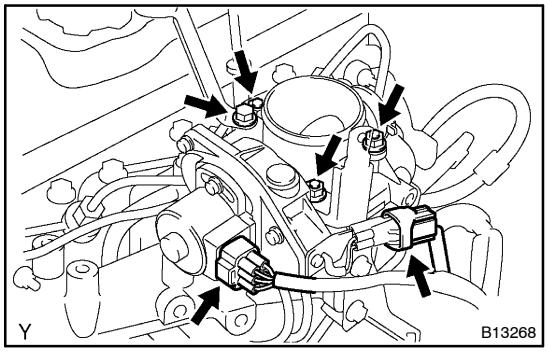

(a) Install the gasket, throttle body assembly and wire harness clamp with the 3 nuts.
Torque: 12 N·m (120 kgf·cm, 18 ft·lbf)
(b) Connect the 2 connectors.
(c) Install the intake air connector bracket with the bolt.
(d) Connect the check connector.