





SILENCER SHEET INSTALLATION AREAS

1+1 SEATER MODELS

Thickness of Asphalt Sheet

-  ... 0.8 mm (0.031 in.)
-  ... 2.0 mm (0.079 in.)
-  ... 3.0 mm (0.118 in.)
-  ... 3.2 mm (0.126 in.)
-  ... 3.5 mm (0.138 in.)
-  ... 4.0 mm (0.157 in.)
-  ... *1
-  ... *2

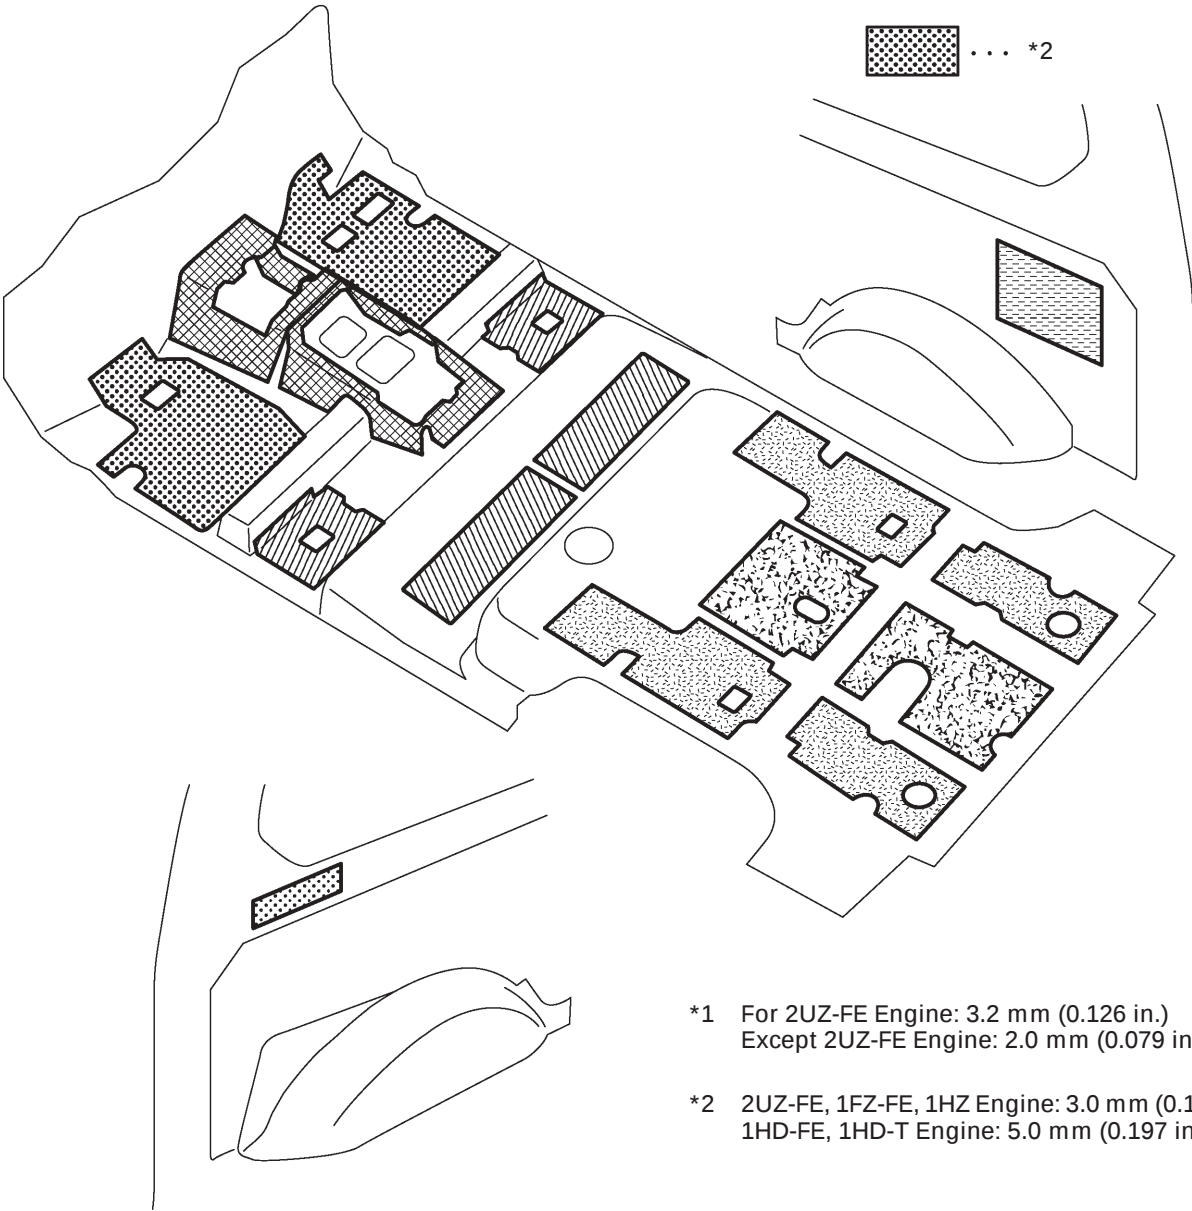


*1 For 2UZ-FE Engine: 3.2 mm (0.126 in.)
Except 2UZ-FE Engine: 2.0 mm (0.079 in.)

*2 2UZ-FE, 1FZ-FE, 1HZ Engine: 3.0 mm (0.118 in.)
1HD-FE, 1HD-T Engine: 5.0 mm (0.197 in.)

1+2 SEATER MODELS

Thickness of Asphalt Sheet

	... 0.8 mm (0.031 in.)
	... 2.0 mm (0.079 in.)
	... 3.0 mm (0.118 in.)
	... 3.2 mm (0.126 in.)
	... 3.5 mm (0.138 in.)
	... 4.0 mm (0.157 in.)
	... *1
	... *2

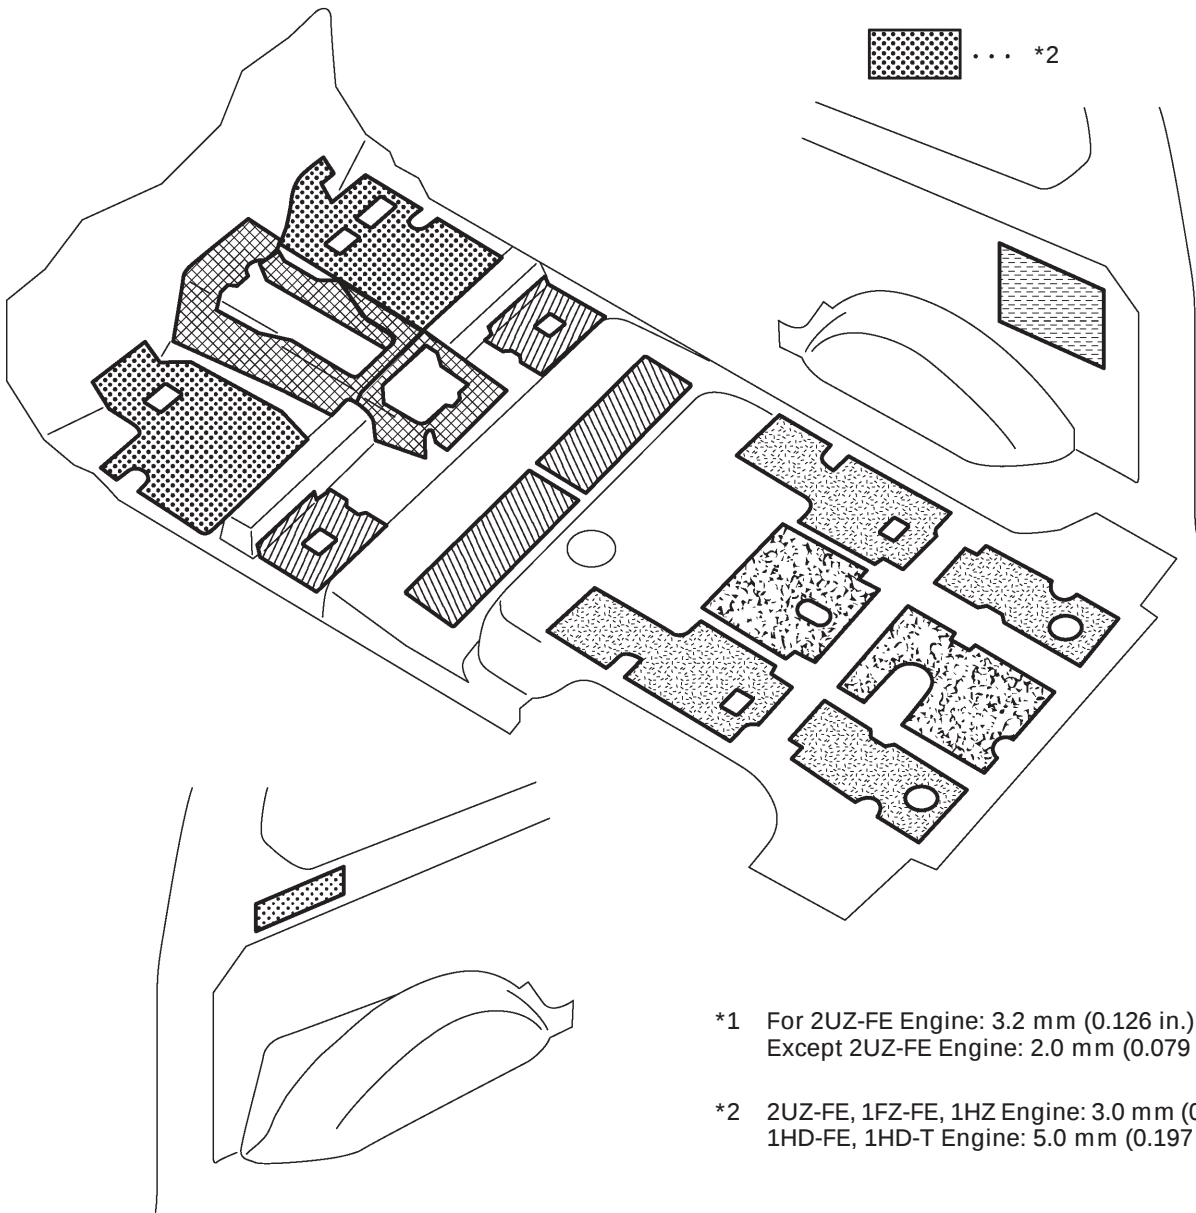

*1 For 2UZ-FE Engine: 3.2 mm (0.126 in.)
Except 2UZ-FE Engine: 2.0 mm (0.079 in.)

*2 2UZ-FE, 1FZ-FE, 1HZ Engine: 3.0 mm (0.118 in.)
1HD-FE, 1HD-T Engine: 5.0 mm (0.197 in.)