

BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS


HINT:

1. Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.
2. Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.
3. Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover, if accidentally applied to other areas.

LIFT-UP TYPE BACK DOOR



Back Door Hinge

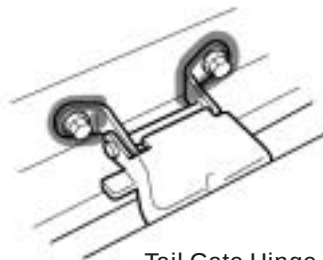


Tail Gate Hinge



Tail Gate Hinge

Back Door, Tail Gate

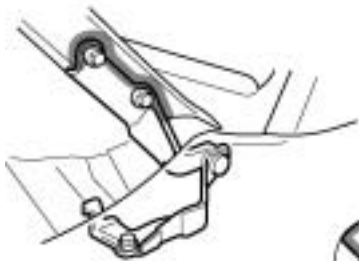

Hood Hinge



Door



Hood



Door Hinge



Door Hinge