


SILENCER SHEET INSTALLATION AREAS

1 + 1 SEATER MODELS

Thickness of Asphalt Sheet

	0.8 mm (0.031 in.)
	1.5 mm (0.059 in.)
	2.0 mm (0.079 in.)
	3.0 mm (0.118 in.)
	3.5 mm (0.138 in.)
	3.7 mm (0.146 in.)
	*1
	*2

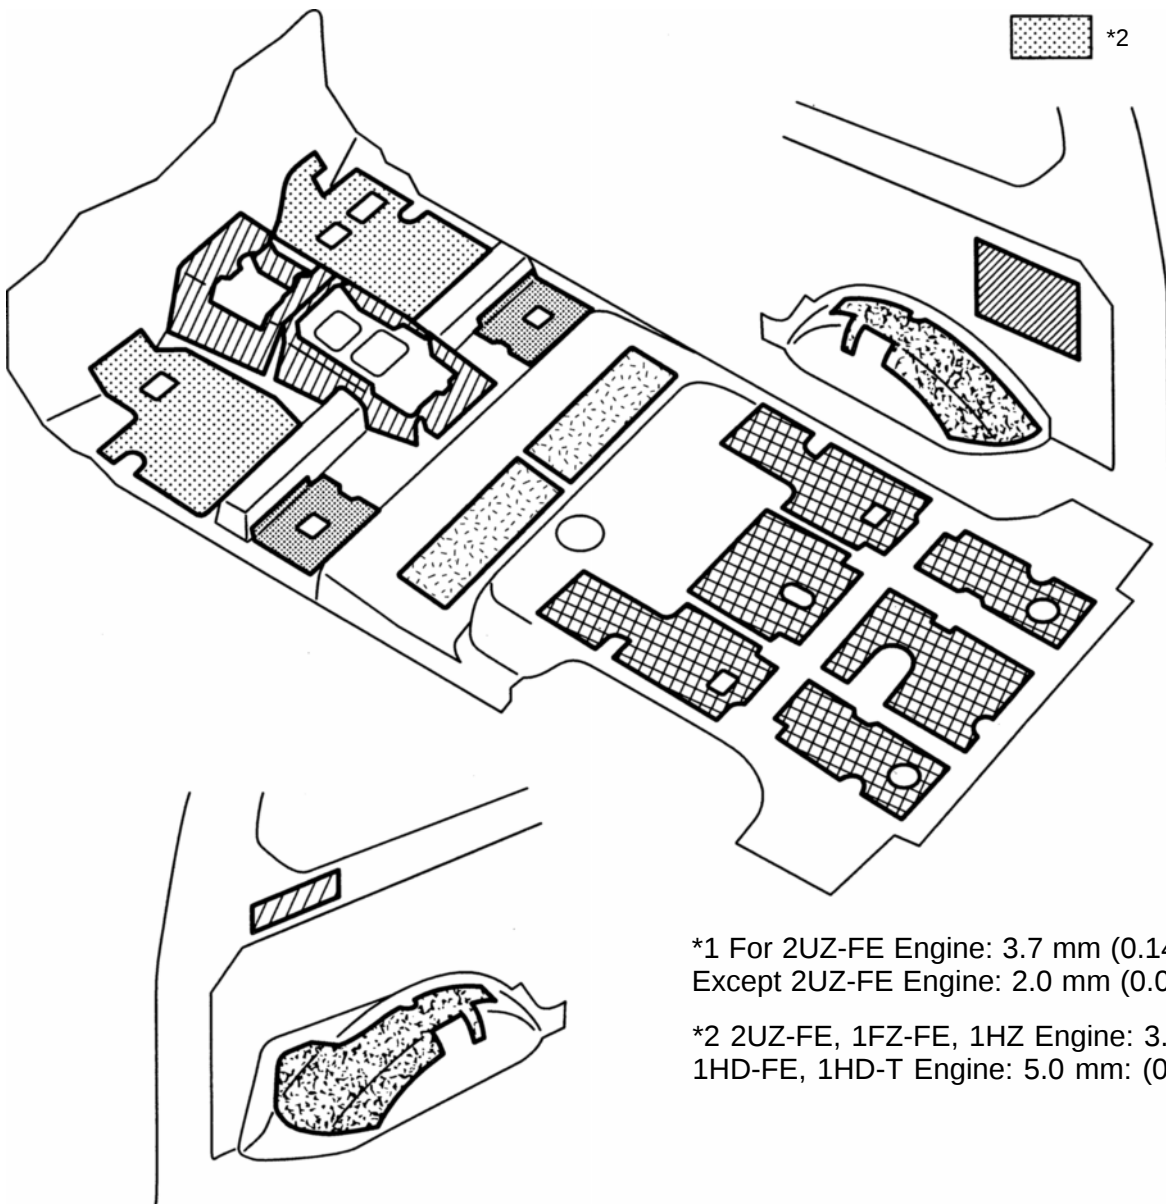

*1 For 2UZ-FE Engine: 3.7 mm (0.146 in.)
Except 2UZ-FE Engine: 2.0 mm (0.079 in.)

*2 2UZ-FE, 1FZ-FE, 1HZ Engine: 3.0 mm (0.118 in.)
1HD-FE, 1HD-T Engine: 5.0 mm (0.197 in.)

1 + 2 SEATER MODELS

Thickness of Asphalt Sheet

 0.8 mm (0.031 in.)

 1.5 mm (0.059 in.)


 2.0 mm (0.079 in.)

 3.0 mm (0.118 in.)

 3.5 mm (0.138 in.)

 3.7 mm (0.146 in.)

 *1

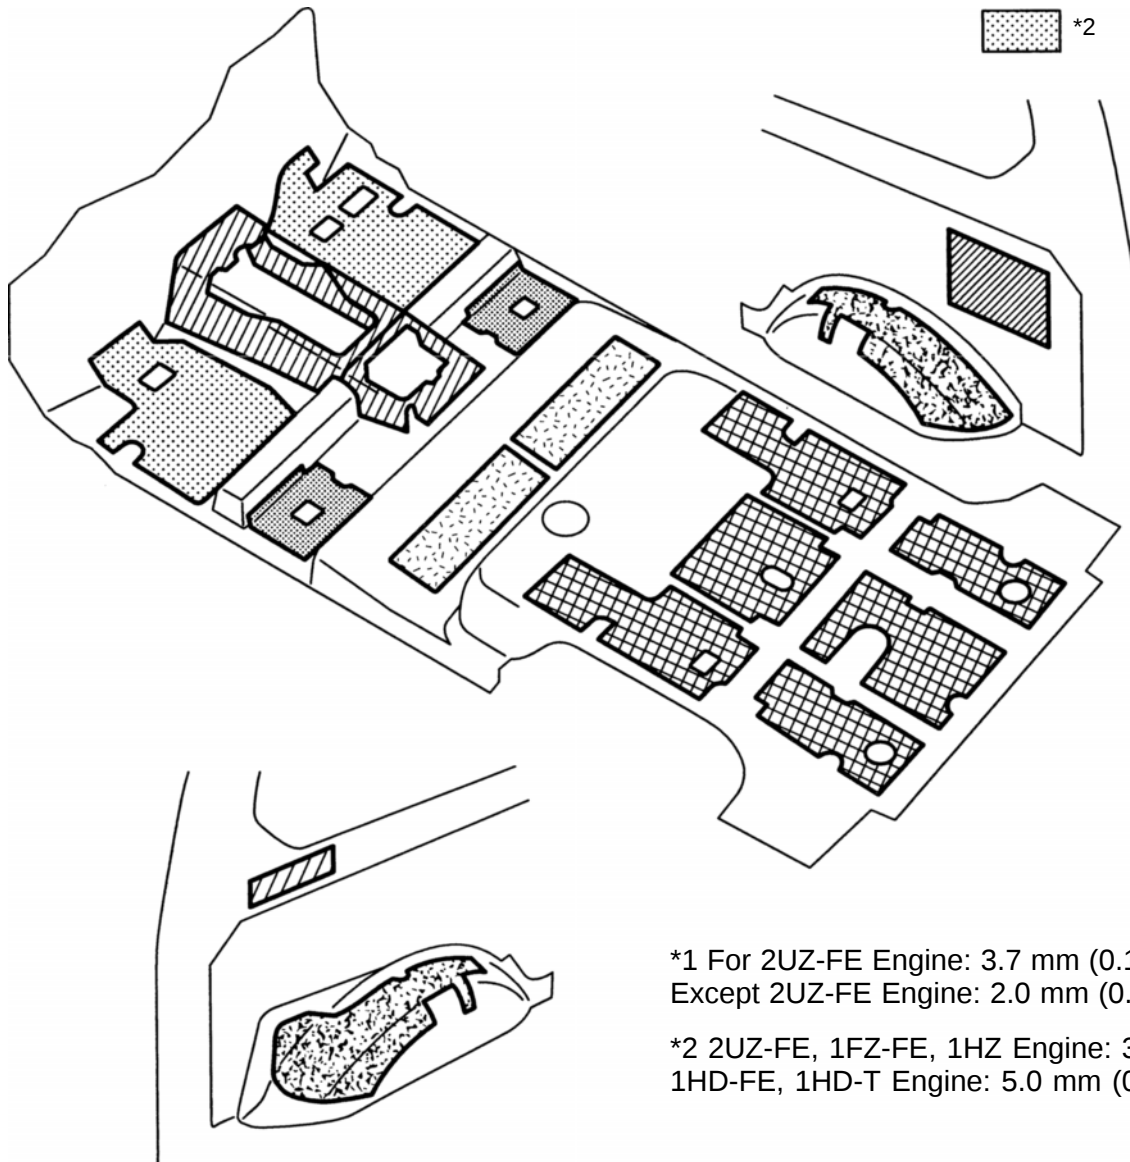 *2


*1 For 2UZ-FE Engine: 3.7 mm (0.146 in.)
 Except 2UZ-FE Engine: 2.0 mm (0.079 in.)

*2 2UZ-FE, 1FZ-FE, 1HZ Engine: 3.0 mm (0.118 in.)
 1HD-FE, 1HD-T Engine: 5.0 mm (0.197 in.)