


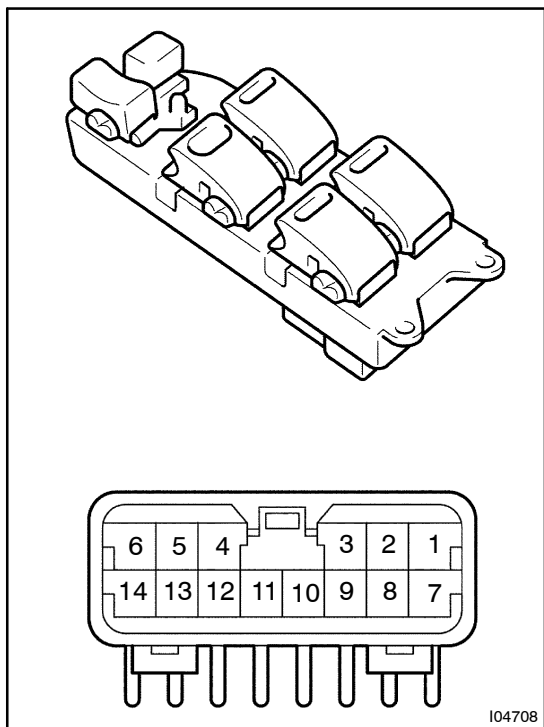


INSPECTION

- Master Switch:**
INSPECT DRIVER'S DOOR LOCK CONTROL SWITCH CONTINUITY

Switch position	Tester connection	Specified condition
LOCK	4 – 6 5 – 6	Continuity
OFF	–	No continuity
UNLOCK	4 – 12 5 – 12	Continuity


If continuity is not as specified, replace the switch.

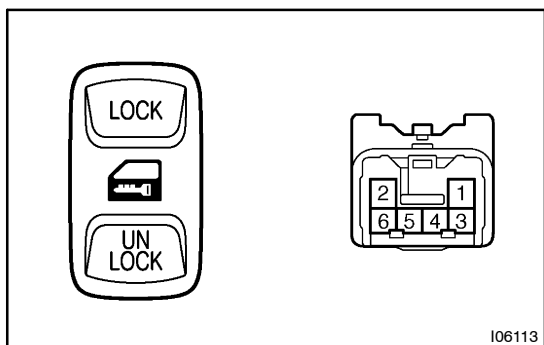

- w/o Power window:**
INSPECT DRIVER'S DOOR LOCK CONTROL SWITCH CONTINUITY

Switch position	Tester connection	Specified condition
LOCK	3 – 6	Continuity
OFF	–	No continuity
UNLOCK	5 – 6	Continuity

If continuity is not as specified, replace the switch.

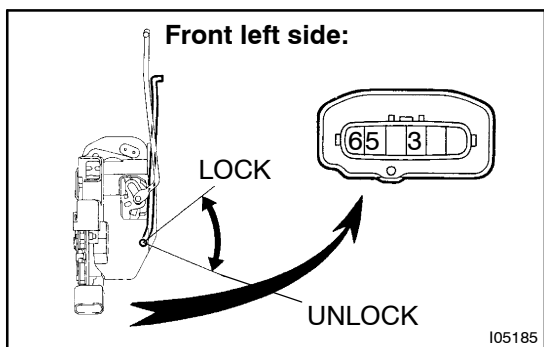


- Front left side door:**
INSPECT DOOR KEY LOCK AND UNLOCK SWITCH CONTINUITY

Switch position	Tester connection	Specified condition
LOCK	3 – 5	Continuity
OFF	–	No continuity
UNLOCK	3 – 6	Continuity

If continuity is not as specified, replace the switch.

- Front left side door:**
INSPECT DOOR KEY LOCK AND UNLOCK SWITCH CIRCUIT
(See page DI-810)

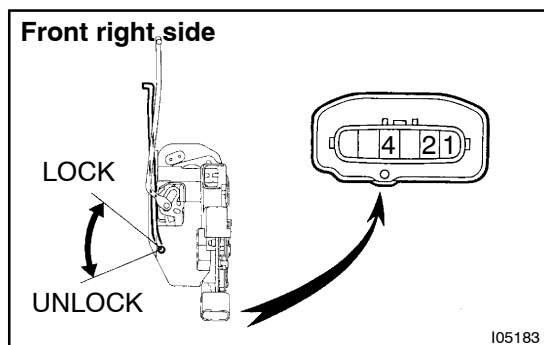


**5. Front right side door:
INSPECT DOOR KEY LOCK AND UNLOCK SWITCH
CONTINUITY**

Switch position	Tester connection	Specified condition
LOCK	2 – 4	Continuity
OFF	–	No continuity
UNLOCK	1 – 4	Continuity

If continuity is not as specified, replace the switch.


**6. Front right side door:
INSPECT DOOR KEY LOCK AND UNLOCK SWITCH
CIRCUIT**
(See page DI-810)

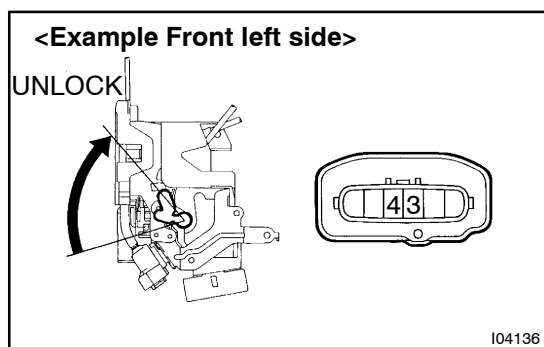

**7. Front door:
INSPECT DOOR UNLOCK DETECTION SWITCH CON-
TINUITY**

Switch position	Tester connection	Specified condition
OFF (Door Lock set to LOCK)	–	No continuity
ON (Door Lock set to UNLOCK)	3 – 4	Continuity


If continuity is not as specified, replace the switch.

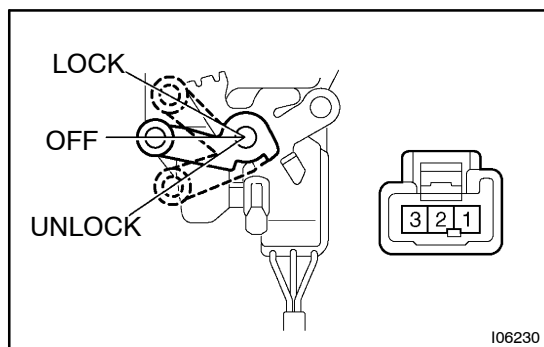

**8. INSPECT DOOR KEY LOCK AND UNLOCK SWITCH
CONTINUITY**

Switch position	Tester connection	Specified condition
LOCK	1 – 2	Continuity
OFF	–	No continuity
UNLOCK	1 – 3	Continuity

If continuity is not as specified, replace the switch.

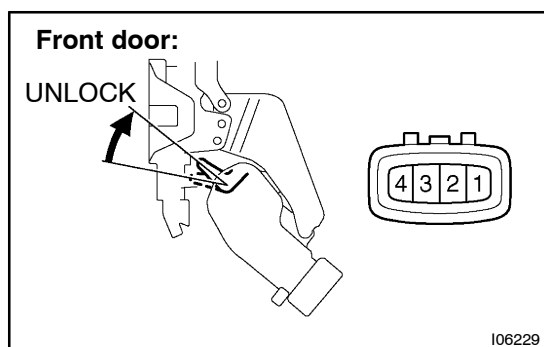



**9. Front door:
INSPECT DOOR UNLOCK DETECTION SWITCH CON-
TINUITY**

Switch position	Tester connection	Specified condition
OFF (Door Lock set to LOCK)	–	No continuity
ON (Door Lock set to UNLOCK)	1 – 4	Continuity

If continuity is not as specified, replace the switch.

Rear door:

UNLOCK



I06228



10. Rear door:**INSPECT DOOR UNLOCK DETECTION SWITCH CONTINUITY**

Switch position	Tester connection	Specified condition
OFF (Door Lock set to LOCK)	–	No continuity
ON (Door Lock set to UNLOCK)	1 – 4	Continuity

If continuity is not as specified, replace the switch.

Back door:

UNLOCK





I06227

11. Back door:**INSPECT DOOR UNLOCK DETECTION SWITCH CONTINUITY**

Switch position	Tester connection	Specified condition
OFF (Door Lock set to LOCK)	–	No continuity
ON (Door Lock set to UNLOCK)	1 – 4	Continuity

If continuity is not as specified, replace the switch.

UNLOCK



I06225



12. Front door:**INSPECT DOOR LOCK MOTOR OPERATION**

- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (–) lead to terminal 2, and check that the door lock link moves to UNLOCK position.

- (b) Reverse the polarity and check that the door lock link moves to LOCK position.



If operation is not as specified, replace the door lock assembly.

LOCK



I06226


UNLOCK




I06223

13. Rear door:**INSPECT DOOR LOCK MOTOR OPERATION**

- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (–) lead to terminal 2, and check that the door lock link moves to UNLOCK position.

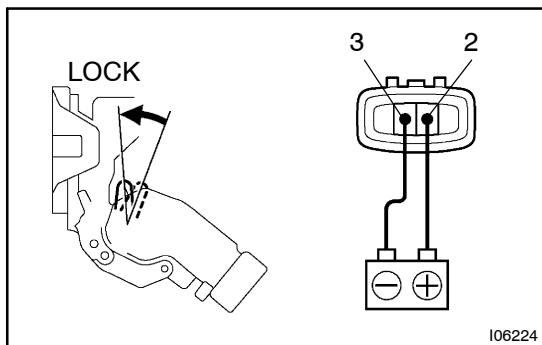


- (b) Reverse the polarity and check that the door lock link moves to LOCK position.
If operation is not as specified, replace the door lock assembly.

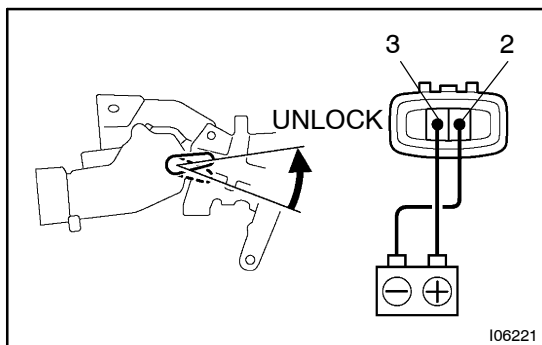


**14. Back door:
INSPECT DOOR LOCK MOTOR OPERATION**

- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2, and check that the door lock link moves to UNLOCK position.

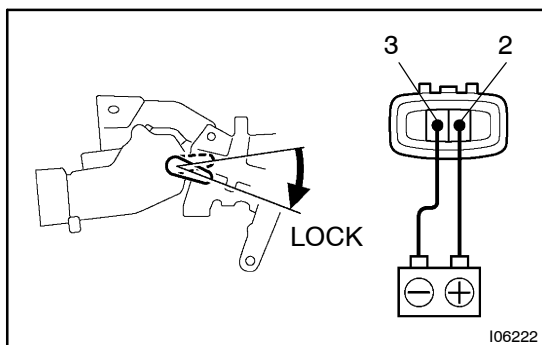


- (b) Reverse the polarity and check that the door lock link moves to LOCK position.
If operation is not as specified, replace the door lock assembly.

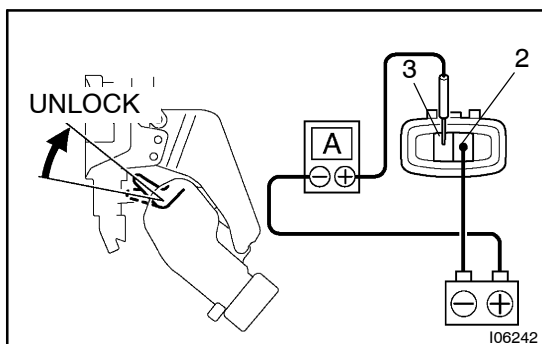


**15. Front door:
INSPECT PTC THERMISTOR OPERATION (Using an ammeter)**

- (a) Connect the negative (-) lead from the battery to terminal 2.
(b) Connect the positive (+) lead from the ammeter to terminal 3 and the negative (-) lead to battery negative (-) terminal, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

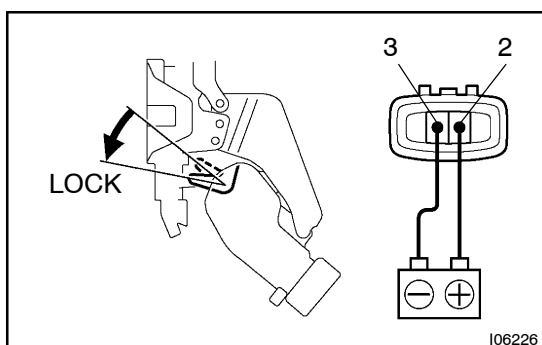



- (c) Disconnect the leads from terminals.
(d) Approximately 60 seconds later, connect the positive (+) lead from the battery to terminal 2 and the negative (-) lead to terminal 3, and check that the door lock moves to the LOCK position.
If operation is not as specified, replace the door lock assembly.

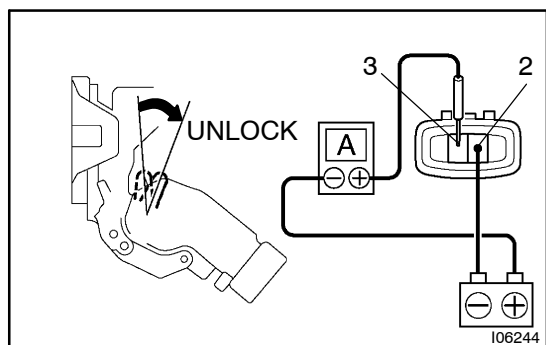

16. Rear door:
INSPECT PTC THERMISTOR OPERATION (Using an ammeter)

- Connect the negative (-) lead from the battery to terminal 2.
- Connect the positive (+) lead from the ammeter to terminal 3 and the negative (-) lead to battery negative (-) terminal, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.
- Disconnect the leads from terminals.
- Approximately 60 seconds later, connect the positive (+) lead from the battery to terminal 2 and the negative (-) lead to terminal 3, and check that the door lock moves to the LOCK position.



If operation is not as specified, replace the door lock assembly.

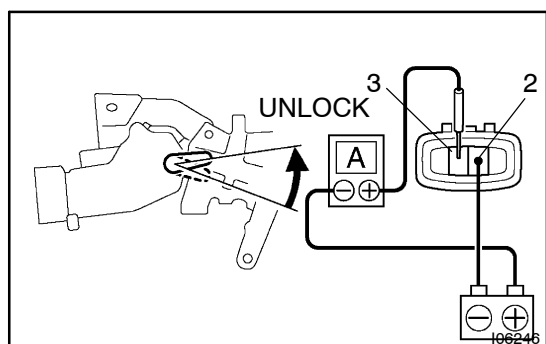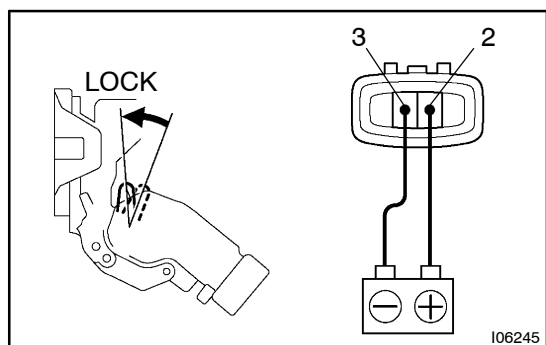

17. Back door:
INSPECT PTC THERMISTOR OPERATION (Using an ammeter)


- Connect the negative (-) lead from the battery to terminal 2.
- Connect the positive (+) lead from the ammeter to terminal 3 and the negative (-) lead to battery negative (-) terminal, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.
- Disconnect the leads from terminals.
- Approximately 60 seconds later, connect the positive (+) lead from the battery to terminal 2 and the negative (-) lead to terminal 3, and check that the door lock moves to the LOCK position.

If operation is not as specified, replace the door lock assembly.

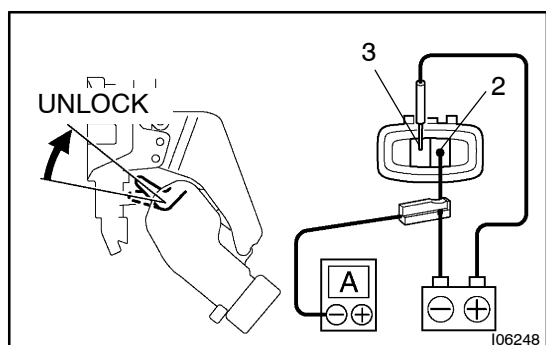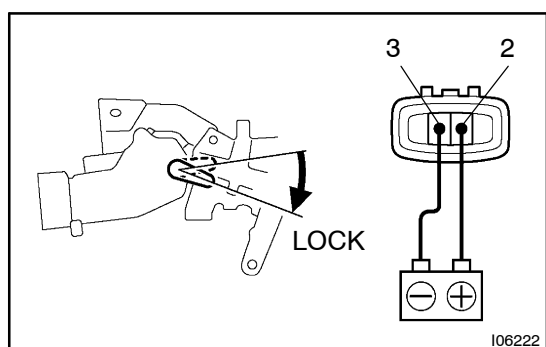


18. Front door:
INSPECT PTC THERMISTOR OPERATION (Using an ammeter with a current-measuring probe)


- Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2.
- Attach a current-measuring probe to either the positive (+) lead or the negative (-) lead, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

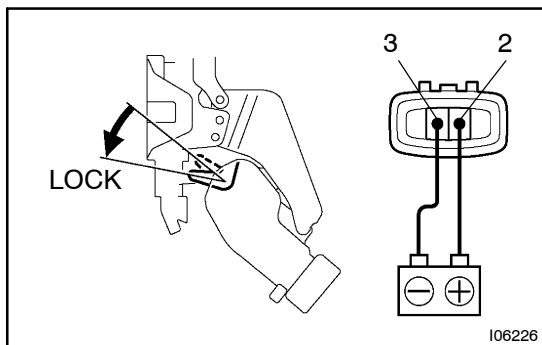


- (c) Disconnect the leads from terminals.
 - (d) Approximately 60 seconds later, reverse the polarity, and check that the door lock moves to the LOCK position.
- If operation is not as specified, replace the door lock assembly.

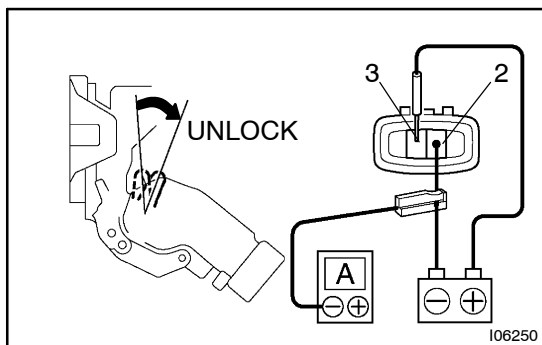


- 19. Rear door:**
INSPECT PTC THERMISTOR OPERATION (Using an ammeter with a current-measuring probe)
- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2.
 - (b) Attach a current-measuring probe to either the positive (+) lead or the negative (-) lead, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

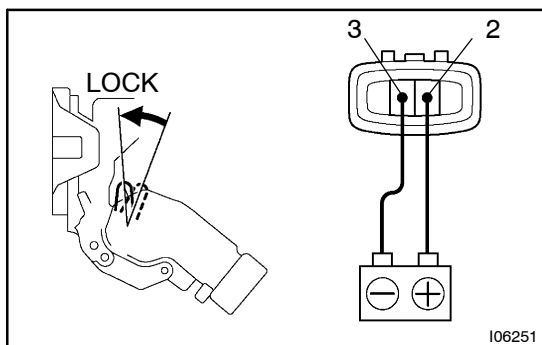


- (c) Disconnect the leads from terminals.
 - (d) Approximately 60 seconds later, reverse the polarity, and check that the door lock moves to the LOCK position.
- If operation is not as specified, replace the door lock assembly.

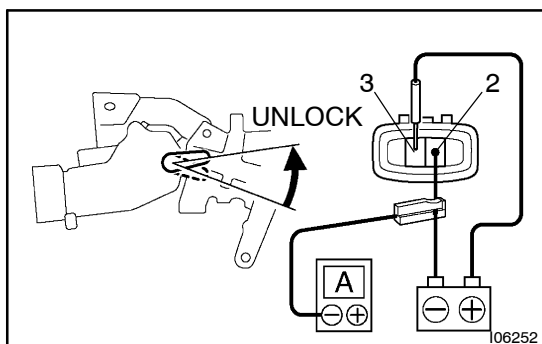

- 20. Back door:**
INSPECT PTC THERMISTOR OPERATION (Using an ammeter with a current-measuring probe)
- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2.
 - (b) Attach a current-measuring probe to either the positive (+) lead or the negative (-) lead, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

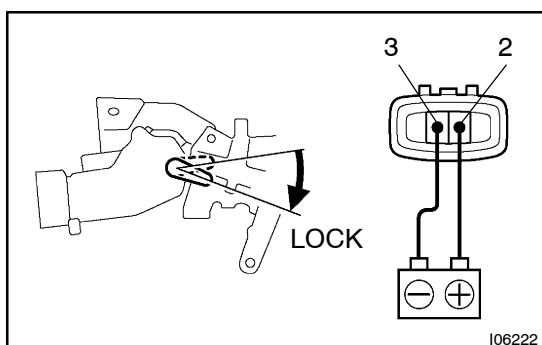

- (c) Disconnect the leads from terminals.
 - (d) Approximately 60 seconds later, reverse the polarity, and check that the door lock moves to the LOCK position.
- If operation is not as specified, replace the door lock assembly.

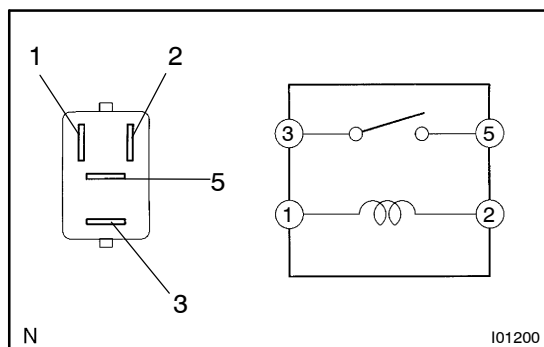

21. INSPECT DOOR LOCK RELAY (LOCK and UNLOCK) CONTINUITY

Condition	Tester connection	Specified condition
Constant	1 – 2	Continuity
Apply B+ between terminals 1 and 2.	3 – 5	Continuity

If continuity is not as specified, replace the relay.