

REMOVAL

1. REMOVE THESE PARTS:

(See page BO-67)


- (a) w/ High-Mount Stop Light:
Hight-mount stop light
- (b) Back door garnish
- (c) Back door trim

2. REMOVE REAR WIPER ARM


(See page BO-67)

3. REMOVE BACK WINDOW OUTSIDE MOULDING

Using a knife, cut off the moulding as shown.

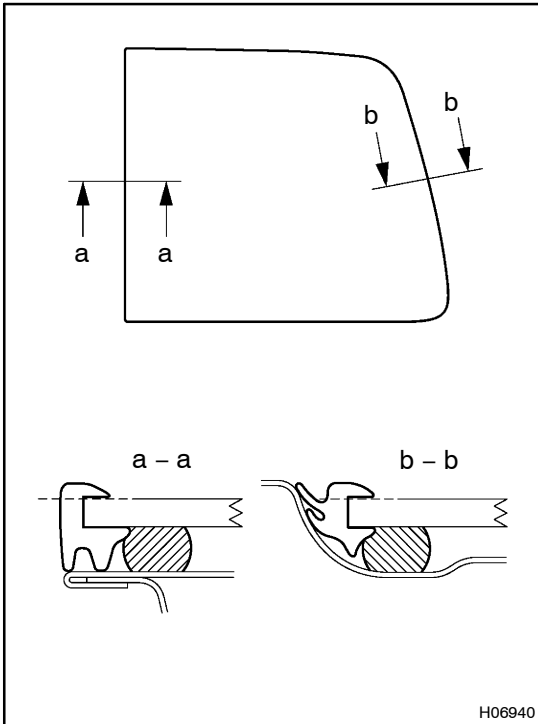

H06940

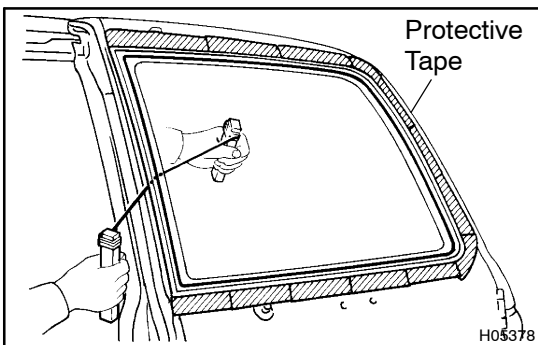

4. REMOVE BACK DOOR GLASS

- (a) Push piano wire through from interior.
- (b) Tie both wire ends to wooden blocks or similar object.

HINT:

Apply protective tape to the outer surface to keep the surface from the being scratched.


NOTICE:

When separating the glass, take care not to damage the paint and exterior.


- (c) Cut the adhesive by pulling the piano wire around it.

HINT:

Cut the adhesive area as shown in the illustration, leaving the adhesive where the clips are.

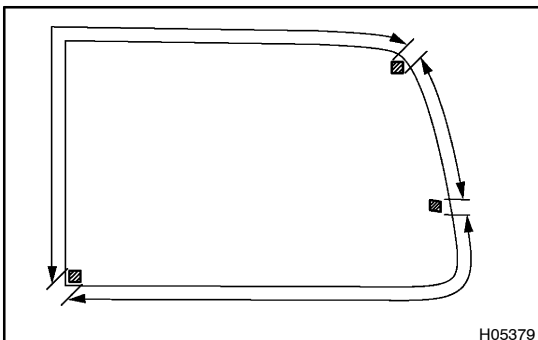

H05379

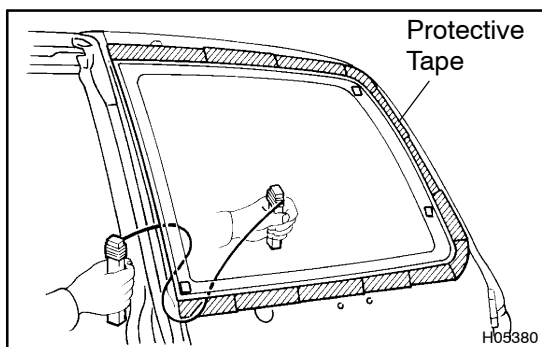

- (d) Let the piano wire pass as shown in the illustration, cut off the adhered part to the clips.

NOTICE:

Do not damage the glass retainers.

- (e) Remove the glass.

NOTICE:

Leave as much of the adhesive on the body as possible when cutting off the glass.