

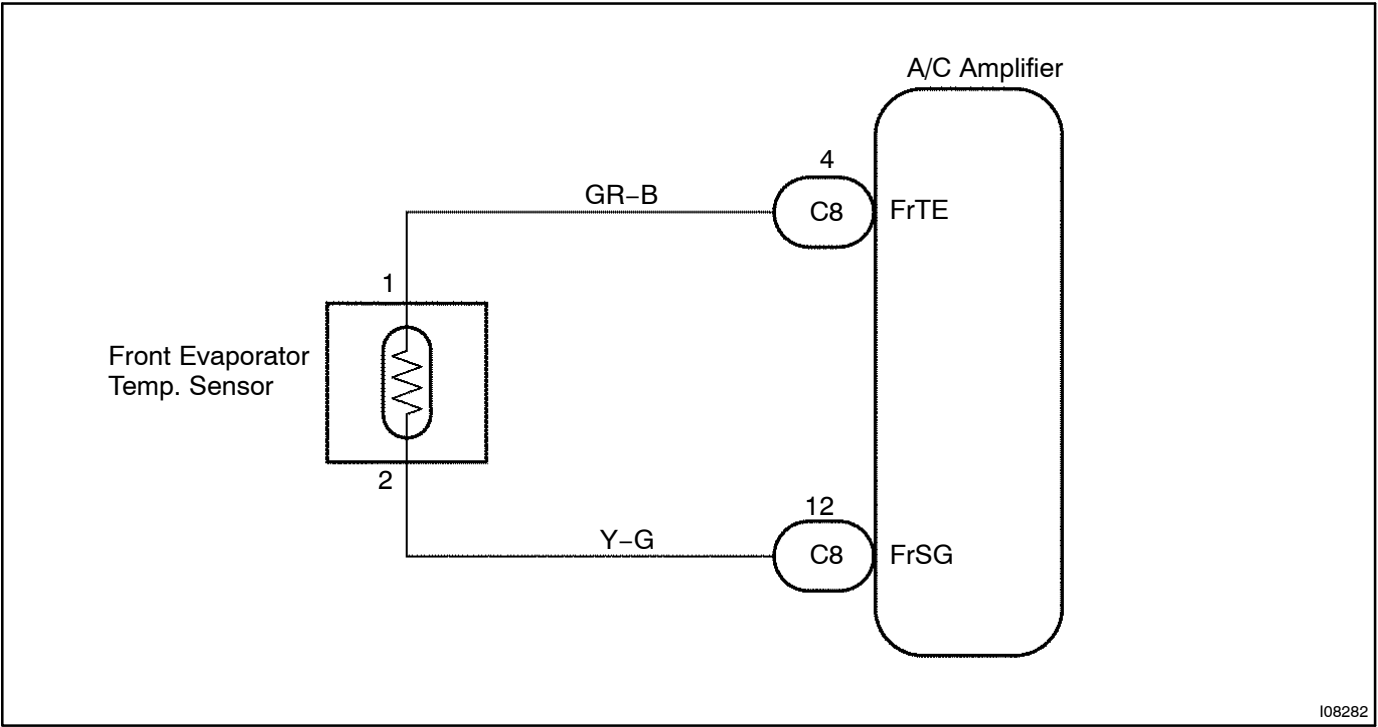
DTC	RrDEF, FOOT	Front Evaporator Temperature Sensor circuit
------------	--------------------	--

CIRCUIT DESCRIPTION

This sensor detects the temperature inside the cooling unit and sends the appropriate signals to the A/C amplifier.

Blinking light	Detection Item	Trouble Area
RrDEF FOOT	Open or short in front evaporator temperature sensor circuit.	• Front evaporator temperature sensor. • Harness or connector between front evaporator temperature sensor and A/C amplifier. • A/C amplifier.

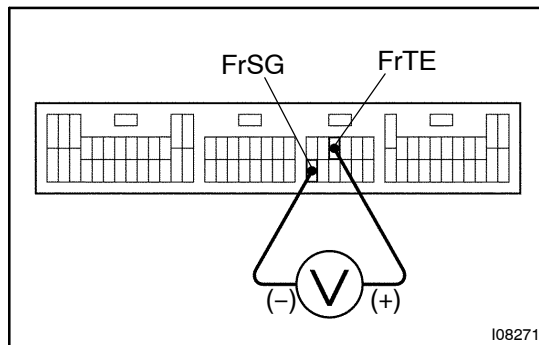
WIRING DIAGRAM



I08282

INSPECTION PROCEDURE

- | | |
|----------|--|
| 1 | Check voltage between terminals FrTE and FrSG of A/C amplifier connector. |
|----------|--|

**PREPARATION:**

Remove A/C amplifier with connectors still connected.

CHECK:

- (a) Turn ignition switch ON.
- (b) Measure voltage between terminals FrTE and FrSG of A/C amplifier connector at each temperature.

OK:**Voltage :**

at 0°C (32°F) : 2.0 – 2.4 V

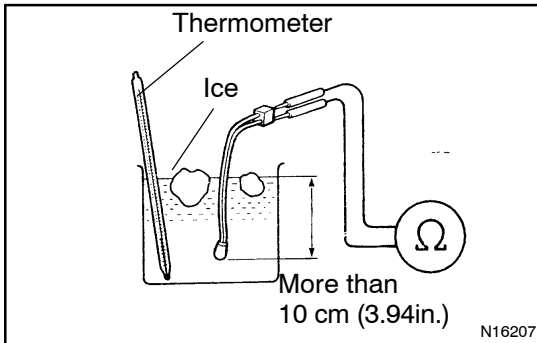
at 15°C (59°F) : 1.4 – 1.8 V

HINT:

As the temperature increases, the voltage decreases.

NG**Go to step 2.****OK**

Proceed to next circuit inspection shown on problem symptoms table (See page [DI-630](#)). However, if RrDEF and FOOT is light up, check and replace A/C amplifier.

2 Check front evaporator temperature sensor.**PREPARATION:**

Remove front evaporator temperature sensor (See page [AC-23](#)).

CHECK:

Measure resistance between terminals 1 and 2 of evaporator temperature sensor connector at each temperature.

OK:**Resistance :**

at 0°C (32°F) : 4.5 – 5.2 kΩ

at 15°C (59°F) : 2.0 – 2.7 kΩ

HINT:

As the temperature increases, the resistance decreases.

NG**Replace front evaporator temperature sensor.****OK****3 Check harness and connector between A/C amplifier and front evaporator temperature sensor (See page [IN-34](#)).****NG****Repair or replace harness or connector.****OK****Check and replace A/C amplifier.**