

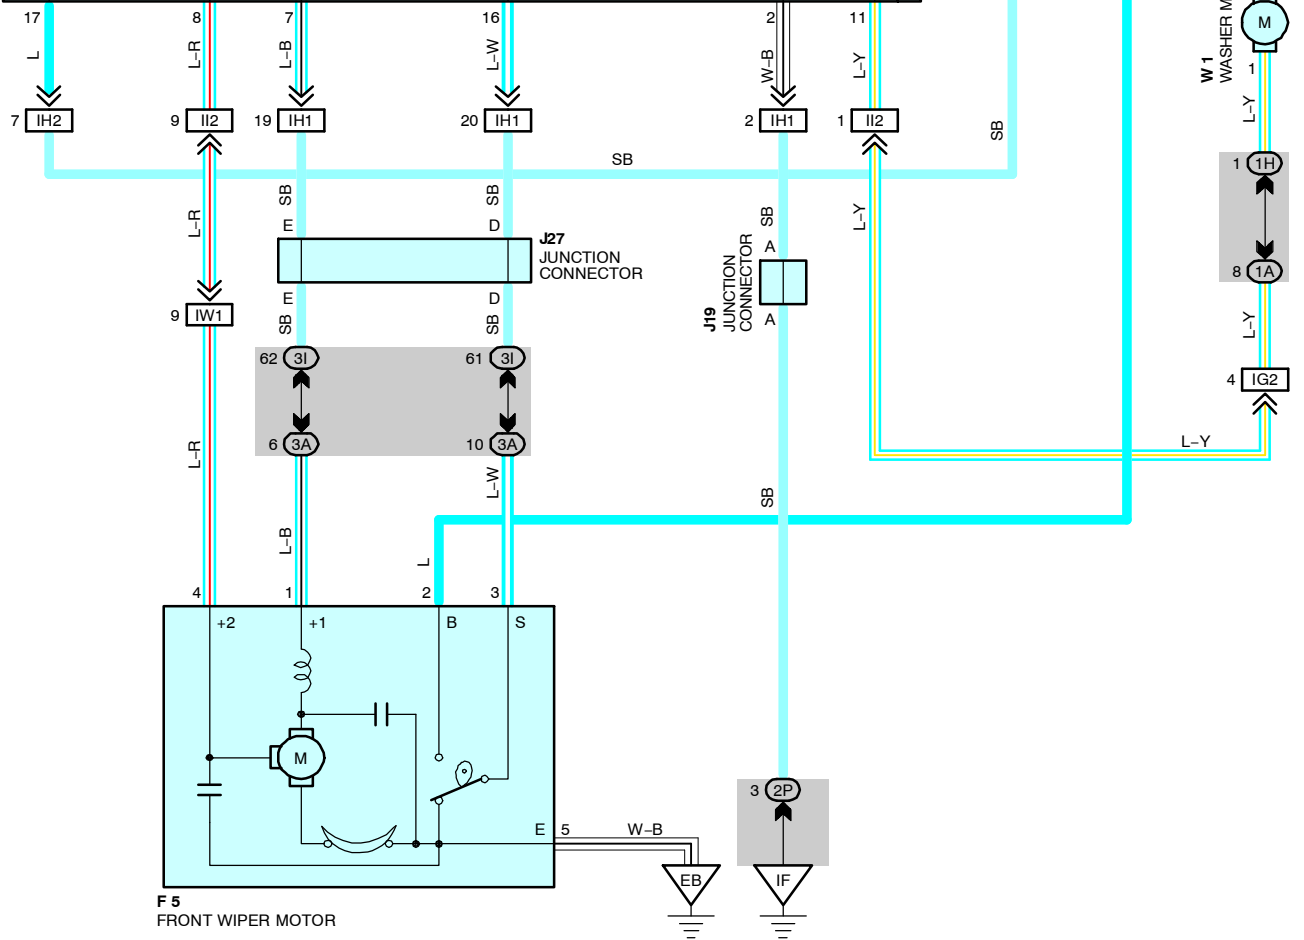


FRONT WIPER AND WASHER

C19
FRONT WIPER AND WASHER SW [COMB. SW]

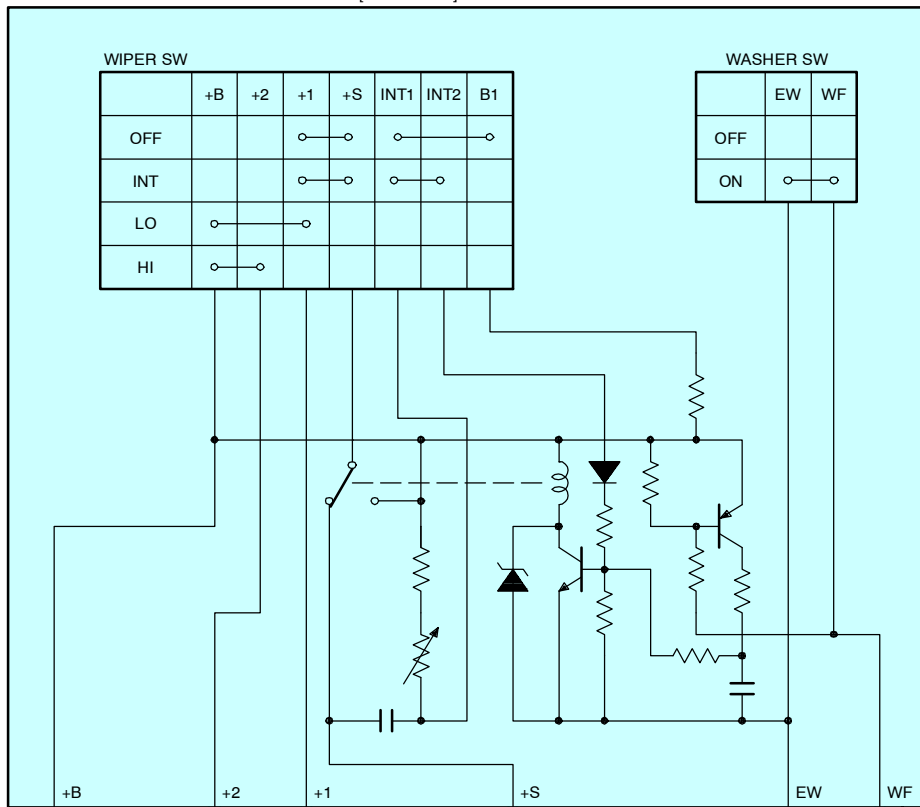

FROM POWER SOURCE SYSTEM (SEE PAGE 62)

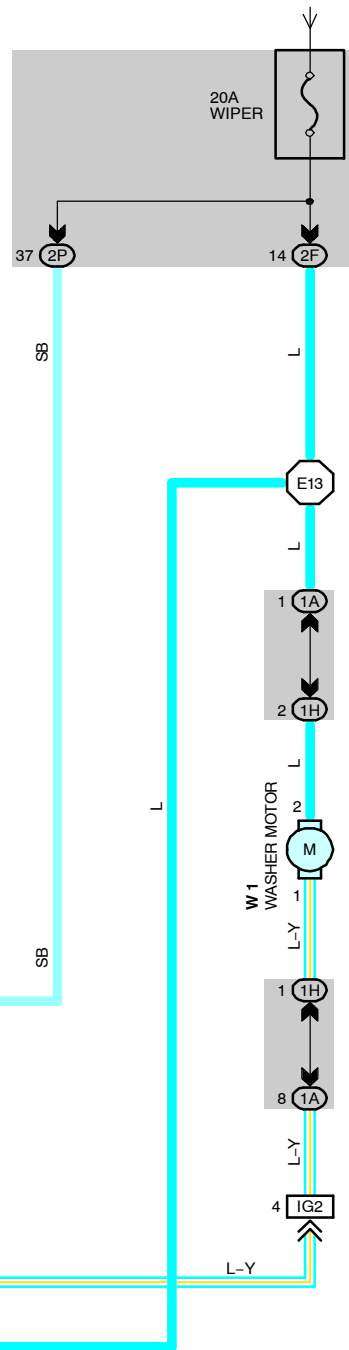

SYSTEM OUTLINE

When the ignition SW turned on, the current from the **WIPER** fuse flows to the front wiper and washer SW **TERMINAL 17**, and front wiper motor **TERMINAL 2**.

1. LOW POSITION

When the wiper SW is turned to **LO** position, the current flows from the front wiper and washer SW **TERMINAL 17** to **TERMINAL 7** to front wiper motor **TERMINAL 1** to **TERMINAL 5** to **GROUND**, and operates the front wiper motor at low speed.

2. HIGH POSITION

When the wiper SW is turned to **HI** position, the current flows from the front wiper and washer SW **TERMINAL 17** to **TERMINAL 8** to front wiper motor **TERMINAL 4** to **TERMINAL 5** to **GROUND**, and operates the front wiper motor at high speed.

3. INT POSITION

When the wiper SW is turned to **INT** position, the relay operates and the current which is connected by the relay function flows from the front wiper and washer SW **TERMINAL 17** to **TERMINAL 2** to **GROUND**, and operates the wipe.

The intermittent operation is controlled by the charge/discharge function of the condenser installed in the relay, and the intermittent time is controlled by a time control SW to change the charging time of the condenser.

4. WASHER CONTINUOUS OPERATION

When the washer SW is turned on, the current flows from the washer motor **TERMINAL 2** to **TERMINAL 1** to front wiper and washer SW **TERMINAL 11** to **TERMINAL 2** to **GROUND**, operates the washer motor and the window washer emits a water spray. This causes the current to flow to the washer continuous operation circuit in front wiper and washer SW **TERMINAL 11** to **TERMINAL 7** to front wiper motor **TERMINAL 1** to **TERMINAL 5** to **GROUND**, and operates the wiper.

SERVICE HINTS

C19 FRONT WIPER AND WASHER SW [COMB. SW]

- 2-GROUND : Always continuity
- 17-GROUND : Approx. **12** volts with ignition SW at **ON** or **ST** position
- 7-GROUND : Approx. **12** volts with front wiper and washer SW at **LO** position
: Approx. **12** volts **1.6** to **10.7** seconds intermittently with the front wiper and washer SW at **INT** position
- 16-GROUND : Approx. **12** volts with ignition SW on unless the front wiper motor at **STOP** position
- 8-GROUND : Approx. **12** volts with front wiper and washer SW at **HI** position

F5 FRONT WIPER MOTOR

- 2-3 : Closed unless the wiper motor at **STOP** position



: PARTS LOCATION

Code	See Page	Code	See Page	Code	See Page
C19	38	J19	39	W1	37
F5	36	J27	39		



: JUNCTION BLOCK AND WIRE HARNESS CONNECTOR

Code	See Page	Junction Block and Wire Harness (Connector Location)
1A	21	Engine Room No.2 Wire and Engine Room J/B (Engine Compartment Left)
1H	21	Engine Room Main Wire and Engine Room J/B (Engine Compartment Left)
2F	24	Engine Room No.2 Wire and Cowl Side J/B LH (Left Kick Panel)
2P	26	Instrument Panel Integration Wire and Cowl Side J/B LH (Left Kick Panel)
3A	30	Engine Room No.2 Wire and Cowl Side J/B RH (Right Kick Panel)
3I	30	Instrument Panel Integration Wire and Cowl Side J/B RH (Right Kick Panel)



: CONNECTOR JOINING WIRE HARNESS AND WIRE HARNESS

Code	See Page	Joining Wire Harness and Wire Harness (Connector Location)
IG2	48	Engine Room No.2 Wire and Dash Wire (Behind the Combination Meter)
IH1	48	Instrument Panel Integration Wire and Column Wire (Near the Ignition SW)
IH2		
II2	48	Column Wire and Dash Wire (Near the Ignition SW)
IW1	52	Engine Room No.2 Wire and Dash Wire (Behind the Glove Box)

FRONT WIPER AND WASHER

 : GROUND POINTS

Code	See Page	Ground Points Location
EB	44	Front Right Side of Fender Apron
IF	46	Set Bolt of Cowl Side J/B LH

 : SPLICE POINTS

Code	See Page	Wire Harness with Splice Points	Code	See Page	Wire Harness with Splice Points
E13	44	Engine Room No.2 Wire			

