


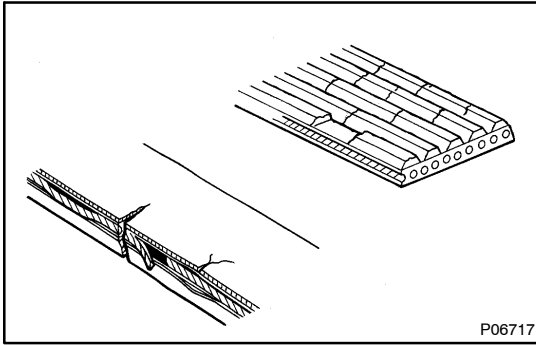

## DRIVE BELT INSPECTION

SR0LW-03

### INSPECT DRIVE BELT

Visually check the belt for excessive wear, frayed cords, etc. If any defect has been found, replace the drive belt.

#### HINT:

Cracks on the rib side of a belt are considered acceptable. If the belt has chunks missing from the ribs, it should be replaced.